

BEK KIT (BACKUP EMERGENCY KIT) WITH MAGNILUMEN PLUS BAR + EM DRIVER AND BATTERY




The BEK Kit will now be the easiest and most versatile Emergency Backup kit. This kit will be a separately wired kit within the fixture, not needing to be linked to the existing driver. The kit comes in a (1) 2 ft. bar setup, in 40K color temperature. Mounting hardware includes whip, and test button with charging indicator light. Can be paired with most linear fixtures, regardless of LED or fluorescent tube fixtures. This kit will 90-minutes of light. Features a 5-year warranty. Follow all local fire egress codes and Foot Candle requirements.

NOTE: Product may be installed in non-ZLEDLighting/Magnilumen Plus kits or drivers.

PRODUCT SPECIFICATIONS

WATTAGES	15W
COLOR TEMPS	40K
VOLTAGE INPUT	120/277V
CHARGE TIME	24 hours
EMERGENCY TIME	90 minute
TEMP RATING	0° to 50°C
OPERATING TEMP	32° to 104°F
BATTERY LIFE	500 cycles
KIT INCLUDES	1 2ft. bar, EM driver, battery pack, harnesses, screws and test button.
WARRANTY	5 year


PART NUMBER BEK12-15W-40K-2250L-PLUS

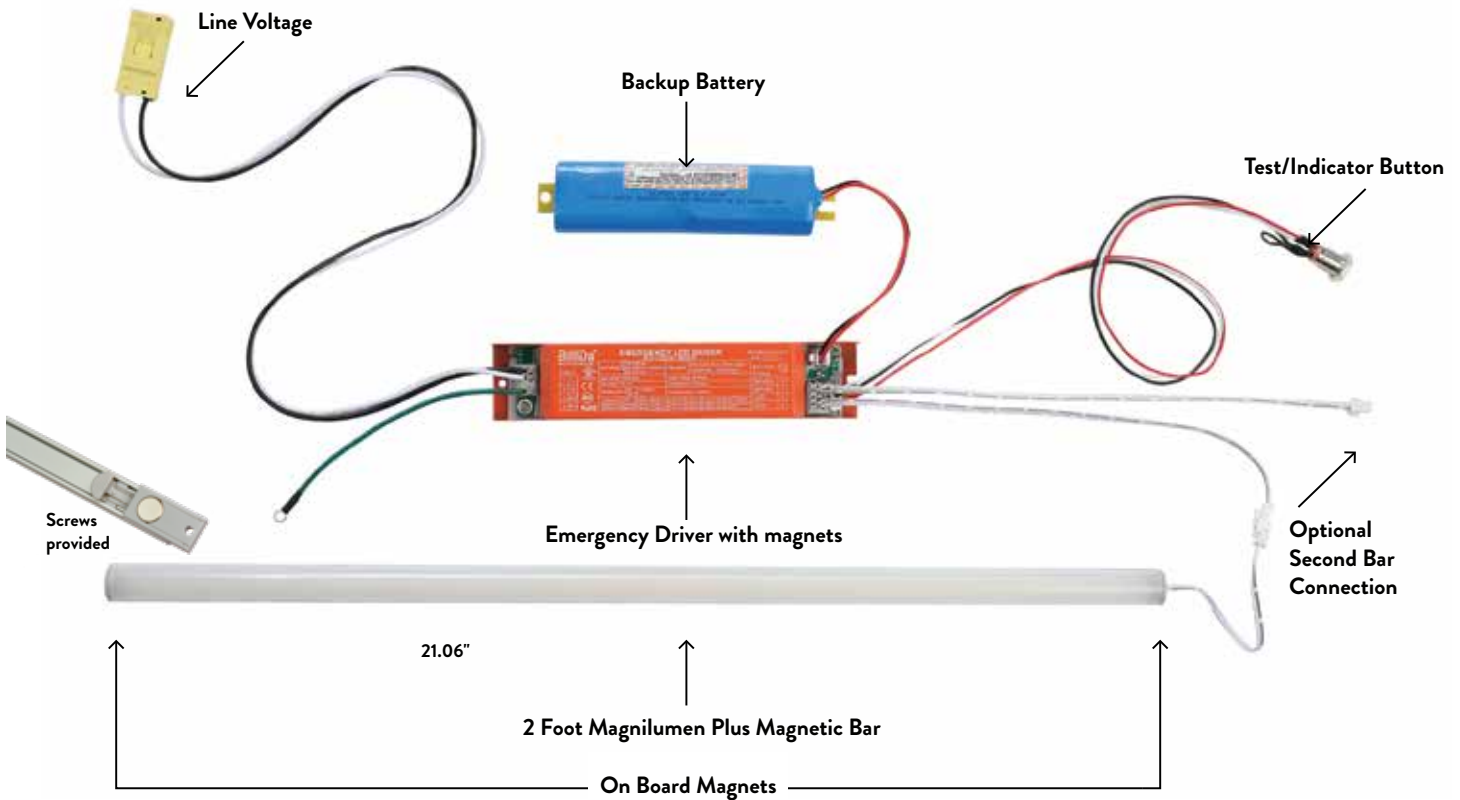

BEK KIT (BACKUP EMERGENCY KIT) WITH MAGNILUMEN PLUS BAR + EM DRIVER AND BATTERY

KIT INSTALLATION

EMERGENCY BACK-UP DRIVER WITH ONE LED BAR

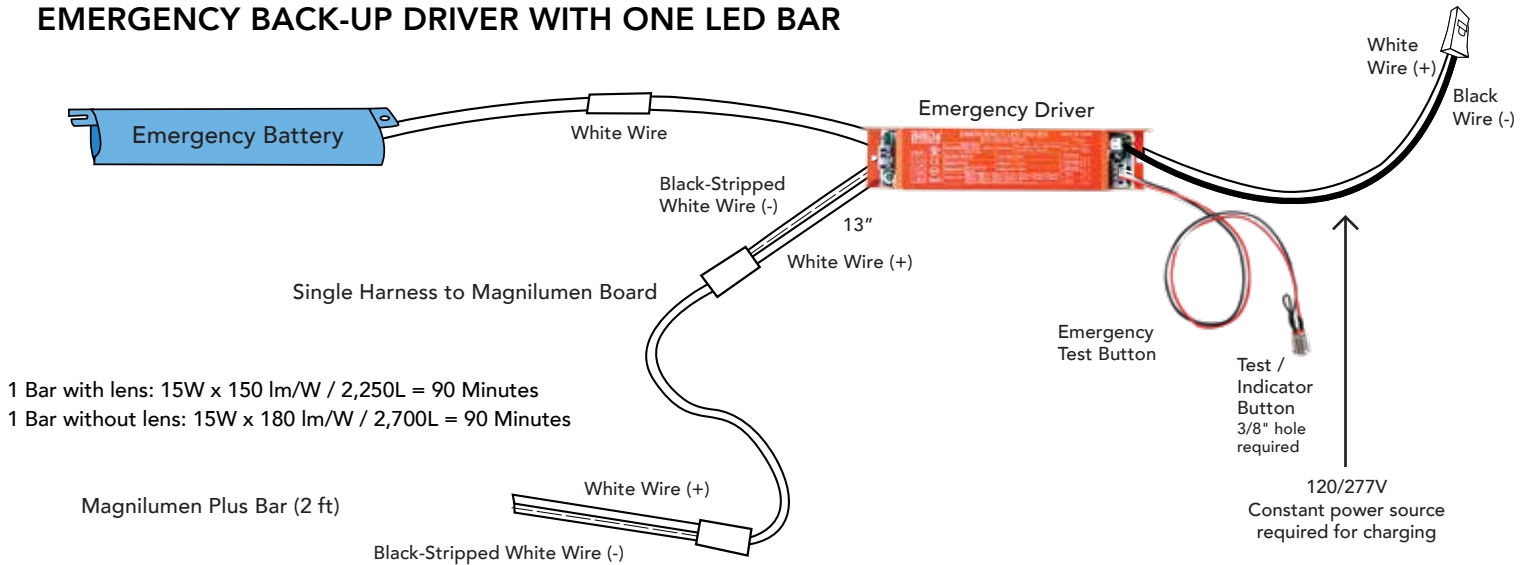

INSTALLATION INSTRUCTIONS

1. **Before beginning:** Carefully read all safety instructions. Ensure that a qualified electrician installs the kits. Turn off the power before starting.
2. **Access the fixture:** Open the cover and remove the lamps.
3. **Remove the ballast cover.**
4. **Make connections:** Connect the emergency driver to the emergency circuit. Connect battery to emergency driver. Follow the enclosed diagram/instructions for proper connections.
5. **Install the LED bar:** Insert the 2-foot LED bar into the fixture, securing it with magnets and screws.
6. **Connect the harness:** Attach the harness from the LED bar to the harness connected to the emergency driver.
7. **Install test switch/indicator light:** Find safe and visible location to drill hole 3/8". Mount switch/indicator light connects to the emergency driver.
8. **Secure the ballast cover:** Lock the ballast cover back into place.
9. **Reinstall the lamps:** Place the lamps back into the fixture.
10. **Test the BEK Kit:** Ensure the BEK Kit functions properly before closing the fixture.
11. **Close the fixture:** Close the cover.

WIRING DIAGRAM

