

Job / Project Name	
Product Model Number	
Quantity	
Date	

APPLICATIONS

Sign boxes, channel letters, store windows and custom decoration.

PRODUCT FEATURES

- Wattages: 1.2W
- Color Temperatures: 65K
- Voltage Input: 12VDC
- Lumens Per Module: 144 lm/module
- Operating Temperature: -4 to 104F
- LED Lifespan: 50,000 hours
- Beam Angle: 160 degrees
- Warranty: 2 years
- Adhesive 3M tape mounting.
- Pair with a minimum 60W power supply. Sold separately.



SPECIFICATIONS

PRODUCT #	MODULE PER STRING	DIMENSIONS (WxLxH)	WATTAGE PER MODULE	TOTAL LENGTH	LUMENS (+/-10%)
MOD-R-TRAY-UL	50	.59" x 2.83" x .43"	1.2	26'	7,200

POWER SUPPLIES & ACCESSORIES

PRODUCT #	WATTAGES	INPUT VOLTAGE	OUTPUT VOLTAGE	DIMENSIONS (WxLxH)
60W-PS-12V-120V-IP67	60W	85-265VAC	12VDC	5.65" x 1.85" x 1.33"
100W-PS-12V-120V-IP67	100W	85-265VAC	12VDC	8.26" x 2.81" x 1.79"
150W-PS-12V-120V-IP67	150W	85-265VAC	12VDC	10.07" x 2.65" x 1.76"
200W-PS-12V-120.277V-IP67	200W	85-265VAC	12VDC	9.64" x 3.74" x 1.96"




NOTE: Install power supply away from the LED modules to ensure ample heat dissipation. Some power supplies have 2 lead cables on the low voltage output side. Combine the positive wires from both cables as well as the negatives to supply the full wattage.

INSTALLATION

Shut off incoming power. Hardwire power supplies should be installed by a qualified electrician.

Size power supply a minimum of 10% higher than the load. See back for more information about installation.

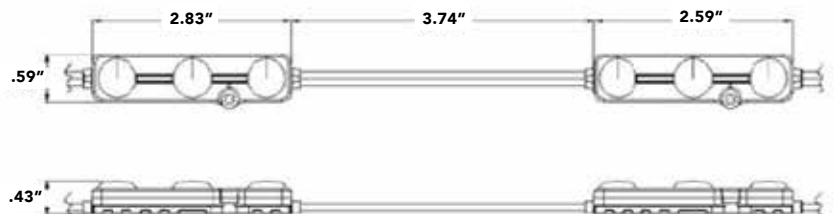

Specifications and actual product may vary.

Office (800) 679-9243 • sales@zled-lighting.com • www.zled-lighting.com

05/16/2023