


LED WALL PACK - WATTAGE AND CCT SELECTABLE



PRODUCT FEATURES


INPUT VOLTAGE	120-277VAC
EFFICACY	125 lm/W
CRI	>80
DIMMABLE	0-10V
BEAM ANGLE	120 degrees
LED LIFESPAN**††* #fl	50,000 hours
RATED	IP65
WARRANTY	5 years

3 WATTAGE OPTIONS

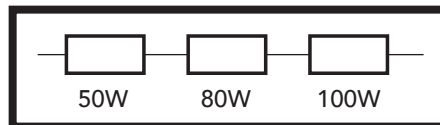


50, 80, 100W selectable

3 COLOR TEMP OPTIONS

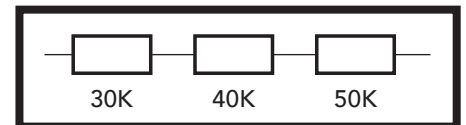

30, 40, 50K selectable

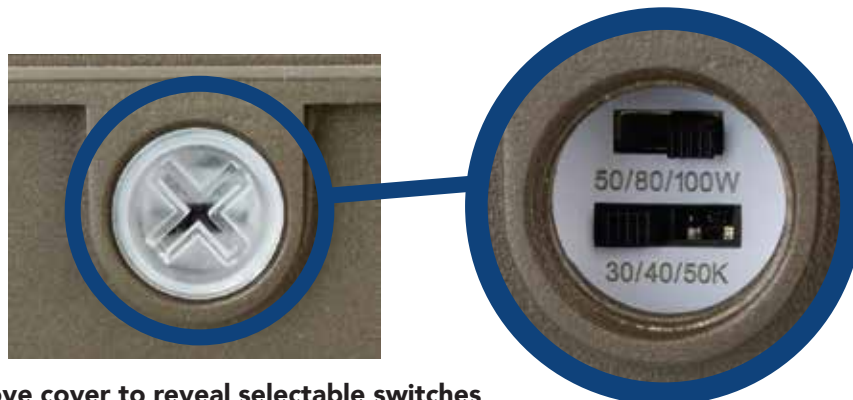

Remove cover to reveal selectable switches

Specifications and actual product may vary.

Office (800) 679-9243 • sales@zledlighting.com • www.zledlighting.com

IP65



WATTAGE
SELECTABLE

CCT
SELECTABLE



APPLICATIONS





Exterior walls of buildings and warehouses.

SPECIFICATIONS

PRODUCT #	WATTAGES	DIMENSIONS (WxHxD)	LUMENS
ZL-WP-100-80-50-CCT-IP65	50/80/100W selectable	14.27" x 9.21" x 7.72"	6400/9920/12000

DIMENSIONS

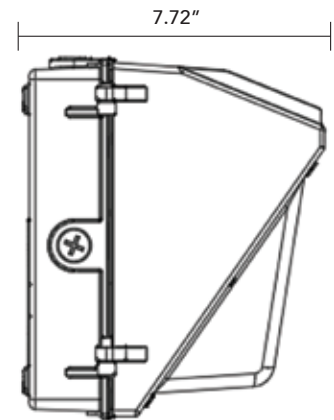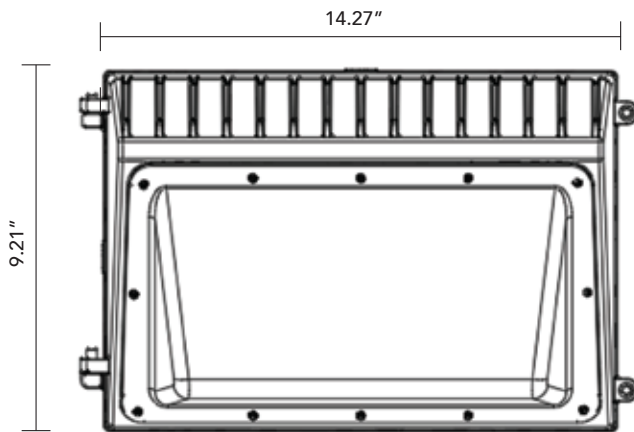

Specifications and actual product may vary.

Office (800) 679-9243 • sales@zledlighting.com • www.zledlighting.com

IP65




**WATTAGE
SELECTABLE**

**CCT
SELECTABLE**



LIGHT DISTRIBUTION

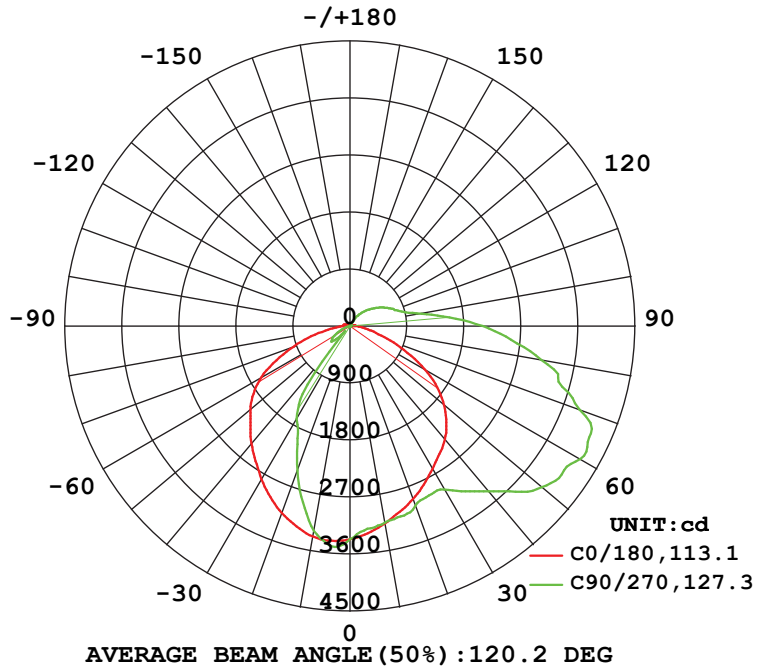

LUMENS

WATTAGE	COLOR TEMP	LUMENS
50W	30K	6400 lm
80W	30K	10240 lm
100W	30K	12800 lm
50W	40K	6200 lm
80W	40K	9920 lm
100W	40K	12400 lm
50W	50K	6000 lm
80W	50K	9600 lm
100W	50K	12000 lm

Specifications and actual product may vary.

Office (800) 679-9243 • sales@zledlighting.com • www.zledlighting.com