


COVERED CIRCLELINE FIXTURES

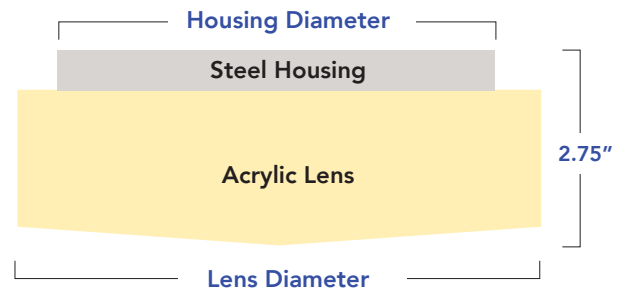

APPLICATION:

This economical surface mounted LED Circline unit is available in a white finish. This unit is for use in commercial and residential areas such as restrooms, closets, hallways, storage areas or any small room area where general lighting is desired.

CONSTRUCTION:

This unit is designed from heavy gauge die formed steel and is finished in baked white enamel or polyester powder coating for maximum durability and reflectivity.

MOUNTING:

Units are equipped with knockouts for junction box or direct surface mounting. Maximum weight 4 lbs/11", 9 lbs/14"

ELECTRICAL:

120VAC inpur. 80 LPW efficacy.
Dimmable with triac dimmer.
High power factor > 0.98

Part Number (Specify color)	Wattage	Housing Diameter	Lens Diameter	Lumens	Available Color Temperatures
ZL-BUT-22-12W-(Color)	12W	10.125"	11"	800	3000K
ZL-BUT-22-15W-(Color)	15W	10.125"	11"	1200	4000K
ZL-BUT-22-22W-(Color)	22W	10.125"	11"	1800	5000K
ZL-BUT-32-12W-(Color)	12W	12.75"	14"	800	3000K
ZL-BUT-32-15W-(Color)	15W	12.75"	14"	1200	4000K
ZL-BUT-32-22W-(Color)	22W	12.75"	14"	1800	5000K
ZL-BUT-54-12W-(Color)	12W	12.75"	14"	800	3000K
ZL-BUT-54-15W-(Color)	15W	12.75"	14"	1200	4000K
ZL-BUT-54-22W-(Color)	22W	12.75"	14"	1800	5000K
ZL-BUT-40-12W-(Color)	12W	17"	19"	800	3000K
ZL-BUT-40-15W-(Color)	15W	17"	19"	1200	4000K
ZL-BUT-40-22W-(Color)	22W	17"	19"	1800	5000K
ZL-BUT-72-12W-(Color)	12W	17"	19"	800	3000K
ZL-BUT-72-15W-(Color)	15W	17"	19"	1200	4000K
ZL-BUT-72-22W-(Color)	22W	17"	19"	1800	5000K