

LED FLOOD LIGHT - WATTAGE AND CCT SELECTABLE - MK SERIES



MOUNTING OPTIONS:




**WATTAGE
SELECTABLE**

**CCT
SELECTABLE**




PRODUCT FEATURES	
WATTAGE	150W, 120W, 100W selectable 200W, 180W, 160W selectable
COLOR TEMP	30K, 40K, 50K selectable
INPUT VOLTAGE	120-277VAC
EFFICACY (+/- 10%)	140 lm/W
CRI	>80
BEAM ANGLE	110 degrees
LED LIFESPAN (L70)	50,000 hours
RATED	IP65
LISTED	UL
WARRANTY	5 years

WATTAGE SELECTABLE


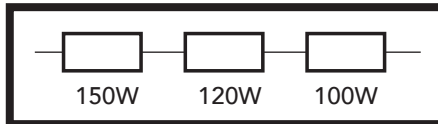


150, 120, 100W selectable

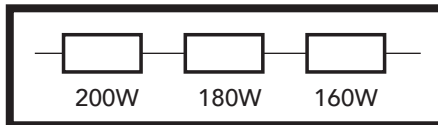


200, 180, 160W selectable

COLOR TEMP SELECTABLE

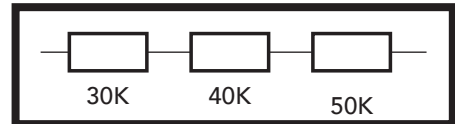

30, 40, 50K selectable

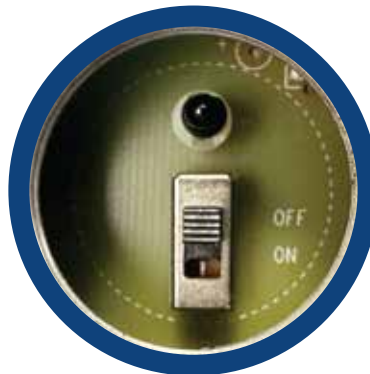

Photocontrol Selector

On = Dusk to Dawn
Off = Disabled



Wattage and CCT Selector

Specifications and actual product may vary.


Office (800) 679-9243 • sales@zledlighting.com • www.zledlighting.com

v07.24

LED FLOOD LIGHT - WATTAGE AND CCT SELECTABLE - MK SERIES

PRODUCT BUILDER

ex: ZL-FL-200-180-160-CCT/W-IP65-MK

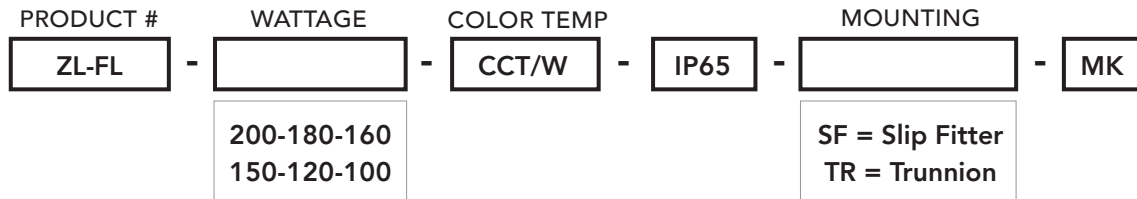


APPLICATIONS



- Manufacturing and construction sites
- Facades
- Buildings
- Signage
- Monuments

DIMENSIONS

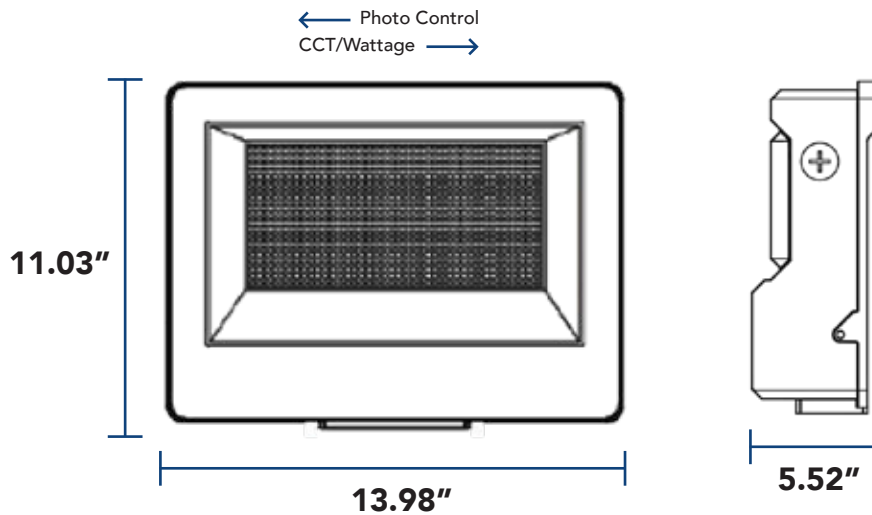

LUMENS


	150W	120W	100W		200W	180W	160W
30K	19,500	15,600	13,000	30K	26,000	23,400	20,000
40K	22,500	18,000	15,000	40K	30,000	27,000	24,000
50K	21,000	16,800	14,000	50K	28,000	24,000	22,400

LED FLOOD LIGHT - WATTAGE AND CCT SELECTABLE - MK SERIES

CHOICE OF MOUNTING OPTION INCLUDED



ZL-FL-MOUNT-SF-MK

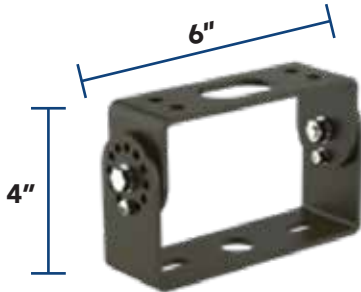

ZL-FL-MOUNT-TR-MK

