


RGBW LED CORN LAMP

APPLICATIONS

- Post-top
- Wall Pack
- Area Light

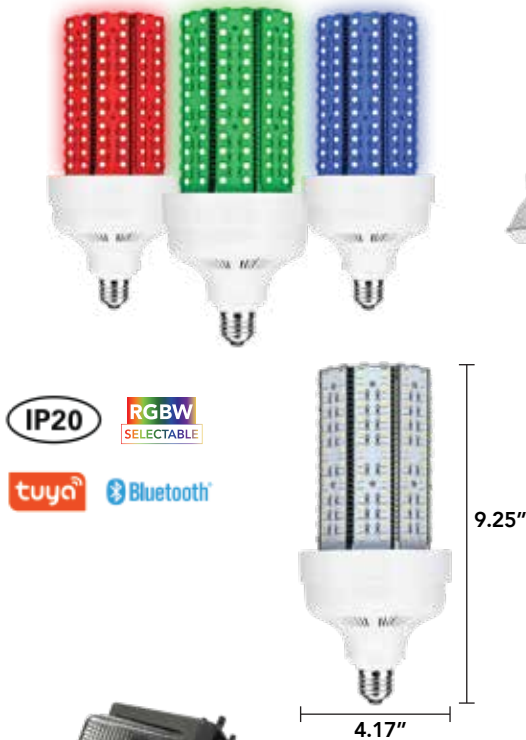

PRODUCT SPECIFICATIONS

WATTAGE	72W
COLOR TEMPERATURE (SELECTABLE)	40K White, Red, Green, Blue 50K White, Red, Green, Blue
INPUT VOLTAGE	120/277V
EFFICACY	Red- 56 lm/W; Green- 127 lm/W; Blue- 11 lm/W W-40K- 79; W-50K- 75
NANOMETERS	Red- 625nm; Green- 520nm; Blue- 450nm
OPERATING TEMP	-40° to 50° C; -40° to 121°F
CRI	80
BASE TYPE	E26 medium, E39 adapter included
LED LIFESPAN (L70)	50,000 hours
RATED	IP20
WARRANTY	5 year
REMOTE	Included
BLUETOOTH READY	TuyaSmart - See app for compatibility and fees.
DIMENSIONS	4.17" x 9.25"
PART NUMBERS	C-E26-72W-RGBW40K-120/277V
	C-E26-72W-RGBW50K-120/277V

NOTE: Adapter 8 Mogul Ring will be provided in each box for use in E39 Mogul base fixtures. Adapter does not add any additional length.

NOTE: Suitable for use in totally enclosed fixtures




RGBW LED CORN LAMP

BLUETOOTH + REMOTE

Disclaimer: Please check app compatibility with your device before downloading. Features and availability may vary by device or operating system. Subscription rates apply and may vary based on plan selection and region. Additional terms and conditions may apply.

2.4G Beacon



Controller

Instructions for Remote Control: The remote has 12 buttons



-   In the energized state, press to close and open the controller.
-   Press this button in the dynamic mode and static mode, Color brightness plus or minus.
-   RGB color switching in static mode.
-  Remove control network configuration button.
-  Return to static mode button.
-  White light
-  Dynamic mode button
-  Sleep mode
-  Shut down after 3 minutes

Controller Distribution Network

Turn the machine on and off 5 times. When it enters the breathing state, press and hold the button for 5 seconds to enter the remote controller network configuration state.




RGBW LED CORN LAMP

APP (TUYASMART) CONNECTION INSTRUCTIONS




App Distribution Network



1. Open the Tuya Smart App, turn the device on and off 5 times, and when it enters the breathing state, the App will automatically pop up the connection and enter the App network configuration state. After the network configuration is successful, click Finish.

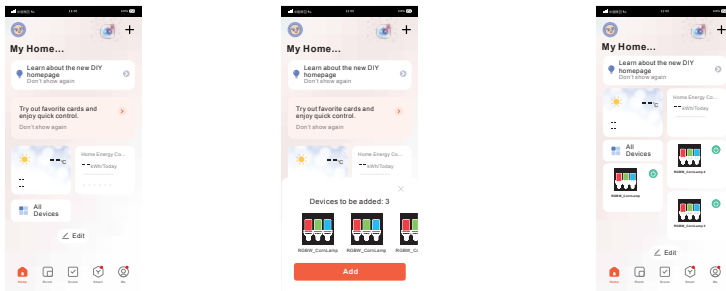

2. Select any device and click the three dots in the upper right corner to create a group.

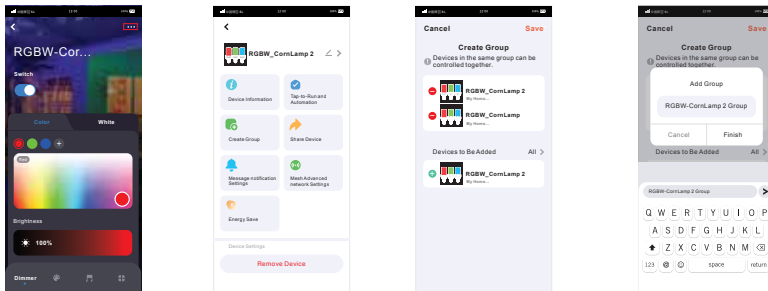


Open the App (Tuya Smart) Operation instructions for scene mode:

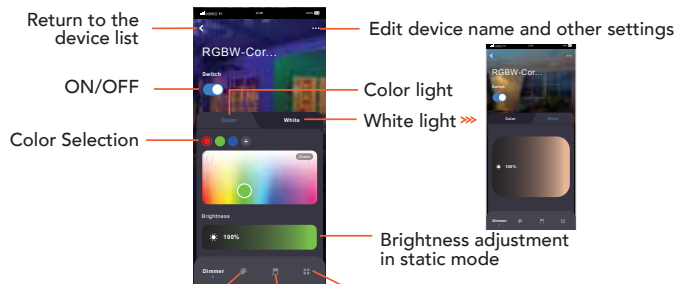

Scene Mode



Music Mode



More

