ZLED LIGHTING
ZLEDLIGHTING.COM

JOB / PROJECT NAME _____ DATE _____

PRODUCT MODEL # _____ QUANTITY _____

LED LINEAR HIGH BAY – MK SERIES





PRODUCT SPECIFICATIONS

WATTAGES	**1x2-** 80W, 160W **1x4-** 260W
COLOR TEMPERATURE	50K
EFFICACY	150 lm/W
LUMENS	**80W** - 12,000; **160W** - 24,000; **260W** - 39,000
INPUT VOLTAGE	120/277V
CRI	>80
DIMMING	0-10V
OPERATING TEMPERATURE	-20° to 40°C; -4° to 104°F
AIRCRAFT CABLE	6.56 feet (standard)
DIMENSIONS	**1x2-** 12.50" x 23.75" x 2.875" **1x4-** 12.50" x 45.75" x 2.875"
LENS	Frosted
REMOTE	Optional Sold Separately
OPTIONAL SENSOR	90° Arm Microwave Sensor
EMERGENCY BATTERY	Optional
COMPLIANCE	TAA
RATED	IP20
LISTED	ETL
WARRANTY	5 year



APPLICATIONS

- Warehouses
- Factories
- Gymnasiums
- Exhibition halls

PRODUCT BUILDER

ex: ZL-HB-1X2-80W-50K-120/277V-MS-MK

TYPE	SIZE	WATTAGE	COLOR TEMP	INPUT VOLTAGE	OPTIONS	SERIES
ZL-HB			50K	120/277V		MK
	1x2 **1x4**	1x2 **80W** **160W** 1x4 **260W**	**50K**=5000K		**MV=** Microwave Sensor **EM-25=** Emergency Battery **Blank=**None	

ZLED LIGHTING
ZLEDLIGHTING.COM


JOB / PROJECT NAME _____ DATE _____

PRODUCT MODEL # _____ QUANTITY _____


LED LINEAR HIGH BAY – MK SERIES

DIMENSIONS

(1x2 version)

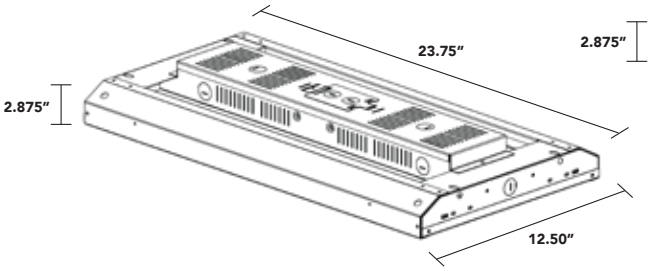

(1x4 version)

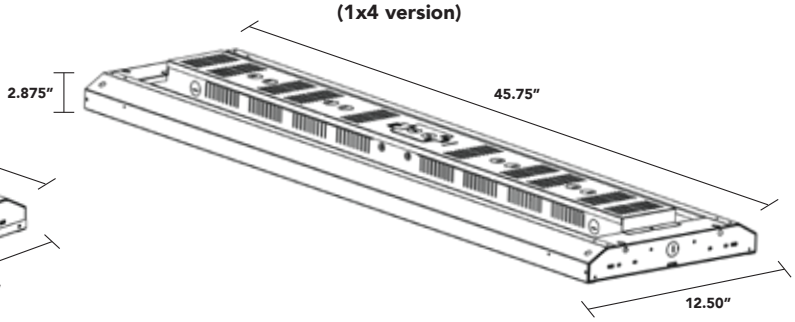

OPTIONS

EMERGENCY BATTERY BACKUP



- **Optional Part Builder Number:** EM-25
- **If ordering separately, use Part Number:** BL-EMRG-FXT-25D-A
- **MODEL:** 25W
- **INPUT VOLTAGE:** 100-347VAC
- **OUTPUT VOLTAGE:** 170VDC
- **EMERGENCY POWER:** 25W
- **EMERGENCY TIME:** 90 mins
- **DIMENSIONS:** 13.1" x 1.97" x 0.94"
- **AMBIENT TEMPERATURE:** 32-122F
- **BATTERY:** Lithium
- **WARRANTY:** 5 year


MICROWAVE SENSOR, 3PIN STYLE WITH 90° ANGLE



Optional Part Builder Part Number: MV

Part Number with 90° Angle:
ZL-MV-SENSOR-HB-ARM-HD07R

UL LISTED IP65

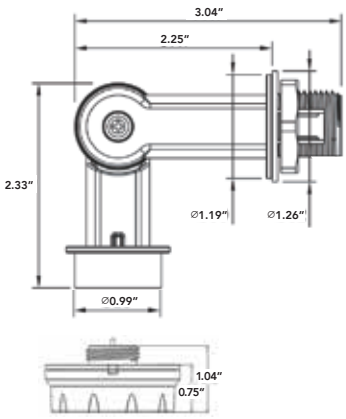



Part Number Remote Control:
ZL-REMOTE-HD05R
(Sold Separately)

SPECIFICATIONS

Power Supply	10-15VDC, <30mA
Dim Control Output	DIM 0-10V
Mounting Height	12m/39ft Max.
Detection Distance	≥3m/9ft
Operating Temperature	-40°C-60°C
IP Rating	IP65

⚠ WARNING

1. The sensor should be installed by qualified electrician and ensure power is OFF before installation.
2. Please read the instruction carefully before using the product and keep it well for other users to read any time.
3. We reserve the right to modify any incorrect text, image and technical parameters.
4. Any unauthorized modification is forbidden. Otherwise all guarantees will be immediately invalid.
5. Product could be optimized without prior notice.