


LED EMERGENCY DRIVER - UFOs



- **PART NUMBER:** ZL-EMRG-BLD-RM-40D-YYY
- **INPUT VOLTAGE:** 100-347V
- **OUTPUT VOLTAGE:** 170VDC
- **INPUT POWER:** 15W
- **EMERGENCY TIME:** 90 minutes
- **CHARGING TIME:** 24 hours
- **BATTERY:** Li-ion battery
- **AMBIENT TEMPERATURE:** 5-50C; 41-122F
- **DIMENSIONS:** 10.75" x 5.60"
- **WARRANTY:** 5 years

DIMENSIONS

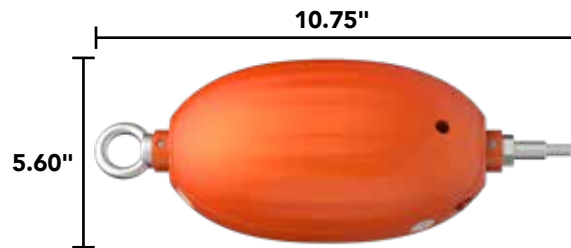

INSTRUCTIONS FOR REMOTE CONTROL

- Press the ON button to test emergency function.
This light will switch to its emergency lighting mode and the indicator light will turn off.
- Press the OFF button, the light will revert to normal lighting mode. When main power supply is off (emergency mode), press the off button to turn off emergency function.

TEST SWITCH & INDICATOR

RED ON: Charging mode

RED OFF: Discharging mode

Note: Remote controller must be pointed at the indicator light and be within 45 degree angle to receive signal.

Remote controller needs two AAA batteries to operate (not included in unit)

