


LED STRIP LIGHT - WATTAGE AND CCT SELECTABLE - MK SERIES



**Wattage Selectable up to 55W,
that's 7300 Lumens!**

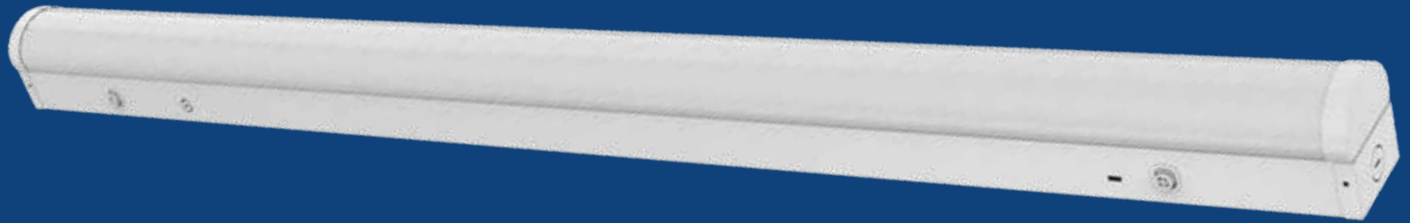

Shown with optional sensor.




**WATTAGE
SELECTABLE**

**CCT
SELECTABLE**




PRODUCT FEATURES	
WATTAGE	35W, 45W, 55W selectable
COLOR TEMP	35K, 40K, 50K selectable
INPUT VOLTAGE	120-277VAC
EFFICACY (+/- 10%)	130 lm/W
CRI	>80
BEAM ANGLE	120 degrees
AMBIENT TEMP	-20 to 40C; -4 to 104F
LED LIFESPAN (L70)	50,000 hours
RATED	IP20
LISTED	ETL
WARRANTY	5 years

WATTAGE SELECTABLE

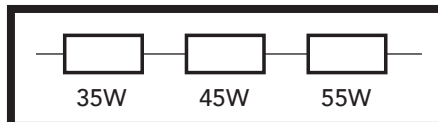

35, 45, 55W selectable

COLOR TEMP SELECTABLE

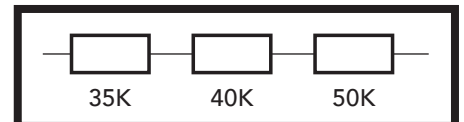

35, 40, 50K selectable

Optional bi-level sensor
activated by motion and/or
daylight contribution



Easy access to switches



LED STRIP - WATTAGE AND CCT SELECTABLE - MK SERIES

PRODUCT BUILDER

ex: ZL-4FT-STRIP-35-45-55W-CCT-120-277V-MK-MS


PRODUCT #	WATTAGE	COLOR TEMP	VOLTAGE	OPTION
ZL-4FT-STRIP	35-45-55W	CCT	120-277V	MK
				<p>MS = Factory installed Sensor</p> <p>(Blank) = No Sensor</p>

APPLICATIONS



- Warehouses
- Factories
- Offices
- Hotels
- Banks
- Rackings
- Under cabinets
- Surface mounts
- Retrofit fixtures
- Task lights
- Linear surface mount

DIMENSIONS - 4 ft. (standard)

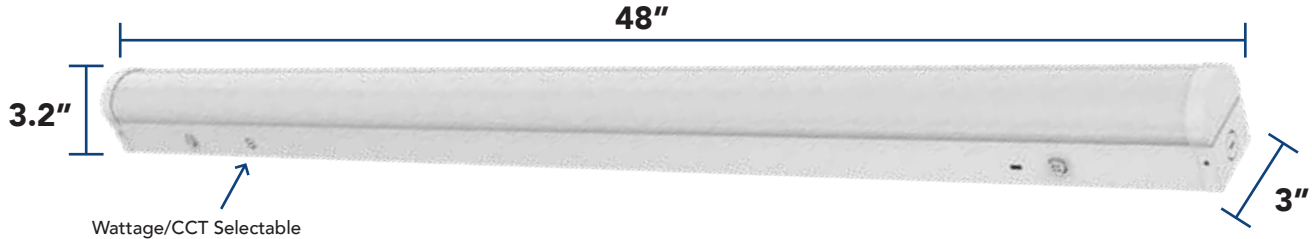


LUMENS


WATTAGE	COLOR TEMP	LUMENS
35W	35K	4498 lm
35W	40K	4773 lm
35W	50K	4747 lm
45W	35K	5732 lm
45W	40K	6099 lm
45W	50K	6065 lm
55W	35K	6933 lm
55W	40K	7430 lm
55W	50K	7398 lm

LED STRIP - WATTAGE AND CCT SELECTABLE - MK SERIES

LIGHT DISTRIBUTION

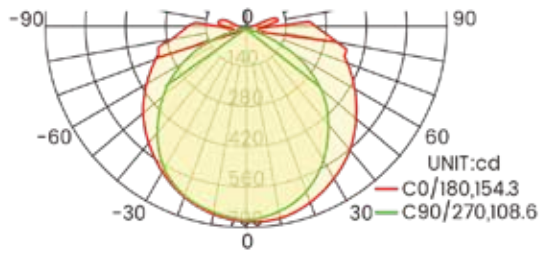

AVERAGE BEAM ANGLE (50%) : 131.4 DEG
2ft - 20W

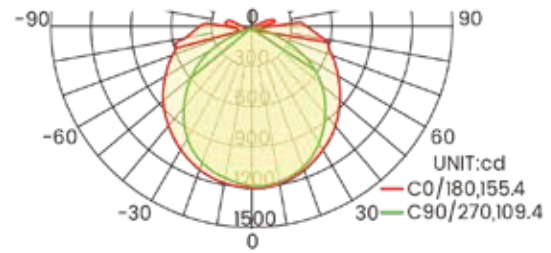

AVERAGE BEAM ANGLE (50%) : 132.4 DEG
4ft - 40W

OPTIONS



PART #

ZL-SENSOR-HB-HD07R



Remote

ZL-HAISEN-REMOTE-HD05R