

LANDSCAPE LED BULLET - 3 WATTAGE, 3 CCT SPOT LIGHT




APPLICATIONS

- Outdoor sport fields/courts
- School playgrounds
- Stadiums
- Warehouses
- Factories
- Highway toll stations
- Meeting rooms
- Exhibition hall
- Gymnasiums
- Supermarkets


PRODUCT SPECIFICATIONS

WATTAGES	30W/40W/50W selectable
COLOR TEMPS	30K/40K/50K selectable
EFFICACY	128 lm/W
LUMENS	30W- 3,840; 40W- 5,120; 50W- 6,400
INPUT VOLTAGE	120/277VAC
CRI	>80
BEAM ANGLE	38°
OPERATING TEMP	-40° to 113°F
MOUNT (INCLUDED)	Angle-adjustable Knuckle Bracket mount
DIMMING	0-10V
FIXTURE HOUSING	Heavy die-cast aluminum alloy housing with bronze powder-coated finish
LISTED	ETL
WARRANTY	5 year
PART NUMBER	ZL-BFL-50/40/30W-3CCT-SL

DIMENSIONS

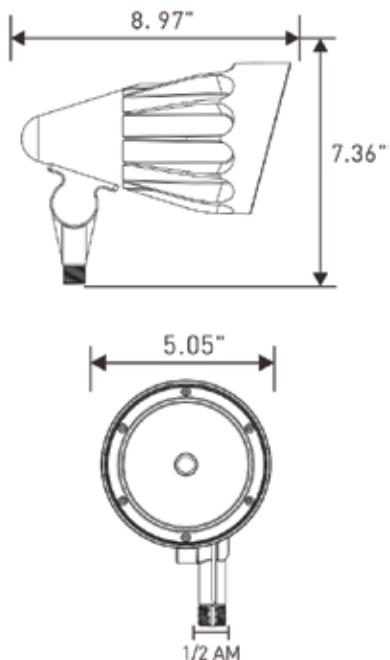

LIGHT DISTRIBUTION

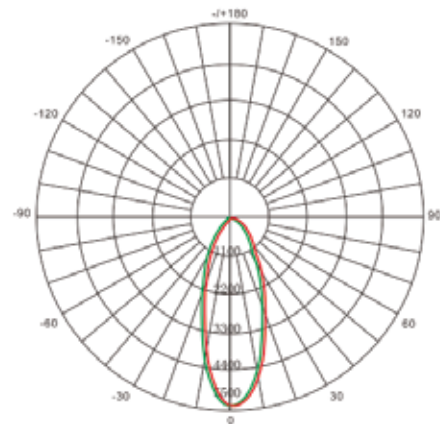

AVERAGE BEAM ANGLE[50%]: 38°

UNIT: CD

— C0/180, 37.5°

— C30/210, 40°

— C60/240, 36°

— C90/270, 38.5°

Lumens: 6400 LM
Test Number: 50W
Test Number: 5000K



LANDSCAPE LED BULLET - 3 WATTAGE, 3 CCT SPOT LIGHT


WIRING DIAGRAM

CAUTION:

1. Do not test the LED light with an electric generator.
2. Please comply with the relevant national, regional and local laws and regulations when installing this fixture.
3. To avoid electric shock and product damage, do not install the lights on rainy days.
4. Please turn off the power supply prior to installation or maintenance. Proper grounding is required to ensure operational safety.


NOTICE:

1. To prevent electric shock or fire hazards, installation must be performed by personnel with professional electrical expertise.
2. Please wear protective gloves prior to installation to avoid personal injury.
3. If smoke, wire overheating or fire occurs during or after installation, turn off the power supply immediately and contact qualified professionals for inspection and repair.
4. This luminaire is designed for outdoor installation use.

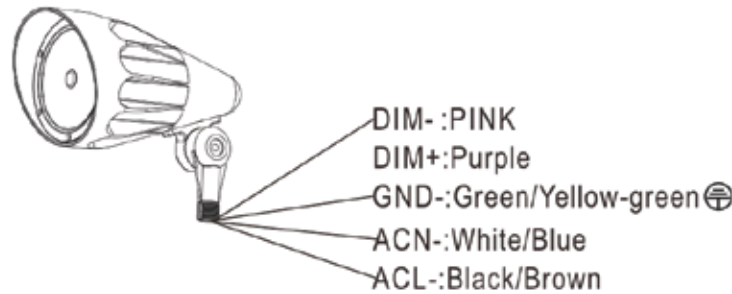


1/2 ADJUSTABLE FITTER MOUNTING

- Step 1: Take the light out of the package (see Figure 1).
- Step 2: Complete the wire connection following the correct wiring mode (pay close attention to the distinction of positive wire, negative wire, and ground wire), then thread the wires into the light pole (see Figure 2).
- Step 3: Loosen the fixing screws, adjust the fixture angle according to actual lighting needs, and then tighten the screws securely. Tip: The fixture angle is adjustable (see Figure 3).
- Step 4: Pass the bracket through the mounting surface, fix it firmly with screws, and then connect the wires in accordance with the specified wiring requirements (see Figure 4).
- Step 5: When mounting on a wall or ceiling with a canopy, seal the gap between the fitting and the mounting surface to ensure stability and waterproof performance (see Figure 5).




(Figure1)



(Figure2)



(Figure3)



(Figure4)



(Figure5)



LANDSCAPE LED BULLET - 3 WATTAGE, 3 CCT SPOT LIGHT

1/2 ADJUSTABLE FITTER MOUNTING


Step 1: Take the light out of the package (see Figure 6).

Step 2: Complete the wire connection following the correct wiring mode (pay close attention to the distinction of positive wire, negative wire, and ground wire), then thread the wires into the light pole (see Figure 7).


Step 3: Loosen the fixing screws, adjust the fixture angle according to actual lighting needs, and then tighten the screws securely.

Tip: The fixture angle is adjustable (see Figure 8).


Step 4: Pass the bracket through the mounting surface, fix it firmly with screws, and then connect the wires in accordance with the specified wiring requirements.



(Figure6)



(Figure7)




(Figure8)

FUNCTION ADJUSTMENT

Step 1: Open the plastic plug using a screwdriver (see Figure 9). Then slide the CCT adjustment switch left or right to set the desired color temperature (see Figure 10). Once the preferred color temperature is adjusted, MUST tighten the plastic plug securely to seal it (see Figure 11).



(Figure9)



(Figure10)



(Figure11)

