

ADJUSTABLE LED WALL PACK - WATTAGE AND CCT SELECTABLE



PRODUCT FEATURES

| | |
|----------------|---|
| WATTAGE | 15/25/30/40W selectable |
| COLOR TEMP | 30/40/50K selectable |
| INPUT VOLTAGE | AC120/277V |
| EFFICACY | 150 lm/W |
| LENS | Type III |
| LIFESPAN (L70) | 50,000 hours |
| CRI | >80 |
| OPERATING TEMP | -40°F to 122°F |
| HOUSING | Die-cast aluminum |
| FINISH | Bronze |
| MOUNTING | Wall Mount, Four 1/2" knockouts for convenient installation |
| LENS MATERIAL | Polycarbonate |
| PHOTOCELL | Built in |
| LISTED | UL |
| RATED | IP65 |
| WARRANTY | 5 year |

APPLICATIONS

- Alleys
- Pathways
- Landscape lighting
- Outdoor commercial/residential



IP65


WATTAGE
SELECTABLE

CCT
SELECTABLE

SPECIFICATIONS

| PRODUCT # | DIMENSIONS | LUMENS (+10%) |
|-------------------------------------|----------------------|--|
| ZL-WP-ADJ-40-30-25-15W-3CCT-IP65-ZR | 8.36" x 7.72" x 5.8" | 15W - 2250, 20W - 3750, 30W - 4500, 40W - 6000 |

DIMENSIONS

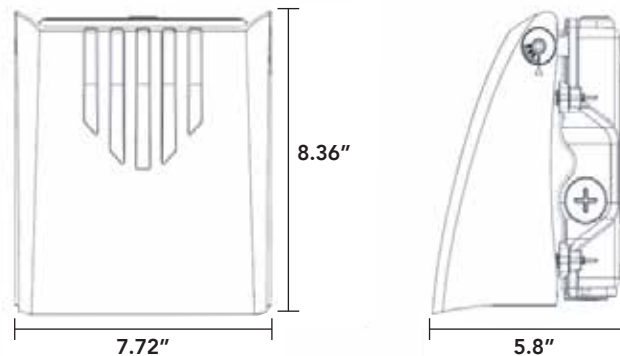

ADJUSTABLE LED WALL PACK - WATTAGE AND CCT SELECTABLE



BEAM ANGLE

