


BACKLIT FLAT PANEL – WATTAGE AND CCT SELECTABLE – DM SERIES



PRODUCT SPECIFICATIONS

WATTAGES	2x2'- 20W, 25W, 30W, 35W, 40W selectable 2x4'- 25W, 30W, 35W, 40W, 50W selectable
COLOR TEMPS	30K, 35K, 40K, 50K selectable
EFFICACY	130 lm/W
LUMENS	20W- 2,600; 25W- 3,250 30W- 3,900; 35W- 4,550 40W- 5,200; 50W- 6,500
INPUT VOLTAGE	AC120/277V
CRI	>80
EMERGENCY BATTERY	Optional
DIMENSIONS	2x2'- 24" x 24" x 1.38" 2x4'- 48" x 24" x 1.38"
LISTED	ETL
WARRANTY	5 year

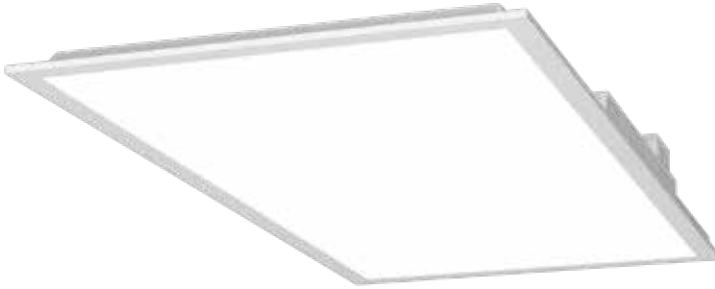

APPLICATIONS

- Office
- Hospital
- School
- Library



PRODUCT BUILDER

ex. ZL-FP-PA-CCT-2X2-DM

PRODUCT #	COLOR TEMP	SIZE	DM	OPTIONS
ZL-FP-PA	CCT	2x2 2x4	DM	Blank = None EM = Emergency Battery Back-Up

ACCESSORIES



Emergency Battery – OPTIONAL PART #: EM

- UL listed approved
- Output current and voltage: 410-800mA 25V 48V
- Charging time: 24 hours
- Emergency power: 8W
- Illumination time: 90 minutes
- Slim design, easy to install



Surface Mounted Kit – PART #: ZL-FP-2x2-SMKIT-MK ZL-FP-2x4-SMKIT-MK

- Perfect for panel light
- Available in 2x2 ft, 2x4 ft
- High quality aluminum material with white coating, corrosion and oxidation resistance



Suspension Kit – PART #: ZL-FP-2x2-PMKIT-MK ZL-FP-2x4-PMKIT-MK



- For suspending the panel light
- Material: stainless steel

BACKLIT FLAT PANEL – WATTAGE AND CCT SELECTABLE – DM SERIES

PHOTOMETRICS



ZL-FP-PA-CCT-2X2-DM

Wattage	20, 25, 30, 35, 40W selectable
PF	0.91
CRI	84
R9	11
Flux	5704 lm
Efficacy (AC)	143.8 lm/W
CCT	30, 35, 40, 50K selectable
Voltage Range	120-277V
Operating Temp	86 - 266° F

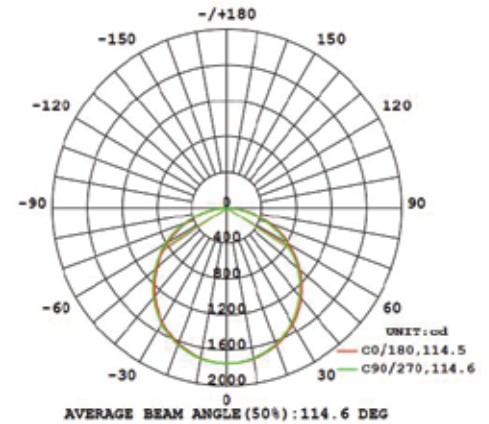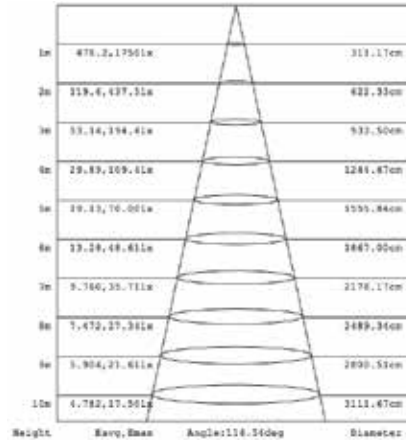

ZL-FP-PA-CCT-2X4-DM


Wattage	25, 30, 35, 40, 50W selectable
PF	0.944
CRI	84
R9	11
Flux	7132 lm
Efficacy (AC)	144.3 lm/W
CCT	30, 35, 40, 50K selectable
Voltage Range	120-277V
Operating Temp	86 - 266° F

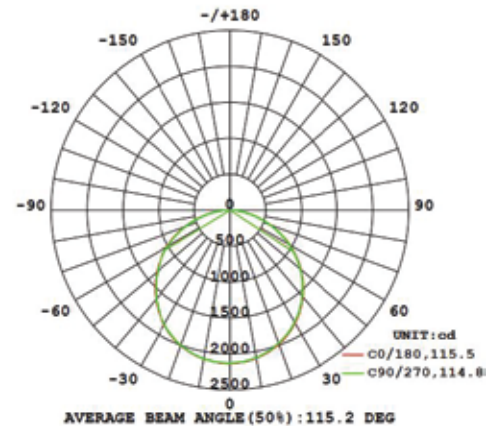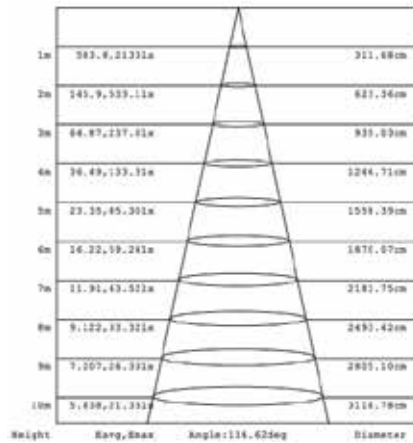

BACKLIT FLAT PANEL – WATTAGE AND CCT SELECTABLE – DM SERIES


INSTALLATION

Recessed

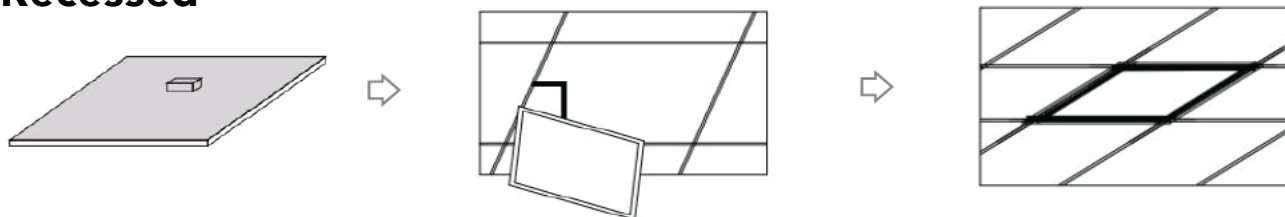


Suspended


Step 1: Fix the suspension wire fixer on the ceiling.

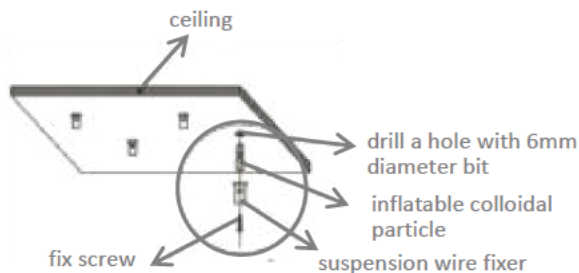

Step 2: Fix the suspension wire on the ceiling.

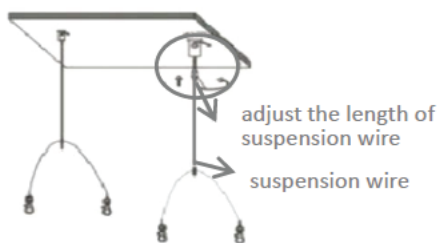

Step 3: Connect LED panel light by the hook of suspension wire.

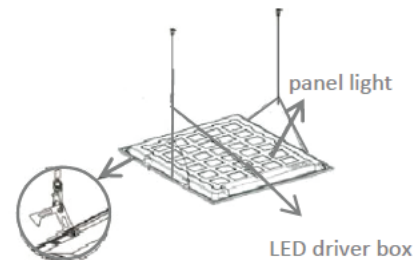


Surface Mounted


Step 1: Surface mounted kits.




Step 2: Assembly the frame.

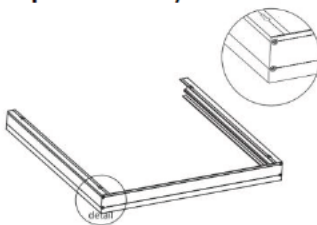


Step 3: Fix the frame on ceiling.

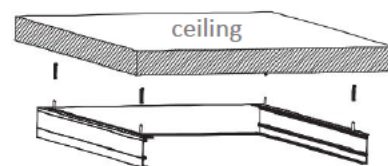

Step 4: Insert LED panel to the frame.

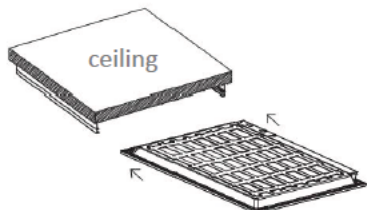

Step 5: Fix "L" bracket to frame.

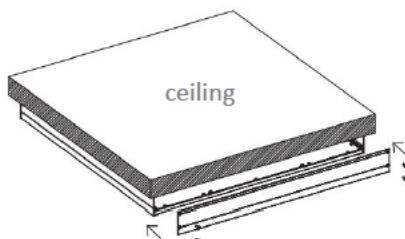

Step 6: Installation is complete.

