

AREA LIGHT – WATTAGE AND CCT SELECTABLE – MK SERIES



APPLICATIONS

- Entryways
- Athletic facilities
- Shopping areas
- Parking lots and structures
- Storage areas
- Walkways



PRODUCT SPECIFICATIONS

WATTAGES	100W, 150W, 200W selectable 250W, 280W, 320W selectable
COLOR TEMPS	30K, 40K, 50K selectable
EFFICACY	30K- 130 lm/W; 40K- 150 lm/W; 50K- 140 lm/W
LUMENS @ 40K	100/150/200W- 28,937 250/280/320W- 47,120
INPUT VOLTAGE	120/277VAC
CRI	>70
DIMMING	0-10V
LED LIFESPAN (L70)	50,000 hours
DIMENSIONS	100/150/200W- 18.9" x 12" x 2.9" 250/280/320W- 22" x 14.3" x 2.9"
WORKING TEMP	-4 to 104F
MOUNTING - CHOICE OF ONE INCLUDED	Slip Fitter Universal Direct Trunion
LENS OPTIONS	T3=IES Type III (Standard) T4=IES Type IV T5=IES Type V
RATED	IP65
LISTED	UL
WARRANTY	5 year

PRODUCT BUILDER


ex: ZL-AREA-100-150-200-CCT-120/277V-PC-BR-A-MK

PRODUCT #	WATTAGE	COLOR TEMP	VOLTAGE	PHOTO CONTROL	COLOR	DISTRIBUTION TYPE	MOUNTING	SERIES
ZL-AREA		CCT	120/277V		BR			MK
	100-150-200 250-280-320			SC=Shorting cap included PC=Photocontrol included		T3=IES Type III (Standard) T4=IES Type IV T5=IES Type V	A=Slip Fitter B=Universal Direct C=Trunion	

AREA LIGHT – WATTAGE AND CCT SELECTABLE – MK SERIES

DIMENSIONS

100/150/200W: 2.9"
250/280/320W: 2.9"

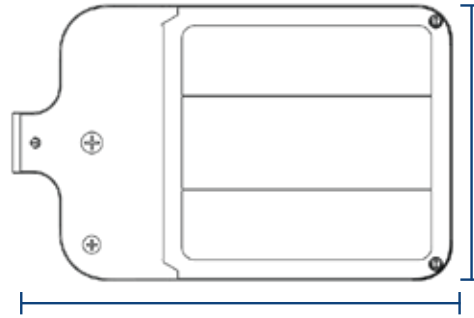

100/150/200W: 18.9"
250/280/320W: 22"

100/150/200W: 12"
250/280/320W: 14.3"

OPTIONS



A

Slip Fitter Mount

ZL-BRACKET-TYPE-A-MK



B

Universal Direct Mount

ZL-BRACKET-TYPE-B-MK

Compatible with round
or square poles



C

Trunion Mount

ZL-BRACKET-TYPE-C-MK



Shorting Cap

ZL-SC




Photocell

ZL-PC

AVAILABLE OPTICS




Standard/Included



TYPE III


Optional




TYPE IV




TYPE V



TYPE III



TYPE IV



TYPE V

Delivery
30-45 days