

RGBW LED PENDANT MOUNT DOWNLIGHT



APPLICATIONS

- Churches
- Theaters
- Auditoriums
- Exhibition & event halls
- Banquet halls
- Restaurants
- Bars
- Cafés
- Showrooms
- Museums

PRODUCT SPECIFICATIONS

WATTAGES	10W, 15W, 20W, 30W, 40W, 50W, 60W, 80W, 100W, 120W, 150W
COLOR TEMPS	RGBW(W)- 4in1 RGBW Choice of - W=White 27K, 30K, 40K, 50K, 60K
LUMENS	10W- 450-550; 15W- 675-825; 20W- 900-1100; 30W- 1350-1650; 40W- 1800-2200; 50W- 2250-2750; 60W- 2700-3300; 80W- 3600-4400; 100W- 4500-5500; 120W- 5400-6600; 150W- 6750-8250
INPUT VOLTAGE	120/277V / DC24V
CRI	Minimum 80
BEAM ANGLE	65°- 10W, 15W, 20W, 30W, 40W, 50W, 60W 40°- 80W, 100W, 120W, 150W
OPERATING TEMP	-20° to 40°C; -4° to 104°F
LED LIFESPAN (L70)	50,000 hours
CONTROLS	DMX512 control or RF/WIFI Wireless Control
DIMENSIONS (ØxH)	10W- 3.15" x 3.55"; 15W- 3.94" x 3.94"; 20W- 5.12" x 5.12"; 30W- 5.91" x 5.52"; 40W- 6.7" x 6.3"; 50W+60W- 7.88" x 7.49"; 80W- 8.67" x 9.06"; 100W+120W+150W- 8.67" x 11.03";
WEIGHT (LBS)	10W- 3.97; 15W- 5.29; 20W- 5.95; 30W- 6.83; 40W- 7.72; 50W- 9.7; 60W- 9.92; 80W- 13.01; 100W- 15.21; 120W- 15.87; 150W- 16.53
RATED	IP20
LISTED	ETL
WARRANTY	5 year




RGBW LED PENDANT MOUNT DOWNLIGHT

PRODUCT BUILDER

ex: ZL-RGBWPDL-10W-30K-BL-65-1-TR


TYPE	WATTAGE/FIXTURE SIZE	COLOR TEMP	BODY COLOR	OPTICS	INPUT VOLTAGE	SERIES
ZL-RGBWPL	10=10W-3.15" x 3.55" 15=15W-3.94" x 3.94" 20=20W-5.12" x 5.12" 30=30W-5.91" x 5.52" 40=40W-6.7" x 6.3" 50=50W-7.88" x 7.49" 60=60W-7.88" x 7.49" 80=80W-8.67" x 9.06" 100=100W-8.67" x 11.03" 120=120W-8.67" x 11.03" 150=150W-8.67" x 11.03"	RGBW27=RGBW-4in1 W/2700K RGBW30=RGBW-4in1 W/3000K RGBW40=RGBW-4in1 W/4000K RGBW50=RGBW-4in1 W/5000K RGBW60=RGBW-4in1 W/6000K	BL=Black WH=White	65=65° (Standard) 10W+15W+20W+ 30W+40W+50W+ 60W 40=40° 80W+100W+ 120W+150W	1=120-277V 2=DC24V	TR

DIMENSIONS

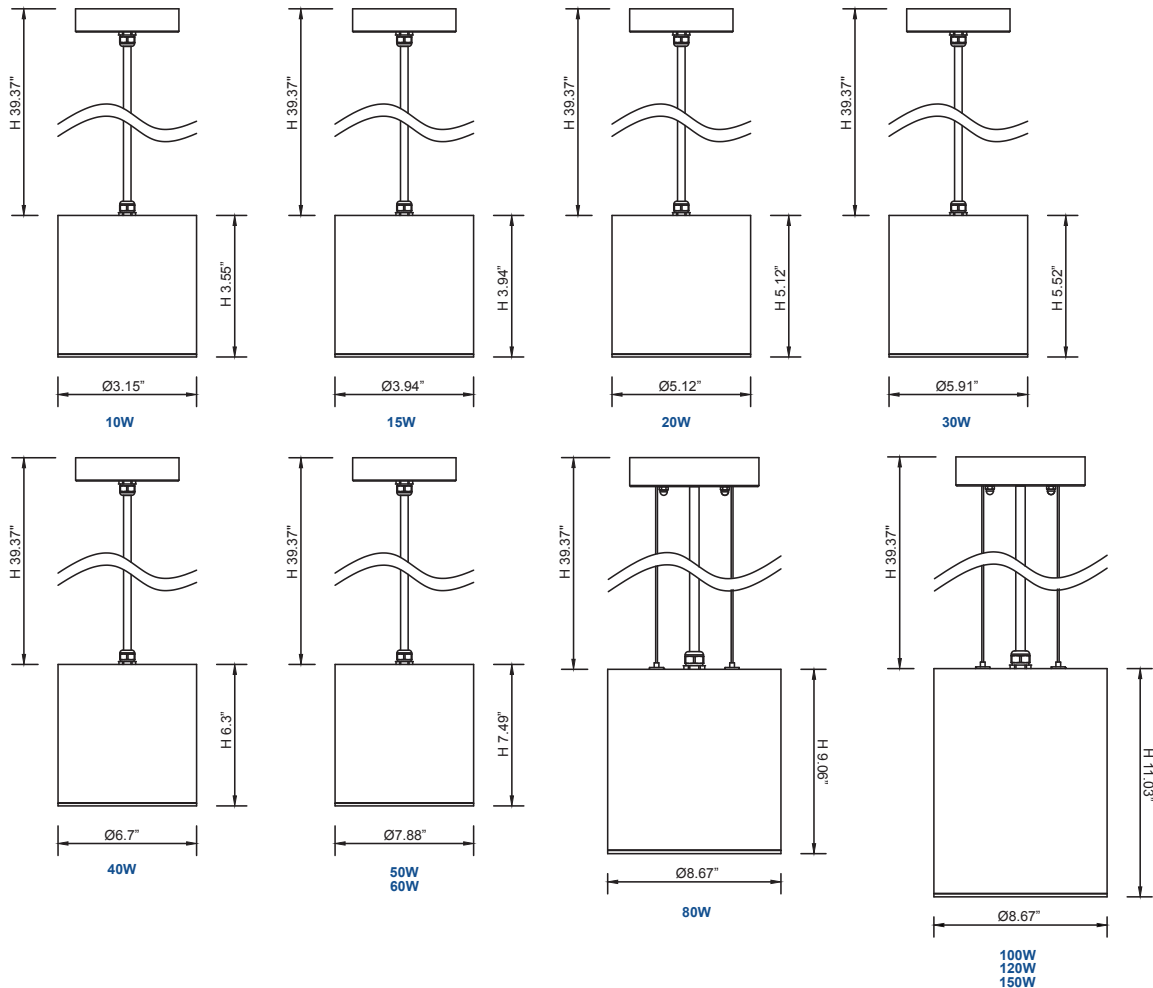


RGBW LED PENDANT MOUNT DOWNLIGHT

TYPICAL SYSTEM DIAGRAM

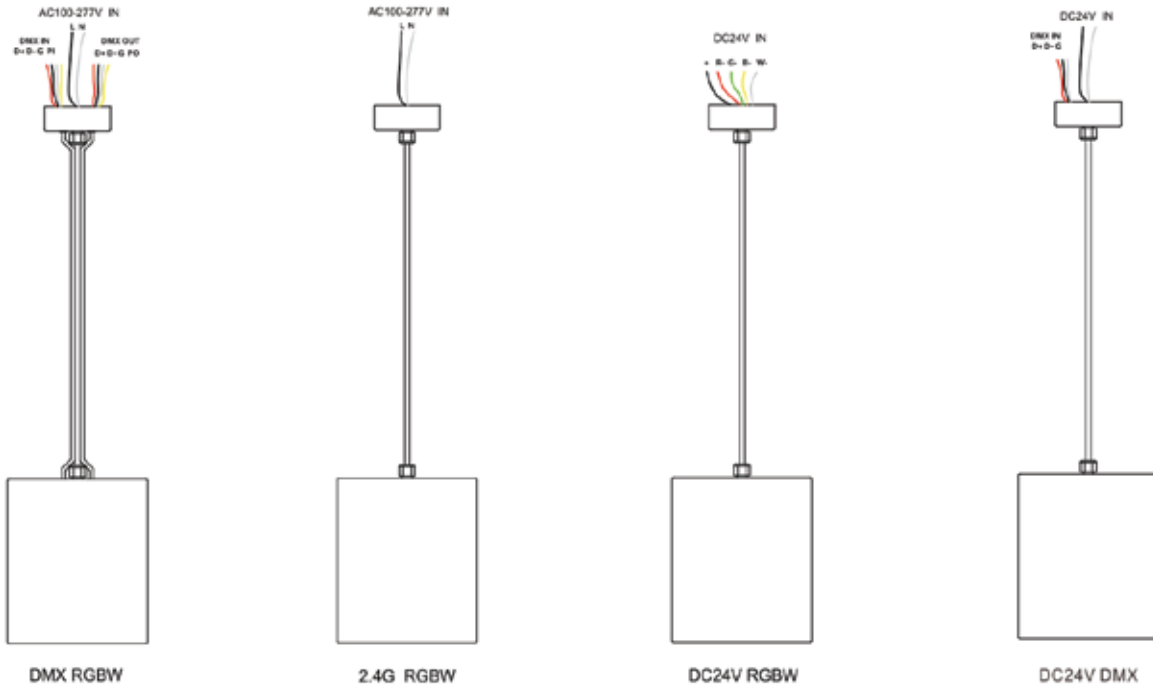

WIRING DIAGRAM

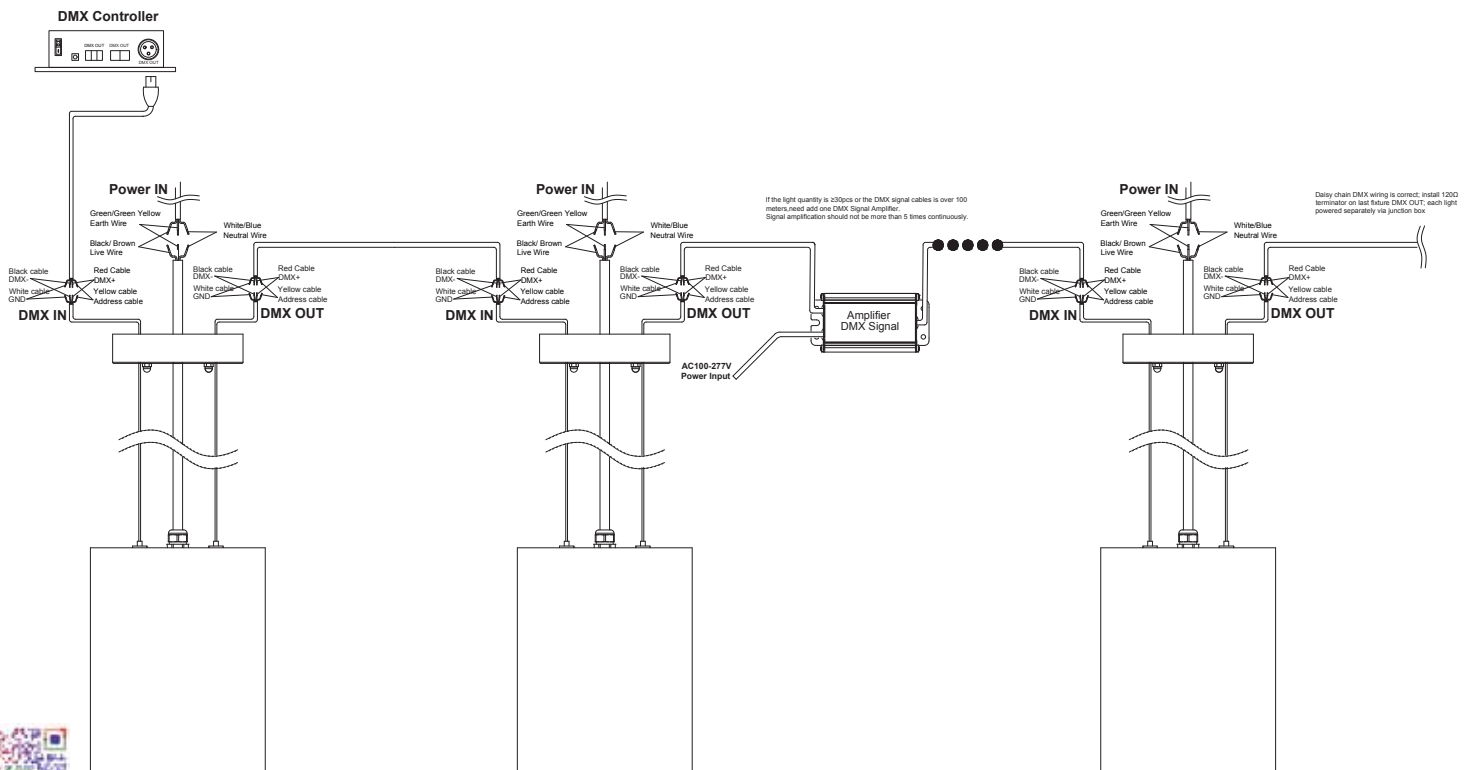


RGBW LED PENDANT MOUNT DOWNLIGHT


INSTALLATION INSTRUCTIONS - PENDANT

10W-60W

Step 1- Take out the mounting plate and assemble two M4 screws onto it. Then fix the mounting plate to the ceiling by tightening the two screws.

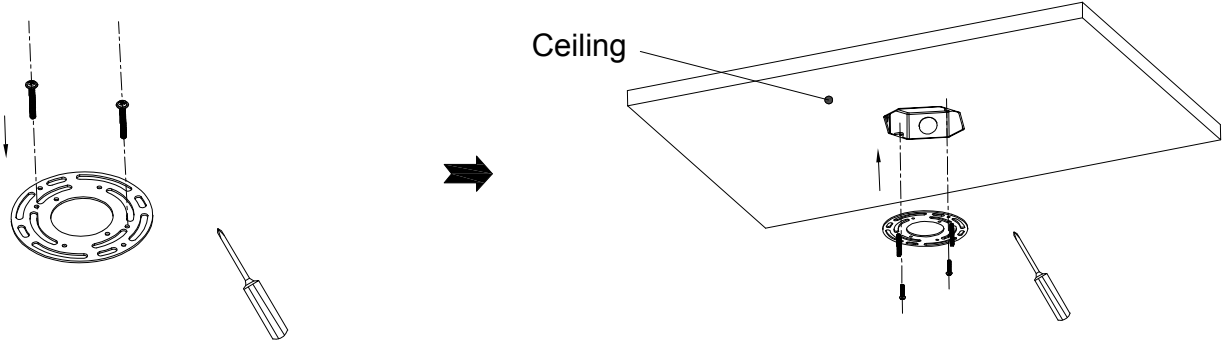

Step 2- Connect the power cord and put it into the junction box. Then fix the fixture ceiling cover to the ceiling by tightening two cap screws. At this time, the installation of the light fixture is complete.

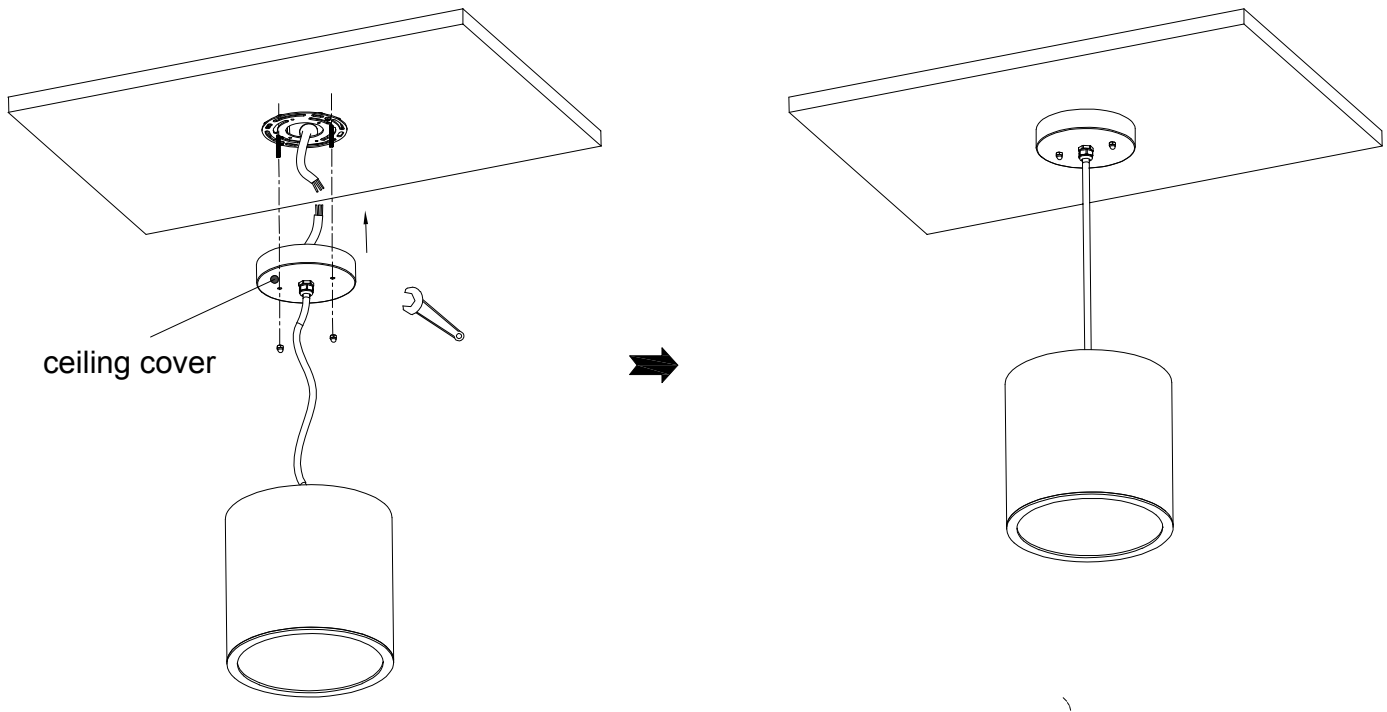

Remark-

1. The power must be turned off before installation.
2. Please have a professional electrician complete the installation of the light fixture.




RGBW LED PENDANT MOUNT DOWNLIGHT


INSTALLATION INSTRUCTIONS - PENDANT

80W-150W


Step 1- Drill 2 holes on the ceiling and insert the M8 expansion bolts into the wall. Then take out the hanging chain of the light fixture and fix it to the ceiling by tightening two nuts.

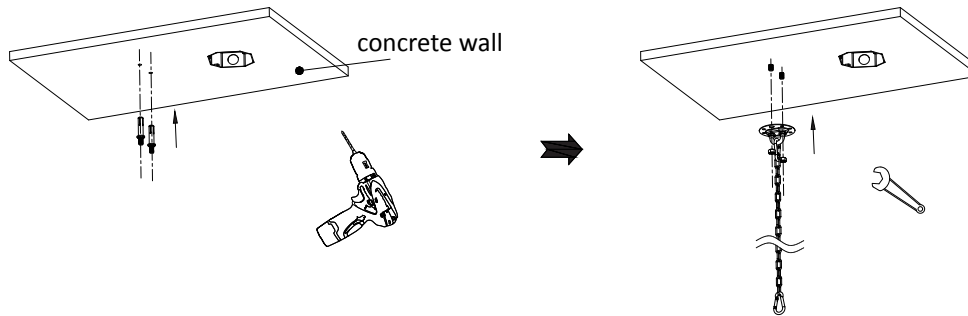

Step 2- Manually press the spring buckle on the hanging chain to hang the main body of the light fixture. Then fix the mounting plate to the ceiling by tightening the two screws. Please note that two M4 screw need to be pre-installed on the mounting plate.

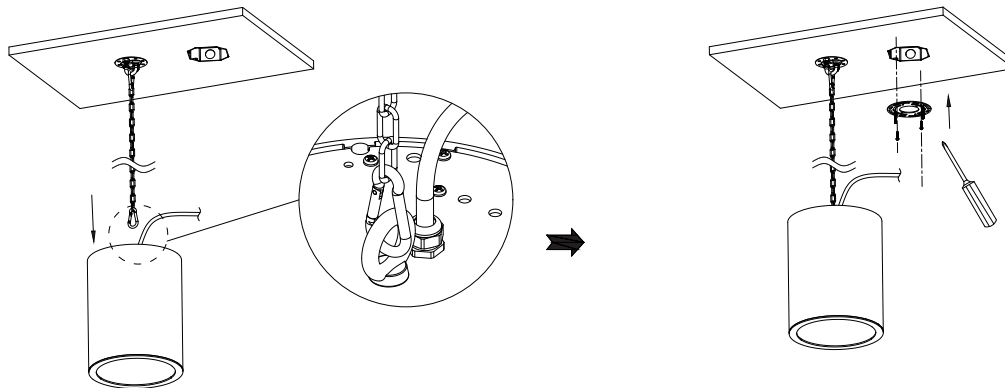

Step 3- Connect the power cord and put it into the junction box. Then fix the ceiling cover to the ceiling by tightening two cap screws. At this time, the installation of the light fixture is complete.

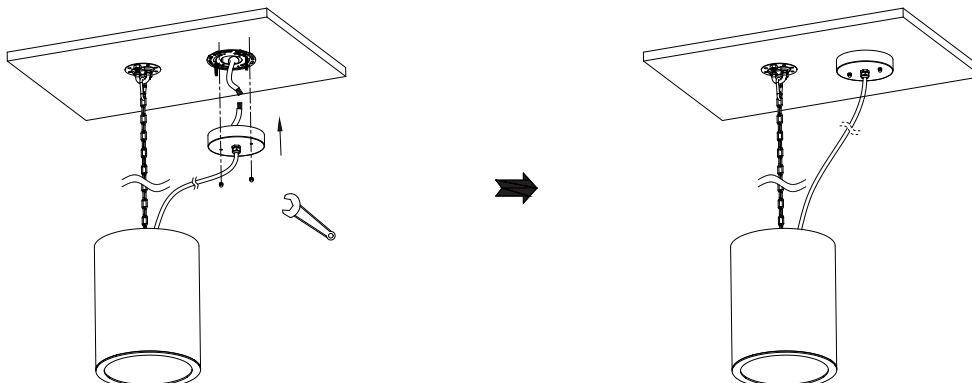

Remark-


1. The power must be turned off before installation.
2. Please have a professional electrician complete the installation of the light fixture.




RGBW LED PENDANT MOUNT DOWNLIGHT

INSTALLATION INSTRUCTIONS - CEILING

Step 1- First, remove the ceiling mounting plate of the downlight, then fix it to the Wood ceiling using four self-tapping screws.

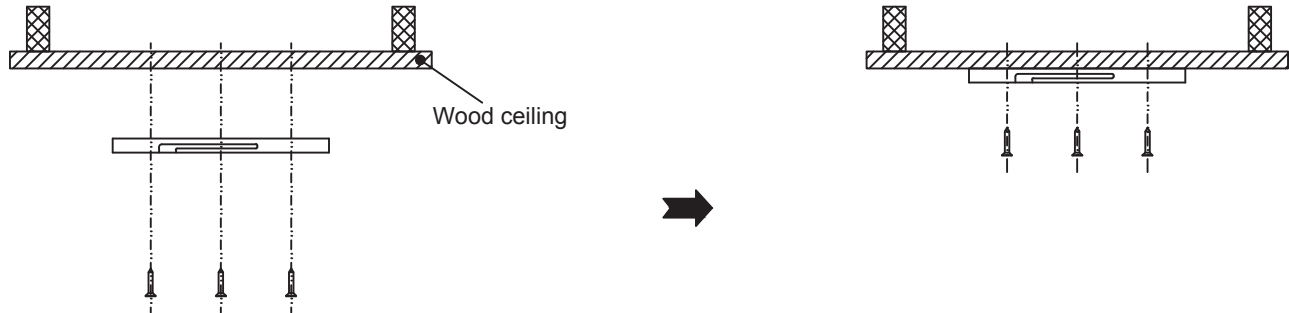

Step 2- Connect the lamp to the input cable, then rotate the lamp body upwards for installation, Now the installation of the downlights is complete.

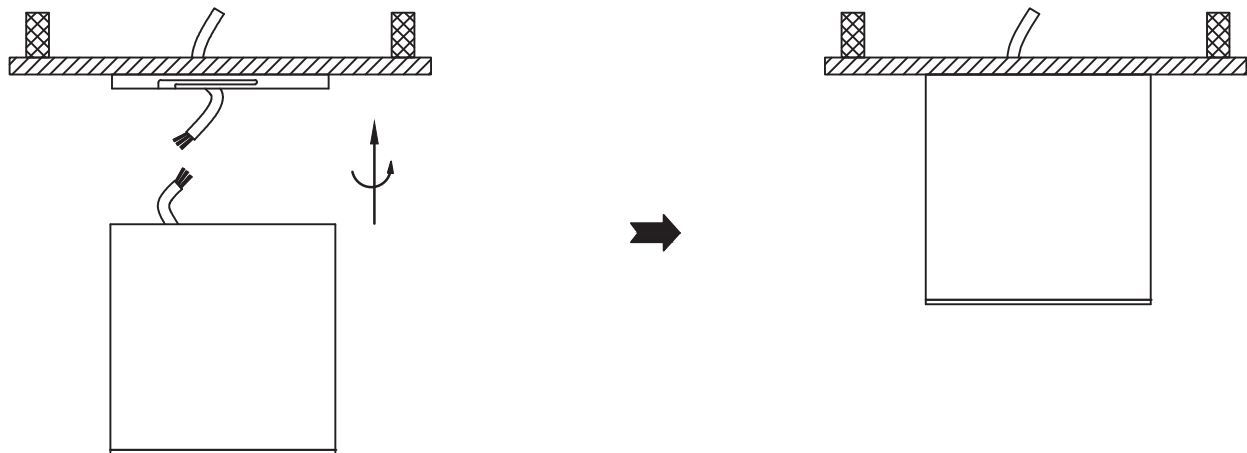

Remark-

* The main power switch must be turned off before installing the Lamp

