

LED STRIP LIGHT – WATTAGE AND CCT SELECTABLE – DM SERIES



Shown with optional sensor.



APPLICATIONS

- Corridor
- Office
- School
- Hospital
- Library
- Utility areas

PRODUCT SPECIFICATIONS

WATTAGES	4ft- 24W, 32W, 40W selectable 8ft- 64W, 75W, 90W selectable
COLOR TEMP	35K, 40K, 50K selectable
INPUT VOLTAGE	120/277VAC
EFFICACY	130 lm/W
LUMENS	24W- 3,120; 32W- 4,160 40W- 5,200; 64W- 8,320 75W- 9,750; 90W- 11,700
CRI	>80
DIMENSIONS	4ft- 48" x 2.9" x 3.27" 8ft- 92.7" x 2.9" x 3.27"
REMOTE	Sold Separately
SENSOR	Optional Microwave
EMERGENCY BATTERY	Optional (4' only)
LISTED	ETL
WARRANTY	5 year

PRODUCT BUILDER

ex: ZL-4FT-STRIP-24/32/40W-3CCT-120/277V-DM

TYPE	LENGTH	TYPE	WATTAGE	COLOR TEMP	INPUT VOLTAGE	SERIES	OPTIONS
ZL		STRIP		3CCT	120/277V	DM	
	4FT 8FT		24/32/40W 4ft only 64/75/90W 8ft only				Blank=None EM= Emergency Battery (4ft only) MV= Microwave Sensor EM-MV= Emergency Battery+ Microwave Sensor (4ft only)

LED STRIP LIGHT – WATTAGE AND CCT SELECTABLE – DM SERIES

ACCESSORIES



Curved Plug-in Microwave Sensor

- Curved design special for strip light
- Detection Distance ≥ 9 feet
- Tiny Microwave Sensor with/out Bluetooth-Mesh
- Audio-Jack Classic Connection, 0/10V Dimming, with Daylight Harvesting



Internal Emergency Battery (4ft only)

- UL listed approved
- Emergency Power: 8W
- Charging Time: 24 hours
- Illumination Time: 90 minutes



Emergency Driver



Junction Box Cover Plate

- To cover the ceiling hole
- Color: White electrical box cover

PART #: ZL-STRIP-COVER-PLATE-JUNCTION



Linkable Connector

- For continuous row installation
- Color: White steel

PART #: ZL-STRIP-LINK-PLATE



Suspension Kit - V Hook

- For suspending the strip light
- Material: stainless steel

PART #: ZL-STRIP-VHOOK-SUSPENSION-CABLE



Remote Controller


- LCD Screen Display
- Memory and apply function
- Universal smart controller for dimmable sensor

PART #: ZL-REMOTE-HD05R


LED STRIP LIGHT – WATTAGE AND CCT SELECTABLE – DM SERIES

INSTALLATION

Surface Mounted

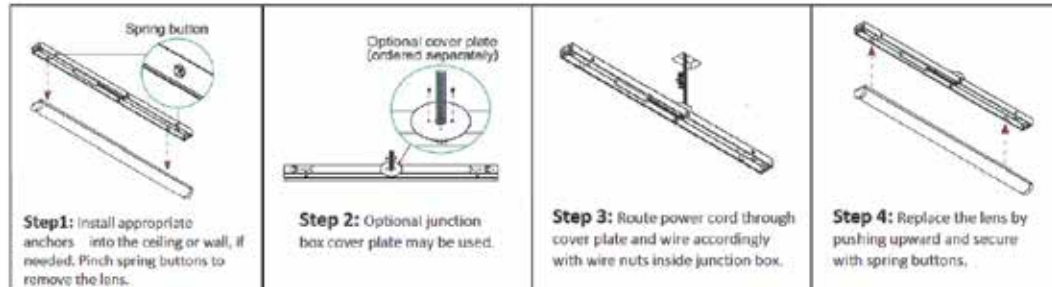


Optional V Hook Kit

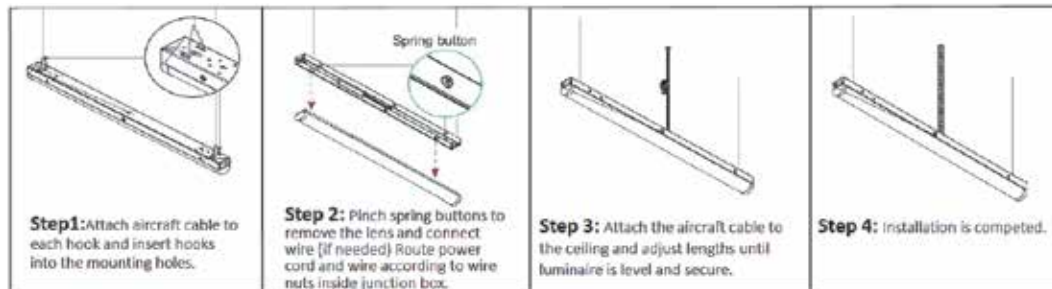


PHOTOMETRICS

ZL-4FT-STRIP-24/32/40W-3CCT-120/277V-DM

Wattage	24W, 32W, 40W selectable
PF	0.98
CI	84
THD	13.1%
Lumens	5,200
Efficacy (AC)	130 lm/W
CCT	35K, 40K, 50K selectable
Voltage Range	120/277VAC

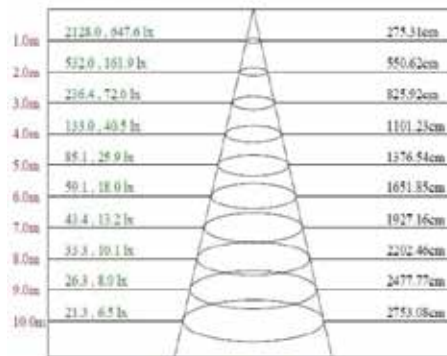

Max. Ave Beam angle of C111.5 plane 108.01

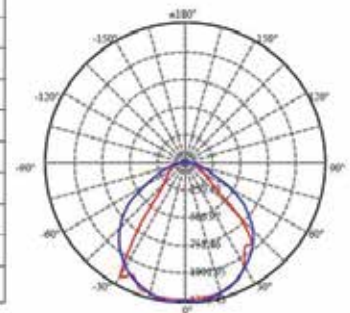

ZL-8FT-STRIP-64/75/90W-3CCT-120/277V-DM

Wattage	64W, 75W, 90W selectable
PF	0.973
CI	84
THD	11.8%
Lumens	11,700
Efficacy (AC)	130 lm/W
CCT	35K, 40K, 50K selectable
Voltage Range	120/277VAC



Max. Ave Beam angle of C292.9 plane 107.54

