

UFO HIGH BAY – WATTAGE AND CCT SELECTABLE – MK SERIES



PRODUCT SPECIFICATIONS

WATTAGES	100W - 100W, 80W, 60W selectable 150W - 150W, 125W, 100W selectable 240W - 240W, 200W, 150W selectable
COLOR TEMPS	35K, 40K, 50K selectable
EFFICACY	135 lm/W
LUMENS @ 40K	60W- 9,000; 80W- 11,200; 100W- 15,000; 125W- 18,500; 150W- 22,500; 200W- 30,000; 240W- 35,000
INPUT VOLTAGE	120/277V
CRI	>80
OPERATING TEMP	-40° to 122°F
BEAM ANGLE	120 degrees
RATED	IP65
LISTED	UL
WARRANTY	5 year



APPLICATIONS

- Warehouses
- Stadiums
- Factories
- Big Box Stores
- Supermarkets
- Distribution and Convention Centers


PRODUCT BUILDER

ex: ZL-UFO-60W/80W/100W-35K/40K/50K-D-MK

TYPE	WATTAGE	COLOR TEMP	DIMMING	MODEL
ZL-UFO	60W/80W/100W 100W/125W/150W 240W/200W/150W	35K/40K/50K	D	MK

UFO HIGH BAY – WATTAGE AND CCT SELECTABLE – MK SERIES

OPTIONS



WIREGUARD

ZL-WIREGUARD-150W-MK



YOKE BRACKET

ZL-YOKE-BRACKET-100W-MK

ZL-YOKE-BRACKET-150W-MK

ZL-YOKE-BRACKET-240W-MK



ALUMINUM REFLECTOR

ZL-AL-REFLECTOR-150-MK



PC REFLECTOR

ZL-90DEG-PC-REFLECTOR-MK



SAFETY ROPE

ZL-SAFTY-ROPE-MK




EMERGENCY DRIVER

ZL-EM-KIT-100/240W-MK



Part Number: ZL-MV-SENSOR-HD07VR-MH

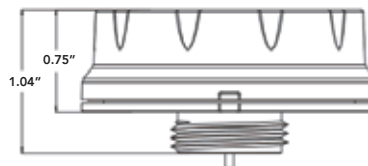

Part Number
Remote Control:
ZL-REMOTE-HD05R
(Sold Separately)

SPECIFICATIONS

Power Supply	10-15VDC, <30mA
Dim Control Output	DIM 0-10V
Mounting Height	12m/39ft Max.
Detection Distance	≥3m/9ft
Operating Temperature	-40°C-60°C
IP Rating	IP65


WARNING

1. The sensor should be installed by qualified electrician and ensure power is OFF before installation.
2. Please read the instruction carefully before using the product and keep it well for other users to read any time.
3. We reserve the right to modify any incorrect text, image and technical parameters.
4. Any unauthorized modification is forbidden. Otherwise all guarantees will be immediately invalid.
5. Product could be optimized without prior notice.


UFO HIGH BAY – WATTAGE AND CCT SELECTABLE – MK SERIES

PHOTOMETRICS

100W

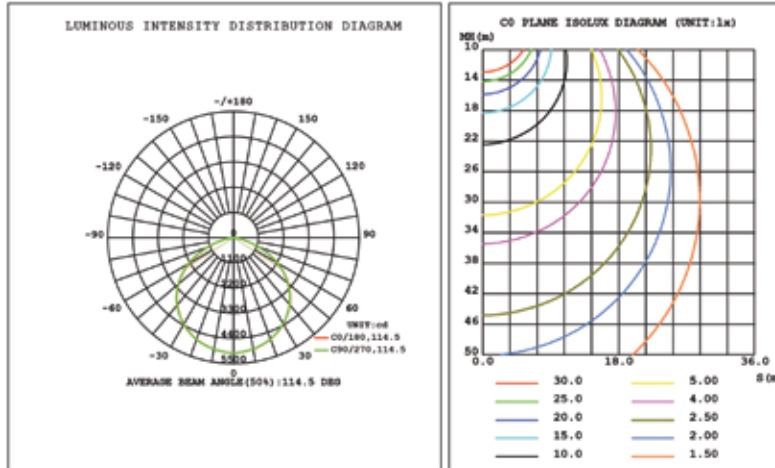

150W

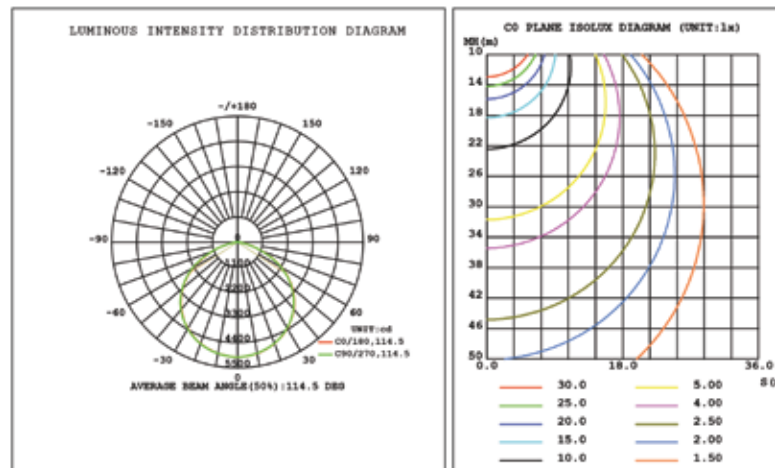

240W

