

## GARAGE PARKING LOT LED LIGHT – WATTAGE AND CCT SELECTABLE



### PRODUCT SPECIFICATIONS


|               |                                         |
|---------------|-----------------------------------------|
| WATTAGES      | 40/60/80W selectable                    |
| COLOR TEMPS   | 35/40/50K selectable                    |
| INPUT VOLTAGE | 120/277VAC                              |
| EFFICACY      | 130 lm/W                                |
| LUMENS        | 40W- 5,200<br>60W- 7,800<br>80W- 10,400 |
| CRI           | >80                                     |
| BEAM ANGLE    | 150 degrees                             |
| DIMENSIONS    | 10.06" x 10.06" x 2.73"                 |
| LISTED        | UL                                      |
| WARRANTY      | 5 year                                  |
| PART NUMBER   | ZL-GLLS-80/60/40-CCT-Y                  |

### OPTIONAL SENSOR



Part Number:  
**ZL-MS-SENSOR-HB-ARM-ANT-6-4T**  
 Optional Part Builder Part Number: MS

**IP65**

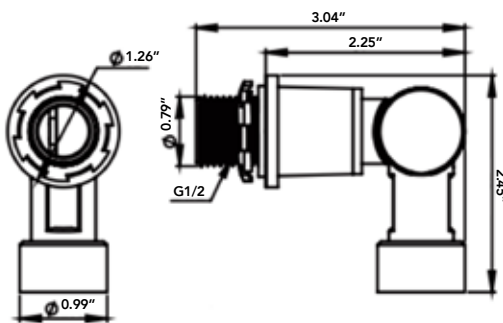

Part Number:  
**ZL-REMOTE-RC-100**  
 (Sold Separately)

### SPECIFICATIONS

|                       |                                  |
|-----------------------|----------------------------------|
| Power Supply          | 12V-24VDC, <30mA                 |
| Dim Control Output    | 0-10V, max. 25mA sinking current |
| Mounting Height       | Max 40ft. (12m)                  |
| Detection Radius      | 20%/50%/75%/100%(1-8m)           |
| Operating Temperature | -4°F-140°F (-20°C-60°C)          |
| IP Rating             | IP65                             |

### ⚠ WARNING

**NOTE:** Warm up time is 40 seconds. After the sensor connects input power first time, the light will keep on 40 seconds, then go to dimming to work normally.


**NOTE:** Factory Default Setting: 100% sensitivity, Hold on time: 5min, Daylight sensor is-Q-, Dimming level: 30%, Dimming time: 60 min.

**NOTE:** Any setting changed by remote control, the led light that sensor connect will on/off as confirm.

## GARAGE PARKING LOT LED LIGHT – WATTAGE AND CCT SELECTABLE

### LIGHT DISTRIBUTION


ZL-GLLS-80/60/40-CCT-Y

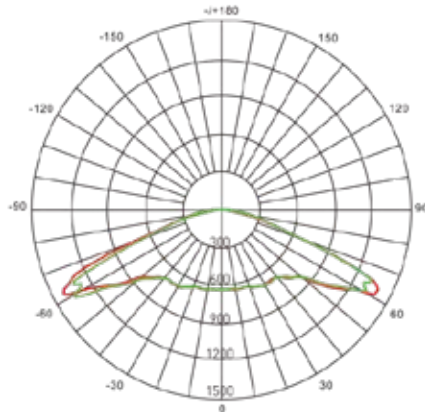

AVERAGE BEAM ANGLE(50%): 150°

UNIT:CD  
Lumens:5200LM  
Test Number:40W  
Test Number:5000K  
— C0/180, 154  
— C30/210,111.5  
— C60/240,109.7  
— C90/270,154.2


ZL-GLLS-80/60/40-CCT-Y

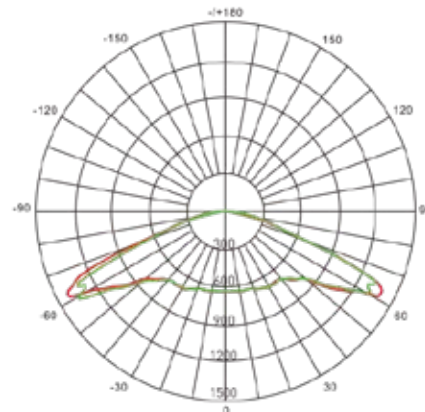

AVERAGE BEAM ANGLE(50%): 150°

UNIT:CD  
Lumens:7800LM  
Test Number:60W  
Test Number:5000K  
— C0/180, 154  
— C30/210,111.5  
— C60/240,109.7  
— C90/270,154.2

ZL-GLLS-80/60/40-CCT-Y

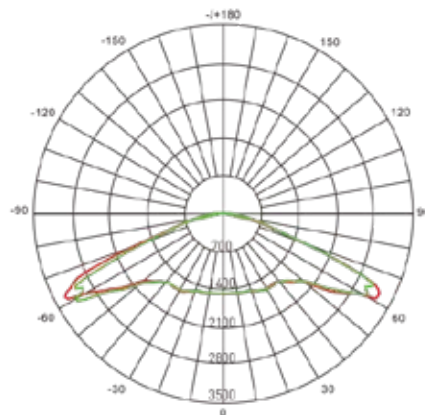

AVERAGE BEAM ANGLE(50%): 150°

UNIT:CD  
Lumens:10400LM  
Test Number:80W  
Test Number:5000K  
— C0/180, 154  
— C30/210,111.5  
— C60/240,109.7  
— C90/270,154.2