

## LED LINEAR HIGH BAY - SENSOR READY - 3 WATTAGE + 2 CCT SELECTABLE

1x2



1x4





### APPLICATIONS

- Warehouses
- Gymnasiums
- Industrial spaces

### PRODUCT SPECIFICATIONS

|                       |                                                                              |
|-----------------------|------------------------------------------------------------------------------|
| WATTAGES (SELECTABLE) | 1x2- 220/165/120W<br>1x4- 325/225/165W                                       |
| COLOR TEMPS           | 40/50K selectable                                                            |
| EFFICACY              | 140 lm/W                                                                     |
| LUMENS                | 120W- 16,800; 165W- 23,100;<br>220W- 30,800; 225W- 31,500;<br>325W- 45,500   |
| INPUT VOLTAGE         | 120/277V                                                                     |
| CRI                   | >80                                                                          |
| DIMMING               | 0-10V                                                                        |
| INSTALLATION          | Hanging                                                                      |
| SENSORS               | Microwave Sensor, PIR Sensor,<br>Bluetooth PIR Sensor Bi-Level DIM Dusk/Dawn |
| REMOTES               | Sold Separately                                                              |
| DIMENSIONS            | 1x2- 23.74" x 11.02" x 1.89"<br>1x4- 47.76" x 11.02" x 1.89"                 |
| LISTED                | ETL                                                                          |
| WARRANTY              | 5 year                                                                       |

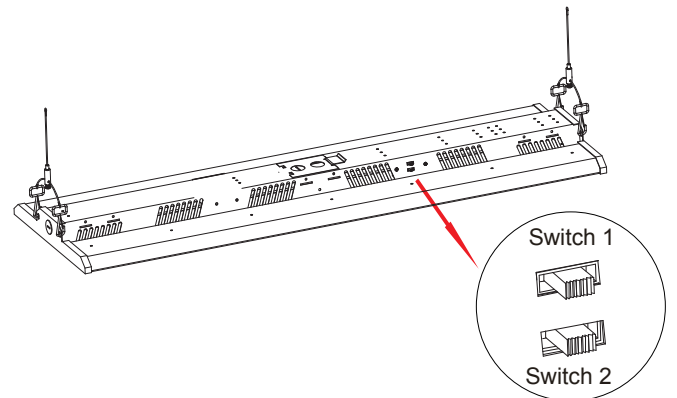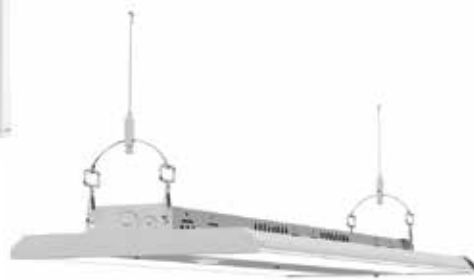

### PRODUCT BUILDER


ex: ZL-HB-1X2-220-165-120-2CCT-IG

| TYPE  | SIZE       | WATTAGE                    | COLOR TEMP | SENSOR                                                                                                    | EMERGENCY DRIVER                  |
|-------|------------|----------------------------|------------|-----------------------------------------------------------------------------------------------------------|-----------------------------------|
| ZL-HB | 1X2<br>1X4 | 220-165-120<br>325-225-165 | 2CCT       | Blank=None<br>MS=PIR Sensor<br>MV=Microwave Sensor<br>MSBL=Bluetooth Bi-Level PIR Sensor<br>DIM Dusk/Dawn | Blank=None<br>EM=Emergency Driver |



## LED LINEAR HIGH BAY - SENSOR READY - 3 WATTAGE + 2 CCT SELECTABLE

### SENSORS

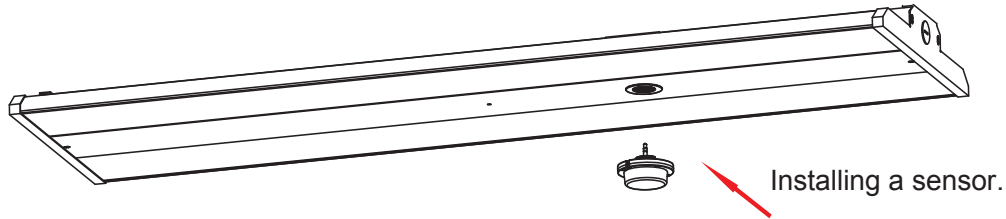

### PIR SENSOR



Optional Part Builder  
Part Number: MS

|                       |                                  |
|-----------------------|----------------------------------|
| Power Supply          | 12-24VDC, <30mA                  |
| Dim Control Output    | 0-10V, max. 25mA sinking current |
| Mounting Height       | Max. 40ft (12m)                  |
| Detection Distance    | 20%/50%/75%/100%(1-8m)           |
| Operating Temperature | -4°F-140°F (-20°C-60°C)          |

**IP65**



Part Number:  
ZL-REMOTE-RC-100  
(Sold Separately)

### MICROWAVE SENSOR



Optional Part Builder  
Part Number: MV

|                       |                                  |
|-----------------------|----------------------------------|
| Power Supply          | 12-24VDC, >50mA                  |
| Dim Control Output    | 0-10V, max. 25mA sinking current |
| Mounting Height       | Max. 50ft (15m)                  |
| Detection Distance    | 20%/50%/75%/100%(1-m)            |
| Operating Temperature | -20° to 60°C; -4° to 140°F       |

**IP65**



Part Number:  
ZL-REMOTE-RC-100  
(Sold Separately)

### BLUETOOTH - PIR SENSOR - BI-LEVEL DIM DUSK/DAWN



Optional Part Builder  
Part Number: MSBL

|                       |                         |
|-----------------------|-------------------------|
| Power Supply          | 12-24VDC, <30mA         |
| Dim Control Output    | DIM 0-10V               |
| Mounting Height       | 12m/39ft Max.           |
| Detection Distance    | ≥3m/9ft                 |
| Operating Temperature | -4°F-140°F (-20°C-60°C) |

**IP65**




## LED LINEAR HIGH BAY - SENSOR READY - 3 WATTAGE + 2 CCT SELECTABLE


### INSTALLATION INSTRUCTIONS

Please cut off the power before installation


1. Remove the dust proof cover.

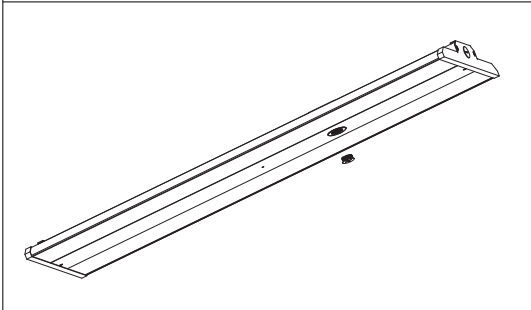


2. Installing a sensor.

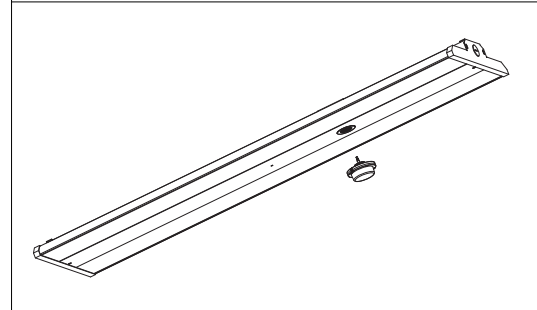


3. Drill two holes in the ceiling put the hook into the hole.

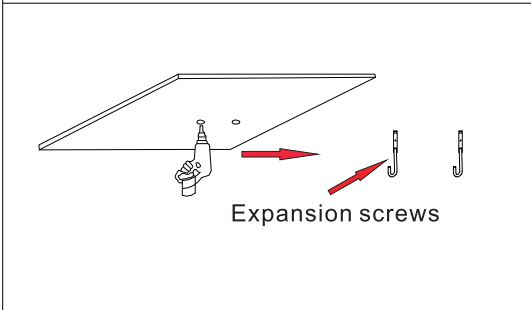


4. Take Y shape stainless steel rope out of the package.

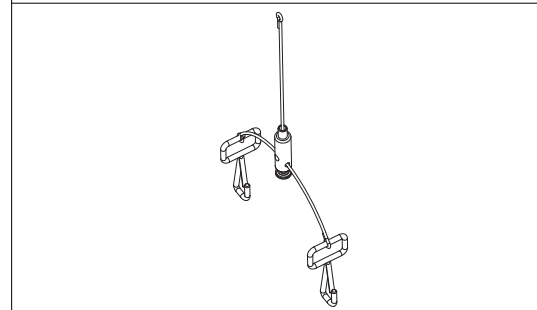


5. Insert the hook into the slotted holes as shown below.

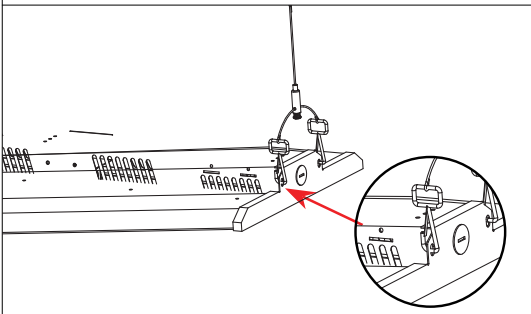

6. Hook up the safety steel on the ceiling anchor.

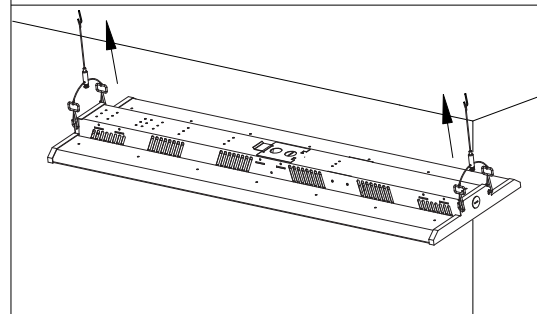

7. Turn off power, and make wiring connections with screw-on wire connectors insert the terminal cap and wires into the driver box.

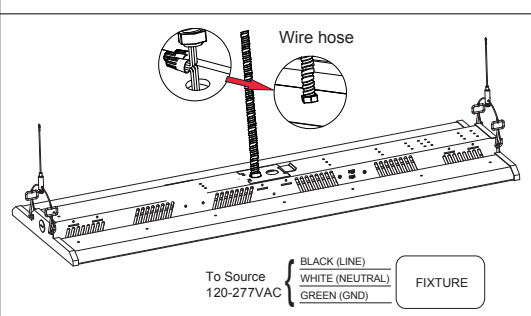

8. Toggle the dip switch to required power.

