



UFO HIGH BAY – WATTAGE AND CCT SELECTABLE – MK SERIES

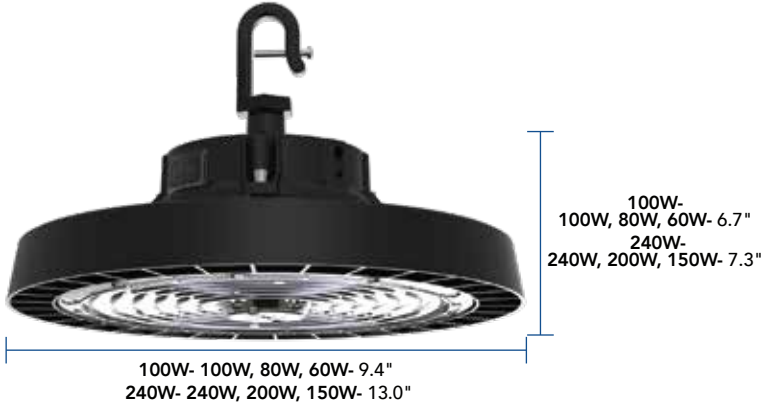

Standard Hook
Included

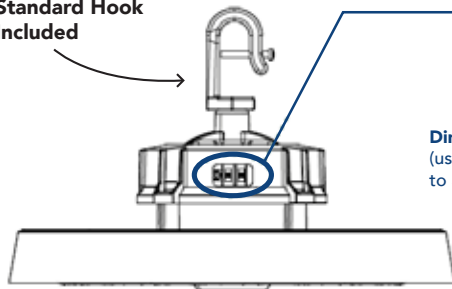

Wattage Selectable (with switch)

- 100W- 100W, 80W, 60W
- 240W- 240W, 200W, 150W

Color Temperature (CCT switch)

- 5000K
- 4000K
- 3500K

Dimming switch
(use screwdriver
to adjust)



PRODUCT SPECIFICATIONS

WATTAGES (SELECTABLE)	100W - 100W, 80W, 60W 240W - 240W, 200W, 150W
COLOR TEMPERATURE	35K, 40K, 50K selectable
EFFICACY	135 lm/W
LUMENS @ 40K	60W- 9,000; 80W- 11,200; 100W- 15,000; 150W- 22,500; 200W- 30,000; 240W- 35,000
INPUT VOLTAGE	120/277V
CRI	>80
OPERATING TEMPERATURE	-40° to 50°C; -40° to 122°F
BEAM ANGLE	120°
FIXTURE DIMENSIONS / WEIGHT	100W- 100W, 80W, 60W (9.4" x 6.7") / 4lbs. 240W- 240W, 200W, 150W (13.0" x 7.3") / 6.2 lbs.
FIXTURE COLOR	Black Standard; White optional - 100W, 80W, 60W
RATED	IP65
LISTED	UL
WARRANTY	5 year
PART NUMBERS	ZL-UFO-60/80/100W-35/40/50K-2V-D-MK ZL-UFO-240/200/150-35/40/50K-2V-D-MK ZL-UFO-60/80/100W-35/40/50K-2V-D-WH-MK




APPLICATIONS

- Warehouses
- Stadiums
- Factories
- Big Box Stores
- Supermarkets
- Distribution and Convention Centers



UFO HIGH BAY – WATTAGE AND CCT SELECTABLE – MK SERIES

OPTIONS




WIREGUARD

100W- 100W, 80W, 60W-
Contact Factory
240W- 240W, 200W, 150W-
ZL-WIREGUARD-150W-MK



YOKE BRACKET

ZL-YOKE-BRACKET-100W-MK
ZL-YOKE-BRACKET-150W-MK
ZL-YOKE-BRACKET-240W-MK

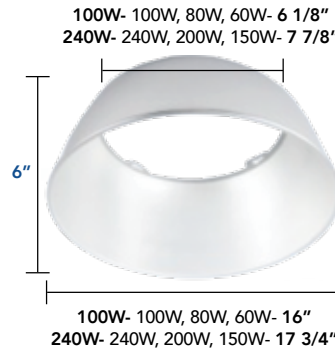

ALUMINUM REFLECTOR

100W- 100W, 80W, 60W-
ZL-AL-REFLECTOR-100-MK
240W- 240W, 200W, 150W-
ZL-AL-REFLECTOR-150-MK



PC REFLECTOR

100W- 100W, 80W, 60W-
ZL-90DEG-PC-REFLECTOR-60-MK
240W- 240W, 200W, 150W-
ZL-90DEG-PC-REFLECTOR-150-MK



SAFETY ROPE

ZL-SAFETY-ROPE-MK



EMERGENCY DRIVER

ZL-EM-KIT-100/240W-MK




Part Number: ZL-MV-SENSOR-HD07VR-MH



SPECIFICATIONS

Power Supply	10-15VDC, <30mA
Dim Control Output	DIM 0-10V
Mounting Height	12m/39ft Max.
Detection Distance	≥3m/9ft
Operating Temperature	-40°C-60°C
IP Rating	IP65

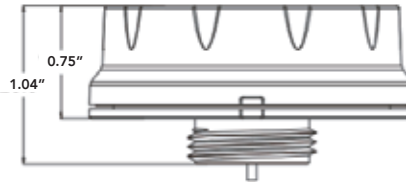

Part Number
Remote Control:
ZL-REMOTE-HD05R
(Sold Separately)

WARNING

1. The sensor should be installed by qualified electrician and ensure power is OFF before installation.
2. Please read the instruction carefully before using the product and keep it well for other users to read any time.
3. We reserve the right to modify any incorrect text, image and technical parameters.
4. Any unauthorized modification is forbidden. Otherwise all guarantees will be immediately invalid.
5. Product could be optimized without prior notice.

