

## LED STRIP LIGHT – WATTAGE AND CCT SELECTABLE – MK SERIES



Shown with  
optional sensor



### APPLICATIONS

- Warehouses
- Factories
- Offices
- Hotels
- Banks
- Rackings
- Under cabinets
- Surface mounts
- Retrofit fixtures
- Task lights
- Linear surface mount



### PRODUCT SPECIFICATIONS

WATTAGES	35W, 45W, 55W selectable
COLOR TEMP	35K, 40K, 50K selectable
INPUT VOLTAGE	120/277V
EFFICACY	130 lm/W
LUMENS	35W- 4,550; 45W- 5,850; 55W- 7,150
CRI	>80
DIMENSIONS	48" x 3.2" x 3"
BEAM ANGLE	120 degrees
AMBIENT TEMP	-20° - 40°C; -4° - 104°F
LED LIFESPAN (L70)	50,000 hours
RATED	IP20
LISTED	ETL
WARRANTY	5 year

### PRODUCT BUILDER

ex: ZL-4FT-STRIP-35-45-55W-CCT-120-277V-MK-MS


PRODUCT #	WATTAGE	COLOR TEMP	VOLTAGE	OPTION
ZL-4FT-STRIP	- 35-45-55W	- CCT	- 120-277V	- MK -

**MS** = Factory  
installed Sensor  
  
**(Blank)** = No Sensor

Optional bi-level sensor  
activated by motion and/or  
daylight contribution



Easy access to switches




## LED STRIP LIGHT – WATTAGE AND CCT SELECTABLE – MK SERIES

### OPTIONS



Optional Part Builder Part Number: MV  
Part Number with 90° Angle:  
ZL-MV-SENSOR-HB-ARM-HD07R

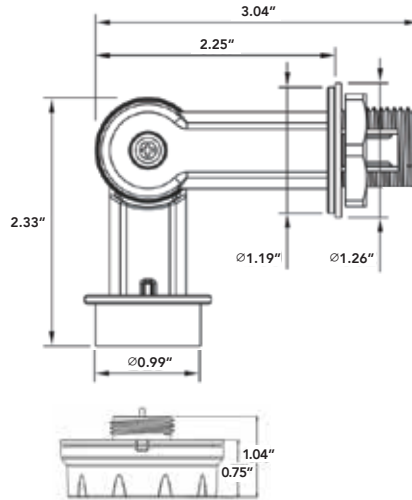

Part Number Remote Control:  
ZL-REMOTE-HD05R  
(Sold Separately)


### SPECIFICATIONS

Power Supply	10-15VDC, <30mA
Dim Control Output	DIM 0-10V
Mounting Height	12m/39ft Max.
Detection Distance	≥3m/9ft
Operating Temperature	-40°C-60°C
IP Rating	IP65


### WARNING

1. The sensor should be installed by qualified electrician and ensure power is OFF before installation.
2. Please read the instruction carefully before using the product and keep it well for other users to read any time.
3. We reserve the right to modify any incorrect text, image and technical parameters.
4. Any unauthorized modification is forbidden. Otherwise all guarantees will be immediately invalid.
5. Product could be optimized without prior notice.

### LIGHT DISTRIBUTION

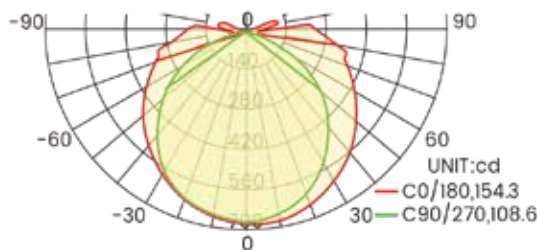

AVERAGE BEAM ANGLE (50%) : 131.4 DEG  
2ft - 20W

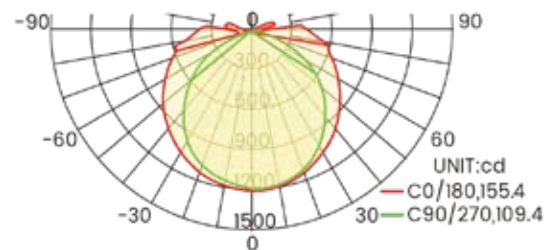

AVERAGE BEAM ANGLE (50%) : 132.4 DEG  
4ft - 40W