

BACK-LIT FLAT PANEL – WATTAGE AND CCT SELECTABLE – MK SERIES



The MK Series 2x2 and 2x4 Back-Lit Flat Panels have built-in wattage and color selectable options making it easy to adjust while in the field.

Flat Panels have a 0-10V dimmable driver and an emergency backup battery version is also available. These fixtures are great in applications like offices, schools, hospitals, and factories.



PRODUCT SPECIFICATIONS

WATTAGES	2'x2'- 20/30/40W selectable 2'x4'- 30/40/50W selectable
COLOR TEMP	35/40/50K selectable
EFFICACY	125 lm/W
LUMENS @ 35K	2'x2' 20W- 2,379; 30W- 3,186; 40W- 4,705 2'x4' 30W- 3,361; 40W- 4,030; 50W- 5,666
INPUT VOLTAGE	120/277VAC
CRI	>80
LENS	Frosted
AMBIENT TEMP	-20 to 40C; -4 to 104F
OPTIONS	Emergency Backup Driver
DIMENSIONS (LxWxH)	2'x2'- 23.75" x 23.75" x 1.5" 2'x4'- 23.75" x 47.75" x 1.5"
EMERGENCY BATTERY	Optional
RATED	IP20
LISTED	UL
WARRANTY	5 year

PART NUMBERS

ZL-FP-PA-CCT-2X2-MK
 ZL-FP-PA-CCT-2X2-EM-MK
 ZL-FP-PA-CCT-2X4-MK
 ZL-FP-PA-CCT-2X4-EM-MK

BACK-LIT FLAT PANEL – WATTAGE AND CCT SELECTABLE – MK SERIES

OPTIONS

EMERGENCY BACK-UP LED DRIVER



- Part Number: EM
- Wattages: 8W
- Voltage Input: 100-347VAC
- Output Voltage: 170VDC
- Input Power: 12W max.
- Battery: Lithium
- Battery Charging: 24 hours
- Operating Temperature: 32 – 122F
- Emergency Power: 90 minutes
- Dimensions: 12.51" x 1.26" x 0.83"
- Warranty: 5 year

SURFACE MOUNT KIT




- Part Numbers: 2x2 – ZL-SF-2X2
2x4 – ZL-SF-2X4
- Dimensions: 2x2 – 24.50" x 24.50" x 3.125"
2x4 – 24.50" x 47.813" x 3.125"
- For mounting your LED flat panel light to walls or ceilings
- Made of high-quality steel for enhanced durability
- Includes required hardware for swift and hassle-free installation

BACK-LIT FLAT PANEL – WATTAGE AND CCT SELECTABLE – MK SERIES

PHOTOMETRICS

2 x 2

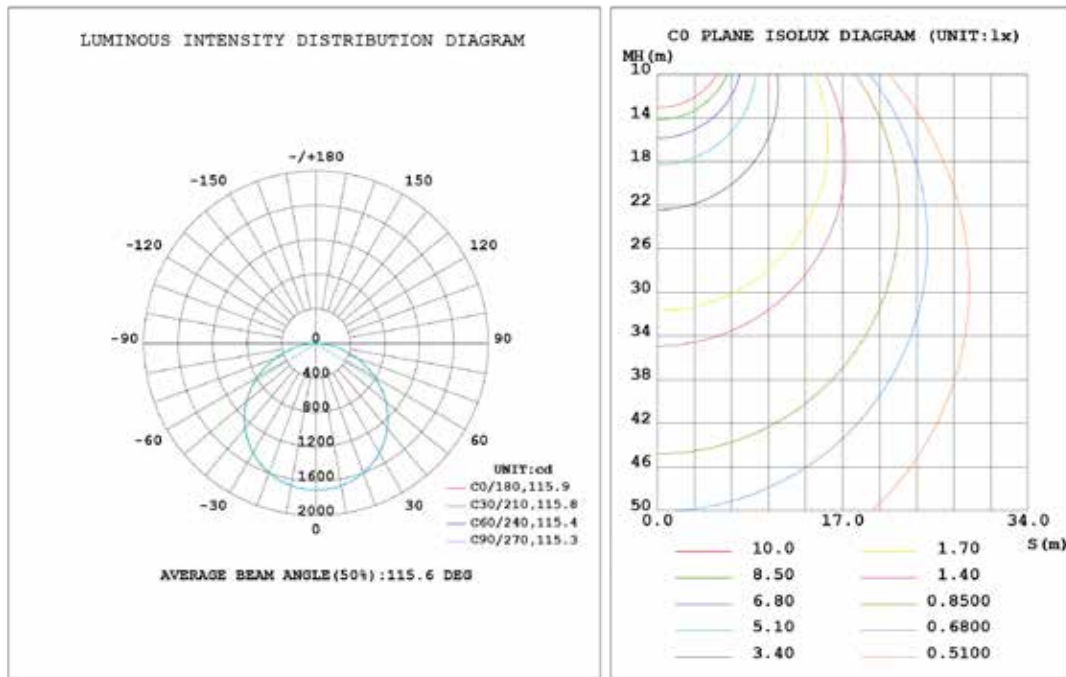

2 x 4

