

LED MINI WALL PACK WATTAGE AND CCT SELECTABLE WITH PHOTO SENSOR



PRODUCT SPECIFICATIONS

WATTAGES	15W/20W/25W selectable
COLOR TEMPS	30K/40K/50K selectable
EFFICACY	120 lm/W
LUMENS	15W- 1,800; 20W- 2,400; 25W- 3,000
INPUT VOLTAGE	120/277V
CRI	Ra>80
DIMMING	0-10V
OPERATING TEMP	-4° to 113°F
LED LIFESPAN (L70)	Lumen Maintenance over 70% @ 50,000+ hours
LENS	Clear Baffled
HOUSING	Bronze
ACCESSORIES	PC: Photocell Control Pre-Installed
RATED	Wet Locations IP66
LISTED	ETL
WARRANTY	5 year
PART NUMBER	ZL-HYA-MWP-962-3W3CCT



IP66



APPLICATIONS

Ideal LED Lighting for both indoor and outdoor locations including decks, porches, patios, front entryways, walkways, exterior corridors, or other common areas.


DIMENSIONS



LED MINI WALL PACK WATTAGE AND CCT SELECTABLE WITH PHOTO SENSOR

SETTINGS


The transparent cover on the side can be screwed off easily.

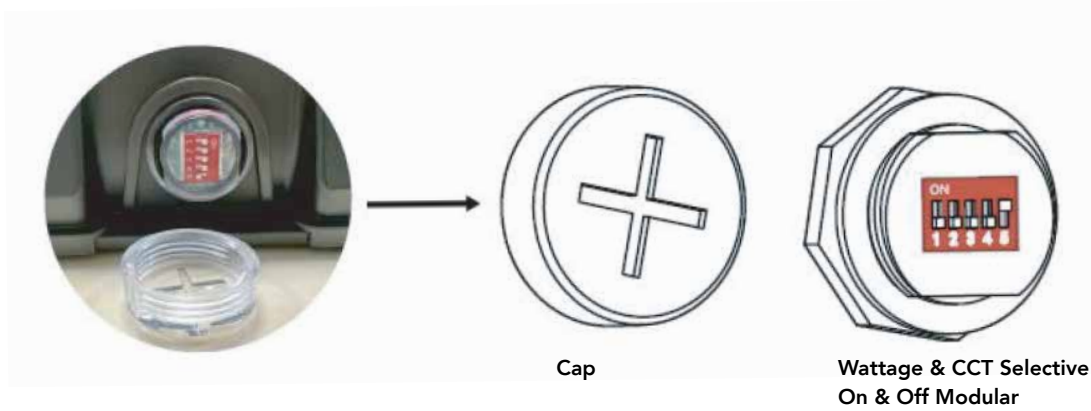


Cap

Wattage & CCT Selective Sensor On & Off Modular


Wattage Selectable



25W




20W




15W

Photocell




Sensor ON




Sensor OFF


CCT Selectable



5000K



4000K



3000K