

LED WALL PACK WITH POLYCARBONATE LENS – WATTAGE AND CCT SELECTABLE – MK SERIES



Polycarbonate
Plastic Lens



Slim Design



PRODUCT SPECIFICATIONS

| | |
|--------------------|--|
| WATTAGES | 60W, 80W, 100W selectable |
| COLOR TEMPS | 30K, 40K, 50K (selectable) |
| INPUT VOLTAGE | 120/277VAC |
| LUMENS @ 40K | 60W- 8,700; 80W- 10,875; 100W- 14,500 |
| EFFICACY | 30K- 130 lm/W; 40K- 145 lm/W; 50K- 135 lm/W |
| CRI | >80 |
| BEAM ANGLE | 110 degrees |
| LED LIFESPAN (L70) | 50,000 hours |
| DIMENSIONS | 13" x 8.3" x 4.7" |
| DIMMING | 0-10V |
| INCLUDES | Selectable Photocell Sensor |
| LENS | Polycarbonate Unbreakable Plastic Lens |
| LISTED | UL |
| RATED | Wet Location |
| WARRANTY | 5 year |
| PART NUMBER | ZL-WP-60-80-100-CCT-PC-MK-P |



APPLICATIONS

Exterior walls of buildings
and warehouses.

LED WALL PACK WITH POLYCARBONATE LENS – WATTAGE AND CCT SELECTABLE – MK SERIES

OPTIONS

Selectable Photocell Sensor Switch


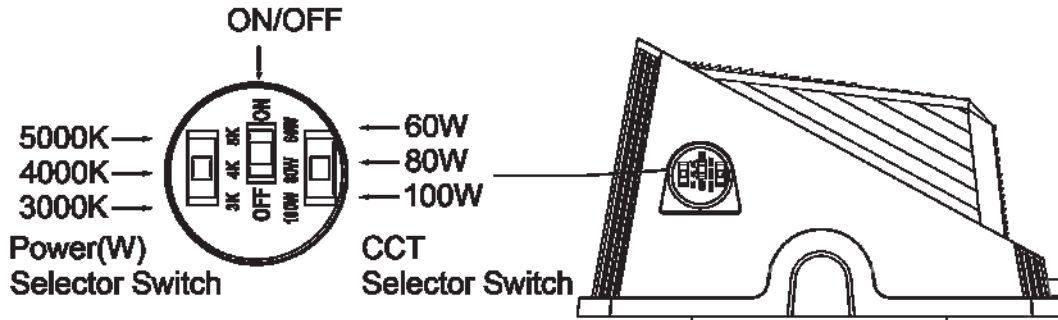


FIG.5

Ambient light sensor

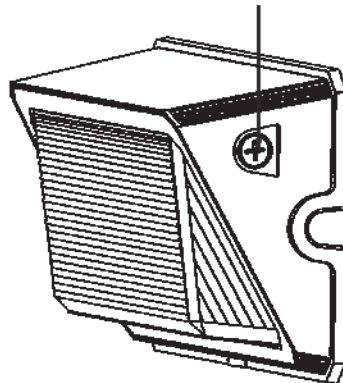

The fixture has a built-in photocell sensor that automatically adjusts its illumination based on ambient light levels.

INSTALLATION

