

6" LED ARCHITECTURAL DOWNLIGHT REMODEL FRAME IN KIT



PRODUCT SPECIFICATIONS

| | |
|--------------------------|---|
| WATTAGES | 10W, 14W, 22W, 32W, 44W |
| COLOR TEMPS | 27K, 30K, 35K, 40K |
| EFFICACY | 100 lm/W |
| LUMENS | 10W- 1,000; 14W- 1,400; 22W- 2,200; 32W- 3,200; 44W- 4,400 |
| INPUT VOLTAGE | 120/277V |
| CRI | 90 |
| DIMMABLE | 120/277VAC, Tri-Mode (0~10V/Triac/ELV) |
| EMERGENCY BATTERY | Sold separately |
| WARRANTY | 5 year |



APPLICATIONS

- Office spaces
- Retail stores
- Restaurants

Accentuating architecture or design elements such as artwork, alcoves, or ceilings.


Suitable for damp locations

PRODUCT BUILDER

ex: ZL-LED-AD-RM-FINK-6IN-10W-27K-TL

| | TYPE | STYLE | SIZE | WATTAGE | COLOR TEMP | |
|--------|----------------------------|------------------------------|------|---------------------------------|--------------------------|----|
| ZL-LED | AD | RM-FINK | 6IN | | | TL |
| | AD=Architectural Downlight | RM-FINK=Remodel Frame in Kit | | 10W 14W 22W 32W 44W | 27K 30K 35K 40K | |

DIMENSIONS

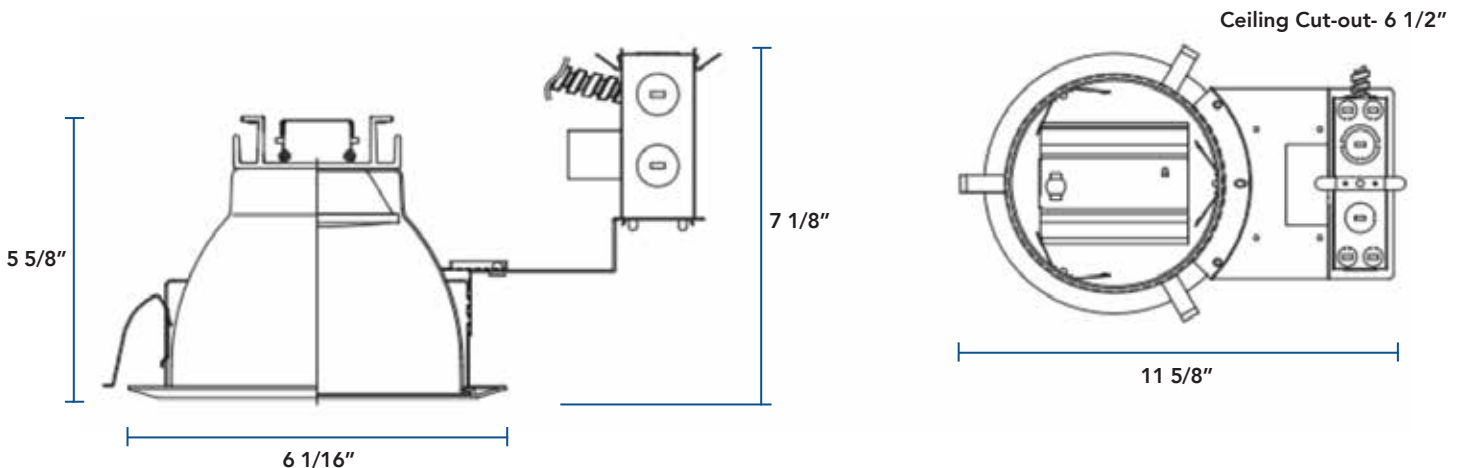

6" LED ARCHITECTURAL DOWNLIGHT REMODEL FRAME IN KIT

ARCHITECTURAL DOWNLIGHT TRIMS



Specular Open Reflector



Baffle w/ Reflector



Baffle w/ Regressed Lens



Reflector w/ Regressed Lens



Wall Wash w/ Reflector Plate



Reflector w/ Frosted Floating Lens



Reflector w/ Frosted 3.5" Center Hole Lens



Optional Sloped Ceiling Adaptor

DISCLAIMER:

Please note that not all Downlight housing compatibility trims in this catalog are compatible with every product line. Compatibility may vary based on specific product specifications, installation requirements, and system configurations. We recommend verifying product compatibility with your specific lighting needs before purchasing. If you have any questions or need assistance, please contact our sales team for further guidance.

PRODUCT BUILDER

ex: ZL-LED-AD-FINK-4IN-10W-27K-TL

| ZLED-TRIM | SIZE | STYLE | REFLECTOR FINISH | TRIM RING FINISH |
|-----------|--|--|-----------------------------------|---|
| ZLED-TRIM | 4=4 inches 6=6 inches 8=8 inches | SOR=Specular Open Reflector BRW=Baffle w/ Reflector - White BRK=Baffle w/ Reflector - Black BRLW=Baffle w/ Regressed Lens - White BRLK=Baffle w/ Regressed Lens - Black RRL=Reflector w/ Regressed Lens WWRP=Wall Wash w/ Reflector Plate RFFL=Reflector w/ Frosted Floating Lens RFCHL=Reflector with Frosted 3.5" center Hole Lens SCA=Optional Sloped Ceiling Adaptor* | WP=White Painted HZ=Haze Clear | WH=White Plastic Trim Ring - Standard WHR=White Metal Ring SN=Satin Nickel CH=Chrome PSF=Polished Self Flange (for Open or Wall Wash Reflectors*) |