


## NEON-STYLE LINE VOLTAGE FLEXIBLE LED STRIP LIGHTS

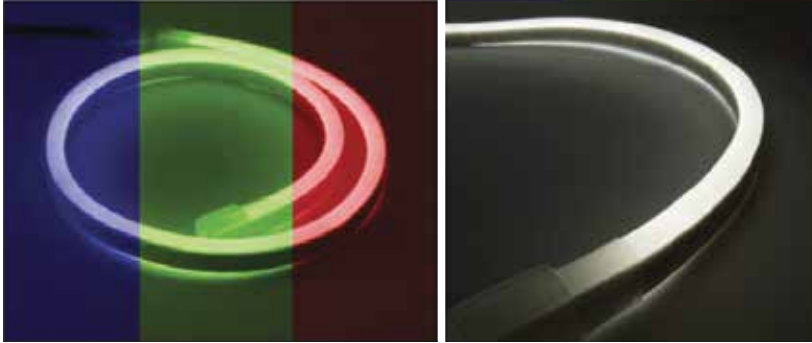


### APPLICATIONS

- Kitchens
- Showrooms
- Outdoor applications
- Bars
- Cove lighting
- Custom projects
- Walls
- Under bars
- Walkways
- Tent lighting

### PRODUCT SPECIFICATIONS

WATTAGES	1.5W; *RGB- 3.04W
COLOR TEMPS	30K, 40K, Red, Yellow, Orange, Blue, Green, RGB
LUMENS	60 per foot
INPUT VOLTAGE	120VAC
BEAM ANGLE	120°
MAX LENGTH	165 ft. (per power supply)
DIMENSIONS (WxH)	0.55" x 1.02"
CUTTABLE INCREMENTS	19.69"; *RGB- 39.37"
RATED	IP65
LISTED	UL
WARRANTY	2 year

### MINIMUM BEND RADIUS

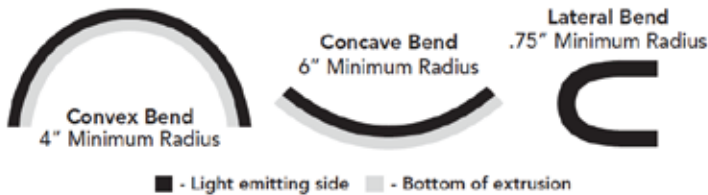

### PART NUMBERS

- NEON-LF-120VAC-30K
- NEON-LF-120VAC-40K
- NEON-LF-120VAC-R
- NEON-LF-120VAC-Y
- NEON-LF-120VAC-O
- NEON-LF-120VAC-B
- NEON-LF-120VAC-G
- NEON-LF-120VAC-RGB\*

### NEON-STYLE LINEFLEX ACCESSORIES



PRODUCT #	DESCRIPTION
A NEON-LF-PWR	1' Power supply cord (AC wire with plug)
B NEON-LF-CONN	Connects two sections of neon LF
C NEON-LF-END	End cap
D NEON-LF-2PIN	For use with single color
E NEON-LF-MOUNT	Mounting bracket, 3" x 5/8" x 3/4"
F JUMP-12INCH-NEON	12" Connector cable
G NEON-RGB-CONTROLLER	RGB controller, 1,500W MAX, 120VAC
NEON-LF-4PIN	For use with RGB
H NEON-LF-39"-MOUNT	39" Aluminum Mounting Channel for Single Color and RGB Neon

\* Use with the single color neon products (NEON-LF-120VAC-W, WW, R, Y, O, B, or G)

\* Use only with the NEON-LF-120VAC-RGB

H Mounting Channel NEON-LF-39"-MOUNT

39" length, 11/16" width; 5/16 height