

## OVAL HID RETROFIT KIT – LY SERIES



Supplied with both mounting options

Brackets can be mounted vertically or horizontally in fixture



### APPLICATIONS

- Wall pack
- Flood Light
- Area Light
- Canopy
- High Bay
- Low Bay

### PRODUCT SPECIFICATIONS

<b>WATTAGES</b>	60W, 100W, 150W, 200W, 240W, 300W, 360W
<b>COLOR TEMPS</b>	27K, 30K, 40K, 60K, 65K Standard 50K
<b>EFFICACY</b>	140 lm/W
<b>LUMENS @ 50K</b>	60W- 8,400; 100W- 14,000; 150W- 21,000; 200W- 28,000; 240W- 33,600; 300W- 42,000; 360W- 50,400
<b>INPUT VOLTAGE</b>	120/277VAC; 480V Special Order
<b>CRI</b>	>80Ra
<b>INPUT FREQUENCY</b>	50/60HZ
<b>OPERATING TEMP</b>	-4° to 113°F
<b>LED LIFESPAN (L70)</b>	50,000
<b>DIMENSIONS</b>	60W+100W+150W- 7.28" x 4.92" x 2.36" 200W+240W- 10.43" x 4.92" x 2.36" 300W+360W- 13.07" x 4.92" x 2.36"
<b>SUGGESTED HID EQUIV.</b>	60W- 300W; 100W- 400W; 150W- 700-800W; 200W- 800-1000W; 240W- 1000W; 300W- 1500W; 360W- 2000W
<b>POWER FACTOR</b>	≥0.9
<b>THD</b>	<15%
<b>DIMMING</b>	Optional
<b>RATED</b>	IP20
<b>LISTED</b>	ETL
<b>WARRANTY</b>	5 year



### PRODUCT BUILDER

ex: ZL-YL-PYR-E26-30-50K-LY

TYPE	WATTAGE	COLOR TEMP	INPUT VOLTAGE
ZL-RK			
	60W 100W 150W 200W 240W 300W 360W	Standard 50K=5000K 27K=2700K 30K=3000K 40K=4000K 60K=6000K 65K=6500K	Blank=120/277V 480V=480V (Special Order)


# OVAL HID RETROFIT KIT – LY SERIES

## PHOTOMETRICS

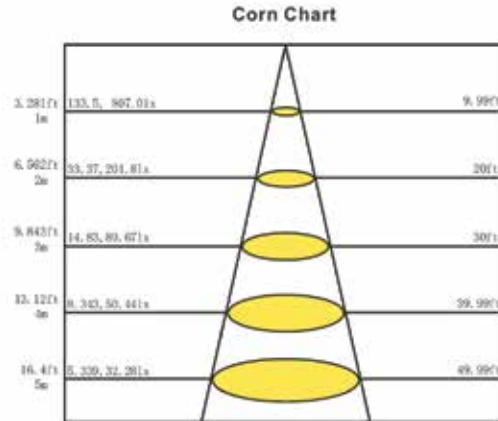
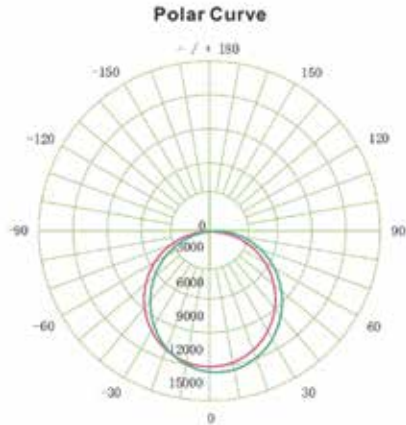


## DIMENSIONS

### 60W / 100W / 150W

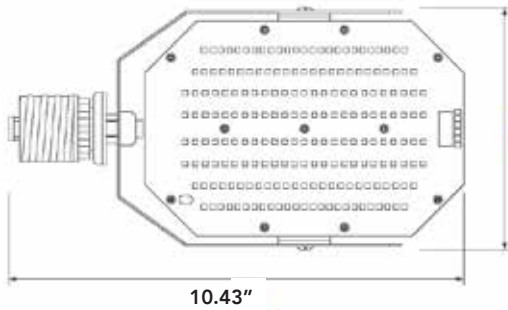

### 200W / 240W

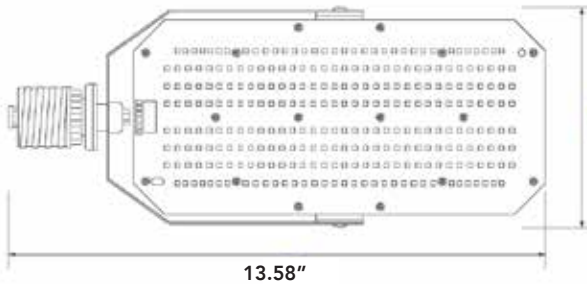

### 300W / 360W

