

80°C (176°F) HI HEAT LINEAR HIGH BAY



PRODUCT SPECIFICATIONS

WATTAGES	100W, 150W, 200W
COLOR TEMPS	50K (30K, 40K, 60K optional)
EFFICACY	150 lm/W
LUMENS	100W- 15,000; 150W- 22,500; 200W- 30,000
INPUT VOLTAGE	120/277V, 480V special order
CRI	Ra70 (Ra80 optional)
DIMMING	0-10
OPERATING TEMP	-40°C (-40°F) to 80°C (176°F)
BEAM ANGLE	60/90/120°
MOUNTING	Hanging mount, Ceiling mount
MATERIAL	Housing- Aluminum alloy Polycarbonate optical Lens + Tempered glass
LED LIFESPAN (L70)	100,000 hours
FIXTURE COLOR	Choice of silver, black, white
RATED	IP65
WARRANTY	3 year

APPLICATIONS

- Steel mills and foundries
- Glass manufacturing facilities
- Power Plants
- Smelting plants
- Heavy industrial kitchens
- Chemical processing plants
- Waste treatment facilities

IP65

PRODUCT BUILDER

ex: ZL-HB-LHB-176-100W-30K-60-70-SILVER-ECA

TYPE	WATTAGE	COLOR TEMP	BEAM ANGLE	CRI	COLOR	ECA
ZL-HB-LHB-80C						
	100W 150W 200W	30K 40K 50K 60K	60 90 120	70 80	Silver Black White	


Special Order Item Disclaimer

Special order items are custom-ordered specifically to meet your requirements. As such, these items are **non-cancelable, non-returnable, and non-refundable** once the order has been placed and confirmed. We encourage you to carefully review all product specifications, dimensions, and details prior to placing your order. If you have any questions, our team is happy to assist before the order is finalized. By completing your purchase, you acknowledge and accept these terms.


80°C (176°F) HI HEAT LINEAR HIGH BAY

MOUNTING OPTIONS

Hanging Mount

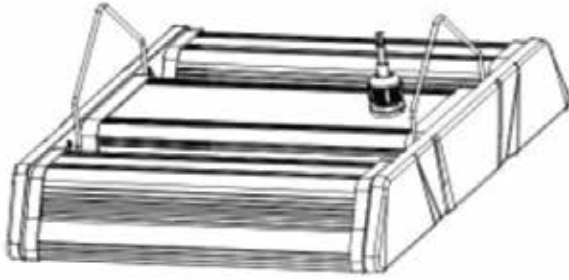

Ceiling Mount

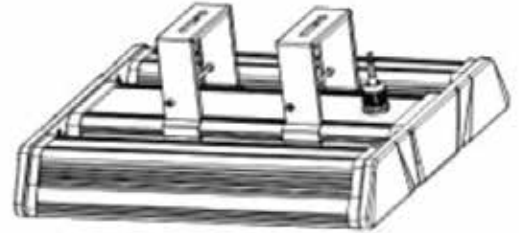

DIMENSIONS

