


**MADE IN AMERICA**

## BUILD YOUR OWN LED HIGH BAY


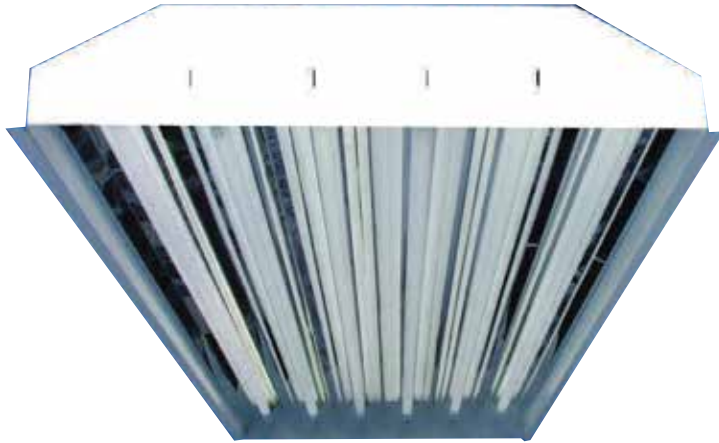


### APPLICATIONS

- Warehouses
- Manufacturing facilities
- Distribution centers
- Cold storage and freezers
- Retail stores and big-box stores
- Gymnasiums and sports arenas
- Convention centers and exhibition halls
- Airplane hangars
- Event venues
- Parking garages (with tall ceilings)
- Agricultural buildings (barns, riding arenas, greenhouses)
- Transportation terminals (bus depots, train stations)

### BUILD YOUR OWN LED HIGH BAY PRODUCT FEATURES

<b>WATTAGES</b>	<b>Magnilumen Plus High Output:</b> 2 bars- 120W; 4 bars- 240W 6 bars- 360W; 8 bars- 480W
<b>COLOR TEMPS</b>	<b>Magnilumen Plus High Output:</b> 40K, 50K; Special Order: 30K, 35K
<b>LUMENS</b>	See lumens chart
<b>INPUT VOLTAGE</b>	120/277V
<b>LED LIFESPAN (L70)</b>	<b>Magnilumen Plus High Output: 50,000 hours</b>
<b>MOUNTING</b>	Equipped with slots for chain or cable hanging and knockouts for pendant mounting. Unit can be mounted individually or in continuous run. 7/8" knockouts are provided in back and end plates for conduit connector.
<b>CONSTRUCTION</b>	Designed from heavy gauge die formed aluminum for reduced weight and maximum heat dissipation. Heat removal vents are included to reduce heat buildup in electrical raceway. End Plates are designed from heavy gauge die formed steel for strength durability. Units are finished in a white polyester powder coating for maximum reflectivity. Reflector is designed from multifaceted 95% specular reflective aluminum designed to maximize efficiency and increase performance.
<b>QUANTITY OF BARS</b>	12 5/8" - 2, 4 19 7/8" - 4, 6, 8
<b>OPTIONS</b>	EM + Emergency MS - Motion Sensing Sensors - Optional External PIR Sensor Internal Microwave Sensor Motion Sensor include AO Drivers
<b>EMERGENCY BATTERY</b>	Optional 20W
<b>RATED</b>	Damp Location
<b>LISTED</b>	UL Listed Body
<b>WARRANTY</b>	5 year

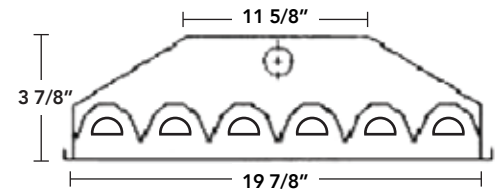

**MADE IN AMERICA**

**BUILD YOUR OWN LED HIGH BAY**



**PRODUCT BUILDER**

PRODUCT #	SIZE	COLOR TEMP	# OF BARS	BAR LENS	WATTAGE	OPTIONS
ZL-HB	12=12 5/8" x 4' 19=19 7/8" x 4'	40K 50K (Special Order) 30K 35K	12 5/8" 2 4 19 7/8" 4 6 8	CL=Clear FR=Frosted Blank=None	2 bars 120W 4 bars 240W 6 bars 360W 8 bars 480W	EM20=Emergency Driver 20 Watts (w/battery backup) Blank=None  <b>SENSORS</b> (Include Bi-Level) AO Driver Included with Motion Sensor  EMS= External Motion Sensing IMS= Internal Motion Sensing

**LUMENS**

WATTAGE	LUMENS
32W	5,280L
62W	10,230L
100W	16,500L
120W	19,800L

**HO Bar per Wattage**

30W - 1 - 2 ft bar
62W - 2 - 2 ft bars
62W - 1 - 4 ft bar
120W - 2 - 4 ft bars
240W - 4 - 4 ft bars