

## 24V CONSTANT VOLTAGE 96W DRIVER 5-IN-1 DIMMABLE



24V 96W class 2 power supply with built-in wiring compartments for line and low voltage connections 5-in-1 forward and reverse phase dimming: TRIAC / ELV / MLV, 0-10V, 1-10V, Potentiometer, 10V PWM

### APPLICATIONS:

LED tape, 24V Ceiling Fixtures

### FEATURES & BENEFITS:

- 120-277V AC input
- Built-in power factor correction, PF > 0.98
- Protections: short circuit, over-voltage, over-heat, over-load
- Multiple knock-outs for easy wiring
- Minimum / Maximum Load: 9.6W / 96W
- 0.5 second start time


### PRODUCT SPECIFICATIONS

POWER	96W
INPUT	120V-277VAC
OUTPUT V / A	24V DC / 4A
DIMMABILITY	TRIAC, 0-10V, 1-10V, Pot., 10V PWM
APPROVED LOCATION	Dry, Damp & Wet Locations
WIRING VOLUME	8.75 cu in per chamber
AMBIENT TEMP	-40° to 140°F; -40° to 60°C
DIMENSIONS	8 3/4" x 3 1/2" x 1 3/4"
LISTED	c UL us
WARRANTY	7 year


### PART NUMBER

**ZL-DRIVER-24V-96W-5IN1**


### WIRING DIAGRAM

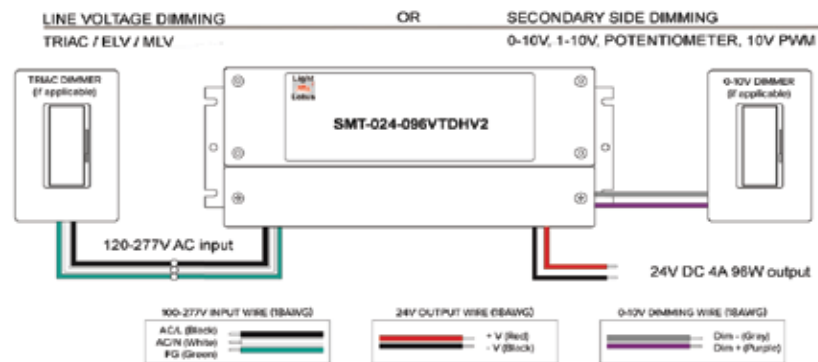

### DIMENSIONS

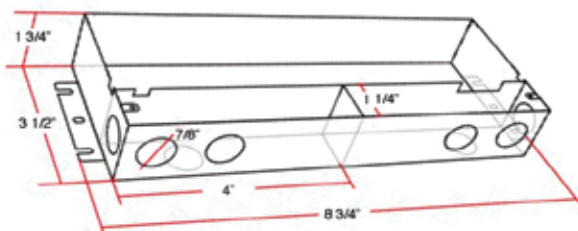

### DERATING CURVE - LOAD ACCORDINGLY

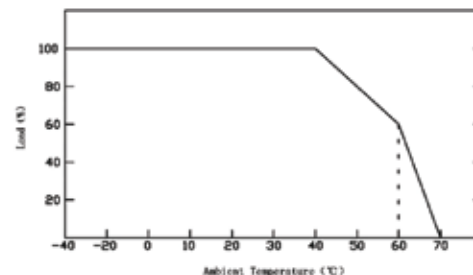

**WARNING:** Do not exceed ambient temperature range from -40°F (-40°C) to +140°F (+60°C). Please mount in a shaded area or when mounted indoors install in a well-ventilated area. Failure to follow these instructions could lead to overheating, short life and void the warranty.

Specifications and actual product may vary.

Office (800) 679-9243 • sales@zledlighting.com • www.zledlighting.com