

## LED FULL CUT-OFF WALL PACK - WATTAGE AND CCT SELECTABLE - LH SERIES




### APPLICATIONS

- Building Facades
- Walkways
- Driveways
- Patios
- Decks
- Parking Garages


### PRODUCT SPECIFICATIONS

WATTAGES	45/60/75W selectable
COLOR TEMPS	30K, 40K, 50K selectable
EFFICACY	127 lm/W
LUMENS @ 30K	45W- 5,715; 60W- 7,620; 75W- 9,534
INPUT VOLTAGE	120/277V, 50/60 Hz
CRI	Ra>70
DIMMING	0-10V
BEAM ANGLE	90° x 100°
OPERATING TEMP	-40° to 104°F; -40° to 40° C
LED LIFESPAN (L70)	Lumen Maintenance over 70% @ 50,000+ hours
RATED	Wet Location
FIXTURE COLOR	Bronze
MOUNTING	Bracket Fixed
MOUNTING HEIGHT	14-16 ft
DIMENSIONS (LxWxH)	12.60" x 5.12" x 7.48"
LISTED	ETL
WARRANTY	5 year
<b>PART NUMBER</b>	<b>ZL-WPFC-45-60-75-CCT-LH</b>

### DIMENSIONS

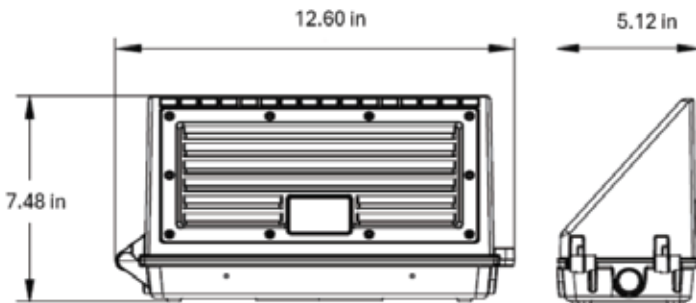


### PHOTOMETRICS

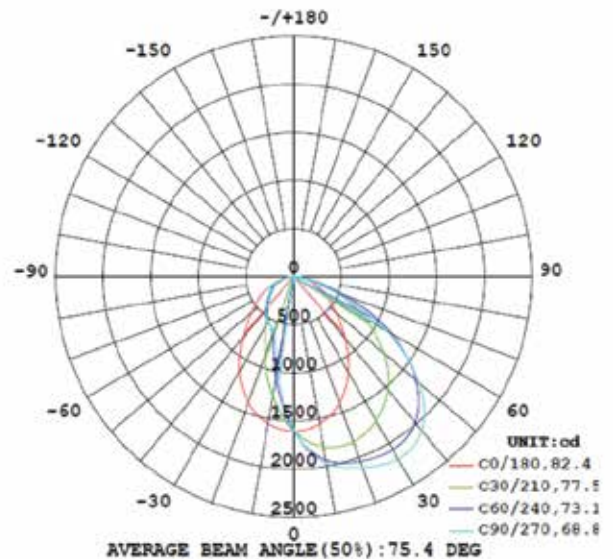


## LED FULL CUT-OFF WALL PACK - WATTAGE AND CCT SELECTABLE - LH SERIES

### INSTALLATION INSTRUCTIONS


1. Use a screwdriver to unscrew the lamp screws and remove the upper half of the fixture.

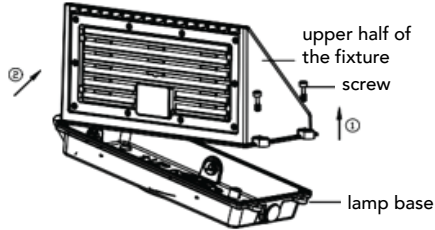


2. Unscrew the cover of the entry hole on the lamp base and remove the cover.

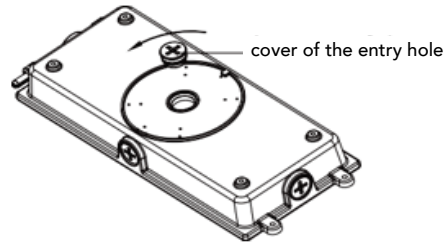


3. According to the embedded terminal box, punch the corresponding mounting hole on the lights mount.

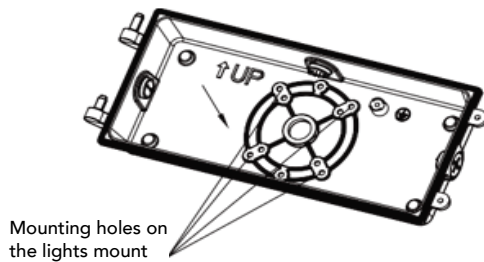


4. Put the input line in the embedded box. Pass through the waterproof pad and pass through the lamp base.

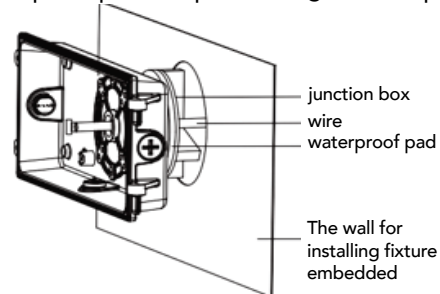


5. Use screw to lock the lamp case on the embedded junction box.



4. Connect the input wire and the dimming wire of the light, then put connected wires into the embedded terminal box.

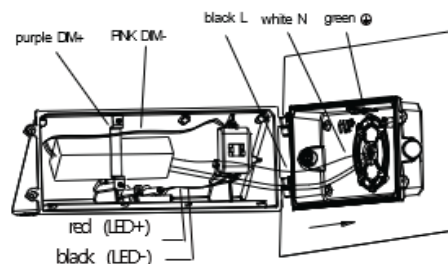

7. After the wiring is completed, set the CCT and power value through the internal DIP switch. According to label, users can dial the desired color temperature value and power value.

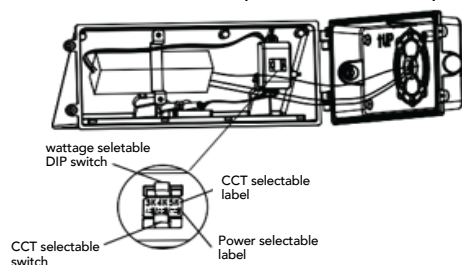

8. Use screws to lock the fixture. Installation complete.

