

SLIMLINK LED LINKABLE LINEAR FIXTURE



Frosted Lens



PRODUCT SPECIFICATIONS

WATTAGES	4ft: 22/30/40W selectable 2ft: 10/15/20W selectable (special order)
COLOR TEMPS	30/40/50/57/65K selectable
INPUT VOLTAGE	AC 120/277V
EFFICACY	150 lm/W
BEAM ANGLE	120°
CRI	82
OPERATING TEMP	-4°F to 113°F
LED LIFESPAN (L70)	50,000 hours
RATED	IP20
LISTED	ETL
LENS	Frosted
WARRANTY	5 year

PART NUMBERS

ZL-SLIM-4FT-40/30/22W-FA-BL

ZL-SLIM-2FT-20/15/10W-FA-BL

INSTALLATION OF LINKING

Max of 600W for linking applications at 120V
Max of 1200W for linking applications at 277V

When you need to Integrate Linking in different sizes, please refer to below:

Size	Wattage	Linkable Qty @120V PCS	Linkable Qty @277V PCS
2ft (special order)	20W	30	60
	15W	40	80
	10W	60	120
4ft	40W	15	30
	30W	20	40
	22W	27	54

2ft	4ft
40W	20W
30W	15W
22W	10W




SLIMLINK LED LINKABLE LINEAR FIXTURE



Slide Switch for CCT Selection



Slide Switch for Wattage Selection

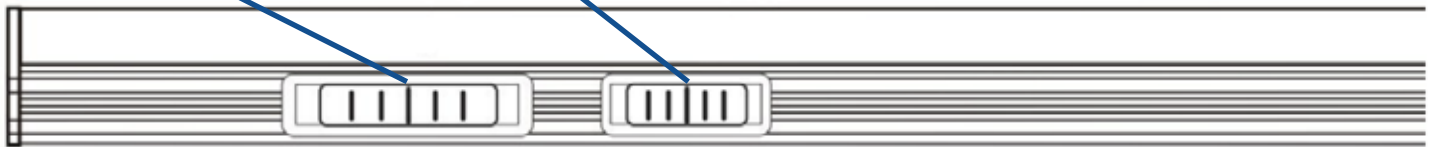

SLIMLINK LED LINKABLE LINEAR FIXTURE



ACCESSORIES - INCLUDED WITH 4FT SLIM FIXTURE:



6ft On/Off Cable



Single-end Cable



Double-end Cable

MOUNTING ACCESSORIES - SOLD SEPARATELY



Magnet Clips

ZL-SLIM-MC-MAG



Mounting Clips - No Magnets

ZL-SLIM-MC-NM



Coupling Connector

ZL-SLIM-BC

