

# AREA LIGHT – WATTAGE AND CCT SELECTABLE – MK SERIES



### APPLICATIONS

- Entryways
- Athletic facilities
- Shopping areas
- Parking lots and structures
- Storage areas
- Walkways



## PRODUCT SPECIFICATIONS

<b>WATTAGES</b>	100W, 150W, 200W selectable 250W, 280W, 320W selectable
<b>COLOR TEMPS</b>	30K, 40K, 50K selectable
<b>EFFICACY</b>	30K- 130 lm/W; 40K- 150 lm/W; 50K- 140 lm/W
<b>LUMENS @ 40K</b>	100/150/200W- 28,937 250/280/320W- 47,120
<b>INPUT VOLTAGE</b>	120/277VAC
<b>CRI</b>	>70
<b>DIMMING</b>	0-10V
<b>LED LIFESPAN (L70)</b>	50,000 hours
<b>DIMENSIONS</b>	100/150/200W- 18.9" x 12" x 2.9" 250/280/320W- 22" x 14.3" x 2.9"
<b>WORKING TEMP</b>	-4 to 104F
<b>MOUNTING - CHOICE OF ONE INCLUDED</b>	Slip Fitter; Universal Direct; Trunion
<b>LENS OPTIONS</b>	T3=IES Type III (Standard); T4=IES Type IV; T5=IES Type V
<b>MOTION SENSOR</b>	Optional - Microwave Motion Sensor, PIR Sensor or Bi-Level Dim Dusk/Dawn, both (w/ Remote Sold Separately), or Microwave Sensor (Bluetooth)
<b>RATED</b>	IP65
<b>LISTED</b>	UL
<b>WARRANTY</b>	5 year

## PRODUCT BUILDER ex: ZL-AREA-100-150-200-CCT-120/277V-PC-BR-A-MK

PRODUCT #	WATTAGE	COLOR TEMP	VOLTAGE	PHOTO CONTROL (choice of (1) included)	COLOR	DISTRIBUTION TYPE	MOUNTING (choice of (1) included)	SERIES
ZL-AREA		CCT	120/277V		BR			MK
	100-150-200 250-280-320			SC=Shorting cap included PC=Photocontrol included		(Standard/Included) T3=IES Type III (Special Order/Optional) T4=IES Type IV T5=IES Type V	A=Slip Fitter B=Universal Direct C=Trunion	



# AREA LIGHT – WATTAGE AND CCT SELECTABLE – MK SERIES

## OPTIONS

**A = Slip Fitter**



ZL-BRACKET-TYPE-A-MK

**B = Universal Direct**



ZL-BRACKET-TYPE-B-MK

**C = Trunion**



ZL-BRACKET-TYPE-C-MK



**Shorting Cap**  
ZL-SC




**Photocell**  
ZL-PC

## ACCESSORIES

### Microwave Motion Sensor



Part Number: ZL-MV-SENSOR-HD07VR-MH



Power Supply	10-15VDC, <30mA
Dim Control Output	DIM 0-10V
Mounting Height	12m/39ft Max.
Detection Distance	≥3m/9ft
Operating Temperature	-40°C-60°C
IP Rating	IP65

### HD07VR-PH 12VDC PIR Motion Sensor



Part Number: ZL-MS-SENSOR-HD07VR-PH

Power Supply	10-15VDC
Dim Control Output	DIM 0-10V
Mounting Height	12m/39ft Max.
Detection Distance	≥3m/9ft
Operating Temperature	-25°C~+60°C
IP Rating	IP65



Remote Control  
Part Number:  
ZL-REMOTE-HD05R  
(Sold Separately)



### Bi-Level Dim Dusk/Dawn Microwave Sensor



Part Number: ZL-MV-SENSOR-HD07VR-MH-B



Power Supply	10-15VDC
Dim Control Output	DIM 0-10V
Mounting Height	15m/49.21ft Max.
Detection Distance	≥3m/9ft
Operating Temperature	-25°C~+60°C
IP Rating	IP65

Consult factory for more details.



#### WARNING

1. The sensor should be installed by qualified electrician and ensure power is OFF before installation.
2. Please read the instruction carefully before using the product and keep it well for other users to read any time.
3. We reserve the right to modify any incorrect text, image and technical parameters.
4. Any unauthorized modification is forbidden. Otherwise all guarantees will be immediately invalid.
5. Product could be optimized without prior notice.



# AREA LIGHT – WATTAGE AND CCT SELECTABLE – MK SERIES

## AVAILABLE OPTICS

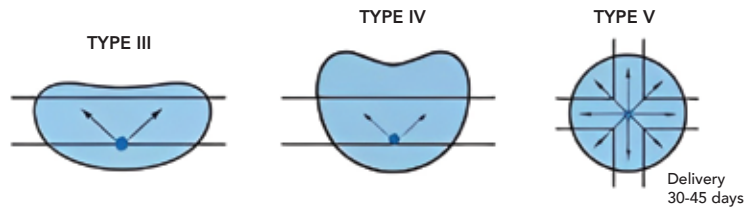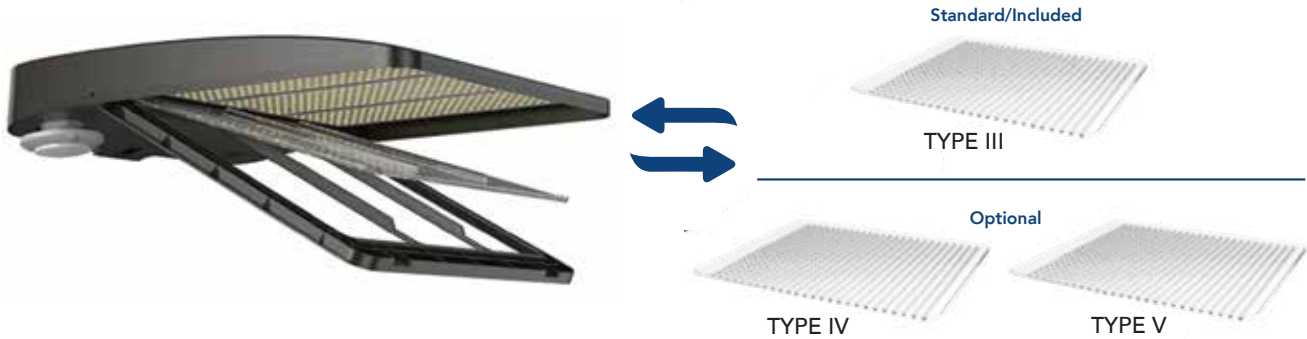

## DIMENSIONS

