

BLEND LED WATTAGE SELECTABLE - COLOR BLEND SELECTABLE HIGH BAY



30/40K or 30/50K

Blended LED alternating
Chip Placement: A technology
for more uniform and enhanced
color rendering.

3000K 5000K 4000K



Black Housing



White Housing



Silver Housing



APPLICATIONS

- Retail
- Offices
- Educational Institutions
- Big Box Stores
- Supermarkets
- Distribution and Convention Centers



Color Temp:
30/40K Blend
30/50K Blend



Wattage:
60/80/100/120W
selectable



Choice of aluminum or polycarbonate reflector.

PRODUCT SPECIFICATIONS

WATTAGES	60/80/100/120W selectable
COLOR TEMPS ZBLEND	30/40K (35K equivalent) or 30/50K (40K equivalent) (Toggle Switch)
EFFICACY	160 lm/W
LUMENS	60W- 9,600; 80W- 12,800; 100W- 16,000; 120W- 19,200
INPUT VOLTAGE	120/277V
CRI	80, 90 Special Order
AMBIENT TEMP	-40°C to 50°C; -40°F to 122°F
BEAM ANGLE	90°
DIMMING	0-10V
LED LIFESPAN (L70)	50,000 hours
REFLECTOR	Choice of Aluminum or Polycarbonate
FIXTURE HOUSING	White, Black or Silver
RATED	IP65
LISTED	UL
WARRANTY	5 year

PRODUCT BUILDER

ex: ZL-HB-60/80/100/120W-ZBLEND-D-W-P-80

TYPE	WATTAGE	COLOR TEMP	DIMMING	HOUSING	REFLECTOR	CRI
ZL-HB	60/80/100/120W	ZBLEND	D			
				W=White B=Black S=Silver	P=Polycarbonate A=Aluminum	80=Blank (Standard) 90=Special Order



The Ultimate Evolution
in LED Lighting with
True Color Technology

BLEND LED WATTAGE SELECTABLE - COLOR BLEND SELECTABLE HIGH BAY

OPTIONS



YOKE BRACKET

ZL-YOKE-BRACKET-100W-MK

ZL-YOKE-BRACKET-150W-MK

ZL-YOKE-BRACKET-240W-MK



SAFETY ROPE

ZL-SAFETY-ROPE-MK



EMERGENCY DRIVER

ZL-EM-KIT-100/240W-MK



REFLECTOR OPTIONS - 22 INCHES





ALUMINUM REFLECTOR



PC REFLECTOR

DIMENSIONS

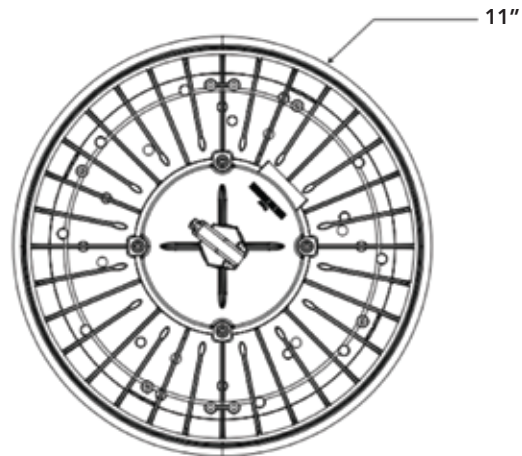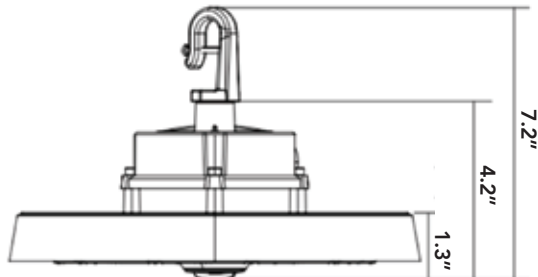

The Ultimate Evolution
in LED Lighting with
True Color Technology