


SURFACE MOUNT COVERED CIRCLINE LED FIXTURE

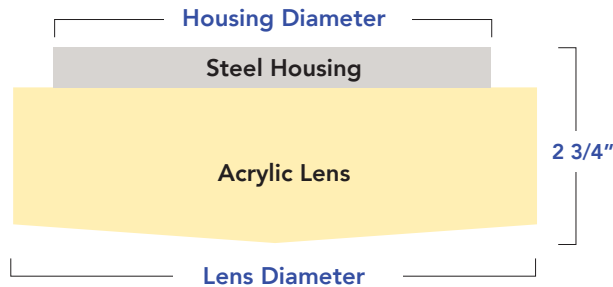

Size	Housing Diameter	Lens Diameter	Max Weight
22	10 1/8"	11"	4 lbs
32	12 3/4"	14"	9 lbs
54			
40	17"	19"	13 lbs
72			

APPLICATIONS

- Commercial and residential areas
- Restrooms
- Closets
- Hallways
- Storage areas

PRODUCT SPECIFICATIONS

WATTAGES (SELECTABLE)	20W- 13.5W, 17W, 20W 28W- 21W, 28W
COLOR TEMP (SELECTABLE)	30K, 35K, 40K, 50K
EFFICACY	20W- 160 lm/W; 28W- 150 lm/W
LUMENS	13.5W- 2,150; 17W- 2,700; 20W- 3,200; 21W- 3,150; 28W- 4,200
INPUT VOLTAGE	120V, 120/277V
CRI	80
DIMMING	0-10V low voltage
EMERGENCY BATTERY	4W Integrated
LISTED	UL
WARRANTY	5 year

CONSTRUCTION:

This unit is designed from heavy gauge die formed steel and is finished in baked white enamel or polyester powder coating for maximum durability and reflectivity.

MOUNTING:

Units are equipped with knockouts for junction box or direct surface mounting. Maximum weight 4 lbs/11", 9 lbs/14"

PRODUCT BUILDER

ex: ZL-BUT-22-1-20W-CCT-BK

TYPE	SIZE	POWER	WATTAGE (SELECTABLE)	COLOR (SELECTABLE)	
ZL-BUT	-	-	-	CCT	- BK
	22 32 40 54 72	1=120V 2=120/277V	20W=13.5W, 17W, 20W 28W=21W, 28W	CCT=30K, 35K, 40K, 50K	

