

LED CORN LAMP WITH WATTAGE AND CCT SELECTABLE SENSOR READY - GK



Sensor Ready Port



IP64



APPLICATIONS

- Post tops
- Wall packs
- Shoeboxes
- Area lights
- Residential recessed cans

Suitable for enclosed fixtures in many commercial, institutional and educational applications.


PRODUCT SPECIFICATIONS

WATTAGES	54W, 45W, 36W selectable 120W, 100W, 80W selectable
COLOR TEMPS	30K, 40K, 50K selectable
EFFICACY	135 lm/W
LUMENS	54W- 7,290; 45W- 6,075; 36W- 4,860; 120W- 16,200; 100W- 13,500; 80W- 10,800
INPUT VOLTAGE	120/277V
CRI	>80
OPERATING TEMP	-22° - 140°F
BASE TYPE	54/45/36W- E26 120/100/80W- EX39
DIMENSIONS	54/45/36W- 9.05" x 3.34" 120/100/80W- 11.25" x 5.11"
HID EQUIV.	54/45/36W- 120-175W 120/100/80W- 200-400W
SENSORS	Photocell Optional
RATED	IP64
LISTED	UL
WARRANTY	5 year

PART NUMBERS

C-E26-36/45/54W-IP64-CCT-GK

C-EX39-80/100/120W-IP64-CCT-GK



OPTIONAL SENSORS

PHOTOCELL SENSOR

Photocell Sensors provide light from dusk to dawn via settings.



- Part Number: ZL-PHOTOCELL-SENSOR-3.5MM-PLUG
- Voltage: 15VDC
- Output Voltage: 0-10V
- Current: 20mA
- Hold Time: 1 min, 5 hours, 8 houes
- Rated: IP20
- Warranty: 5 year

PHOTOCELL WITH PIR SENSOR

Photocell with PIR Sensor is triggered when it detects movement in front of it.




- Part Number: ZL-PIR-SENSOR-3.5MM-PLUG
- Voltage: 15VDC
- Output Voltage: 0-10V
- Current: 20mA
- Sensing Angle: 120°
- Detection Range: Approximately 32 ft.
- Time Options: 10 sec, 90 sec, 5 min, 10 min
- Rated: IP20
- Warranty: 5 year

LED CORN LAMP WITH WATTAGE AND CCT SELECTABLE SENSOR READY - GK

PHOTOMETRICS

54W

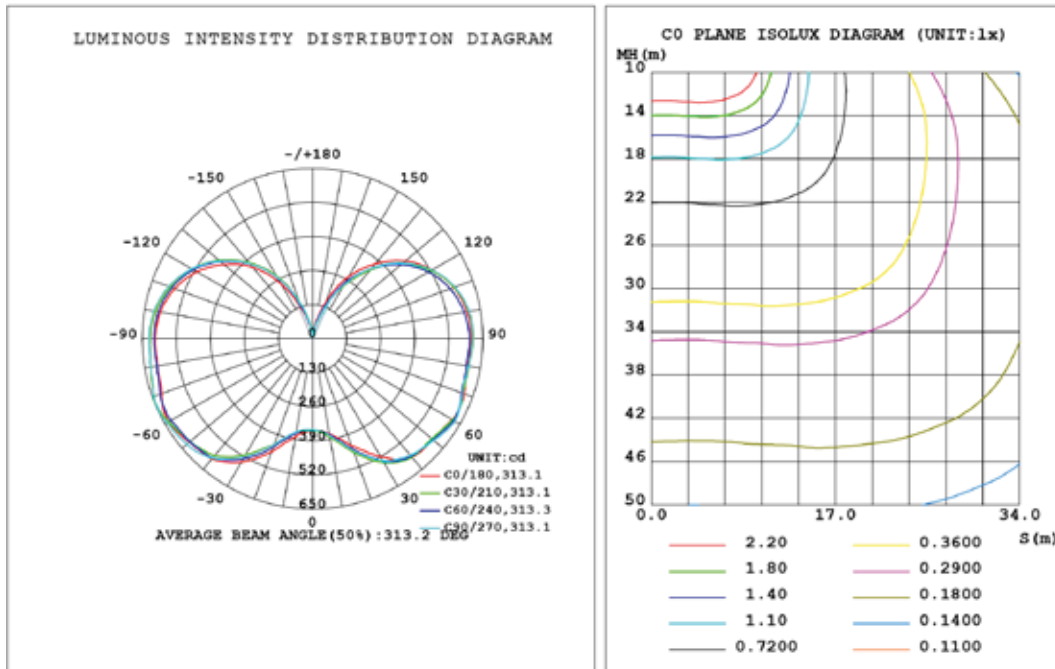

120W

