

HIGH EFFICIENCY LED WATTAGE SELECTABLE CORN LAMPS




RETROFIT EXISTING FIXTURES



APPLICATIONS

- Warehouse and manufacturing factories
- Outdoor post tops
- Institutional and educational facilities
- Wall Packs and Flood Lights

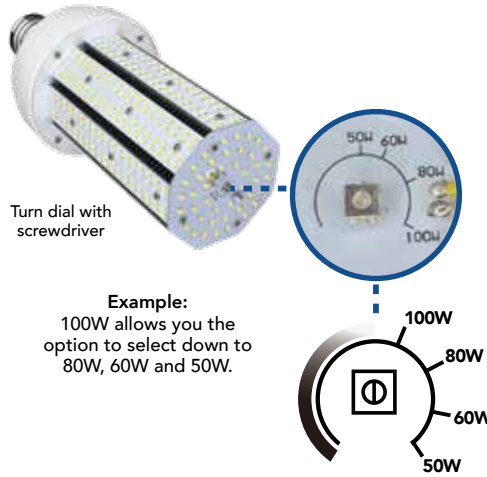

PRODUCT SPECIFICATIONS

180 lm/W is based on 50K, 165 and 180 lm/W may apply to other Kelvins

WATTAGES (SELECTABLE)	40/30/25/15W; 60/50/40/30W; 100/80/60/50W
COLOR TEMPS	30K, 40K, 50K (Stock) 57K, 65K (Special Order)
EFFICACY	165 lm/W; 180 lm/W (100/80/60/50W)
LUMENS	15W- 2,475; 25W- 4,125; 30W- 4,950; 40W- 6,600; 50W- 8,250; 60W- 9,900; 80W- 13,200; 100W- 18,000
INPUT VOLTAGE	120/277V, 480V
CRI	>80Ra
BASE TYPE	E26, EX39
OPERATING TEMP	-20° to 50°C; -4° to 122°F
LED LIFESPAN	50,000 hours
BEAM ANGLE	360 degrees
SUGGESTED HID EQUIV.	15W+25W- 50-100W; 30W- 150-200W; 40W- 175-200W; 50W- 175-250W; 60W- 200-275W; 80W- 250-350W; 100W- 400-500W
DIMENSIONS	40W: E26- 4.17" x 7.87"; EX39- 4.17" x 8.27" 60W: E26- 4.17" x 8.27"; EX39- 4.17" x 8.31" 100W: EX39- 4.17" x 10.24"
LISTED	ETL, DLC (EX39 Only)
RATED	IP20
WARRANTY	5 year

PRODUCT BUILDER - 165 lm/W

ex: C-E26-40/30/25/15W-50K-HE-480V-D-2

TYPE	BASE	WATTAGE	COLOR TEMP	PRODUCT	VOLTAGE	VERSION
C				HE		D-2
	E26=Medium (Special Order 100W) EX39=Mogul Base	40/30/25/15W 60/50/40/30W 100/80/60/50W	Stock 30K=3000K 40K=4000K 50K=5000K Special Order 57K=5700K 65K=6500K		Blank=120/277V 480V=480V	

PRODUCT BUILDER - 180 lm/W

ex: C-EX39-100/80/60/50W-50K-HE-480V-D-2


TYPE	BASE	WATTAGE	COLOR TEMP	PRODUCT	VOLTAGE	VERSION
C	EX39	100/80/60/50W		HE		D-2
	EX39=Mogul Base	100/80/60/50W	50K=5000K Special Order 57K=5700K 65K=6500K		Blank=120/277V 480V=480V	




HIGH EFFICIENCY LED WATTAGE SELECTABLE CORN LAMPS



PHOTOMETRICS – 40W

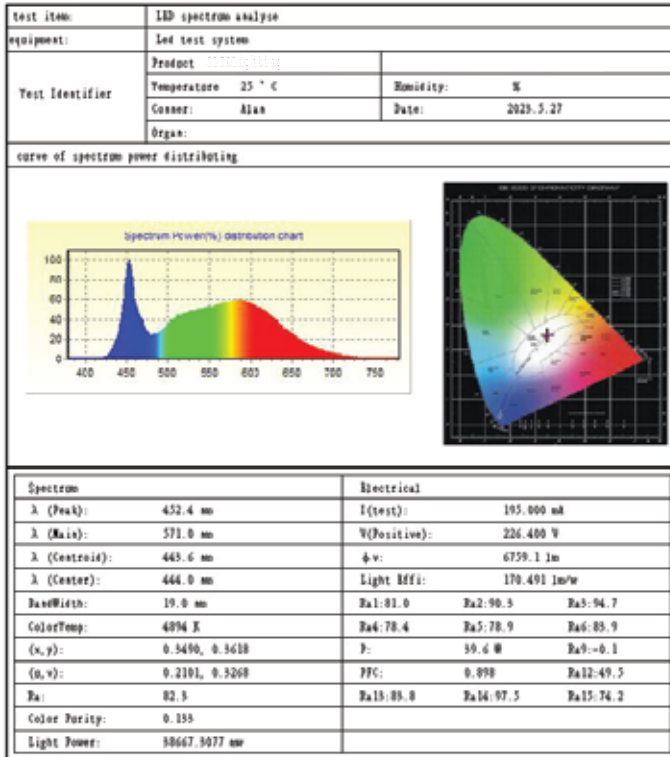

PHOTOMETRICS – 60W

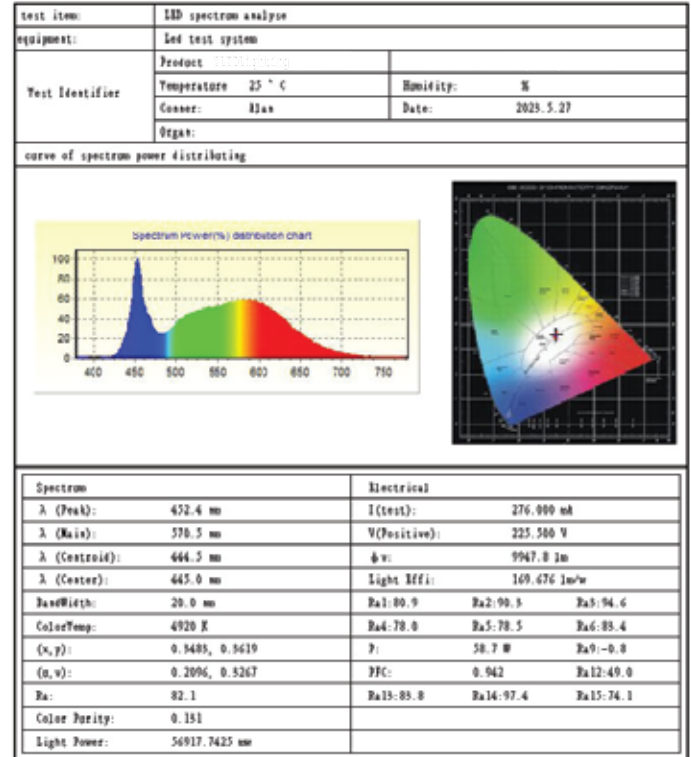

PHOTOMETRICS – 100W

