

LINEAR HIGH BAY - WATTAGE SELECTABLE



PRODUCT SPECIFICATIONS

WATTAGES	90, 110, 120W selectable
COLOR TEMPS	50K
EFFICACY	160 lm/W
LUMENS	90W- 14,400; 110W- 17,600; 120W- 19,200
INPUT VOLTAGE	120/277V
CRI	>80
BEAM ANGLE	100°
DIMMABLE	0-10V
LED LIFESPAN (L70)	50,000 hours
SENSOR READY	Yes - Sold Separately with Optional Remote also Sold Separately
DIMENSIONS	1x2- 16.54" x 14.17" x 1.97"
RATED	IP20
LISTED	UL
WARRANTY	5 year



IP20



APPLICATIONS

- Supermarkets
- Cafeterias
- Gymnasiums
- Recreation centers
- Large loft spaces
- Educational facilities
- Convention centers
- Airports/aircraft hangars
- Parking garages
- High-ceiling offices

PART NUMBER

ZL-HB-1X2-120-110-90-50K-120/277V




LINEAR HIGH BAY - WATTAGE SELECTABLE

OPTIONS



Part Number with 90° Angle:
ZL-MV-SENSOR-HB-ARM-HD07R

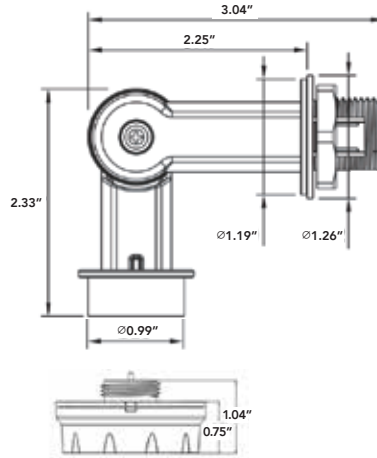

Part Number Remote Control:
ZL-REMOTE-HD05R
(Sold Separately)

SPECIFICATIONS

Power Supply	10-15VDC, <30mA
Dim Control Output	DIM 0-10V
Mounting Height	12m/39ft Max.
Detection Distance	≥3m/9ft
Operating Temperature	-40°C-60°C
IP Rating	IP65

WARNING

1. The sensor should be installed by qualified electrician and ensure power is OFF before installation.
2. Please read the instruction carefully before using the product and keep it well for other users to read any time.
3. We reserve the right to modify any incorrect text, image and technical parameters.
4. Any unauthorized modification is forbidden. Otherwise all guarantees will be immediately invalid.
5. Product could be optimized without prior notice.

PHOTOMETRICS

