

HIGH OUTPUT LED PAR LAMPS



PAR30



PAR30



PAR38



PAR30 /
PAR38



PAR38



APPLICATIONS

- Foyer
- Houses of worship
- Vestibules
- Artwork lighting
- Hospitality
- Mood lighting
- High ceilings



PRODUCT SPECIFICATIONS

WATTAGES	PAR30: 35W PAR38: 35W, 55W
COLOR TEMPS	27K, 30K, 35K, 40K, 45K, 50K, 55K, 60K, 65K
INPUT VOLTAGE	120V, 120-277V
LUMENS	PAR30: 35W- 2,800 - 3,100 PAR38: 35W- 3,300-3,500 PAR38: 55W- 4,600 - 5,400
LED CHIP	Osram
CRI	85
HOUSING	White, Optional Black
BASE TYPE	E26
BEAM SPREAD	15, 25, 45, 60, 80
LED LIFESPAN (L70)	50,000 hours
DIMENSIONS (WxH)	PAR30: 3.74" x 4.72" PAR38: 4.72" x 5.23", 4.72" x 5.39"
RATED	IP20
LISTED	ETL
WARRANTY	5 year

Micro Fan for active cooling

PRODUCT BUILDER


ex: PAR-30V-HO-E26-35W-40K-120V-15-DIM-WH

PRODUCT #	BASE TYPE	WATTAGE	COLOR TEMP	VOLTAGE INPUT	BEAM SPREAD	DIMMING	HOUSING
	- E26 -	-	- -	-	-	-	
PAR30V-HO PAR38V-HO	PAR30 PAR38	35=35W 35=35W 55=55W	27K 30K 35K 40K 45K 50K 55K 60K 65K	120V 120-277V	15 25 45 60 80	DIM - Only 120V is dimmable	WH=White BK=Black (Optional)




HIGH OUTPUT LED PAR LAMPS

35W LED PAR30

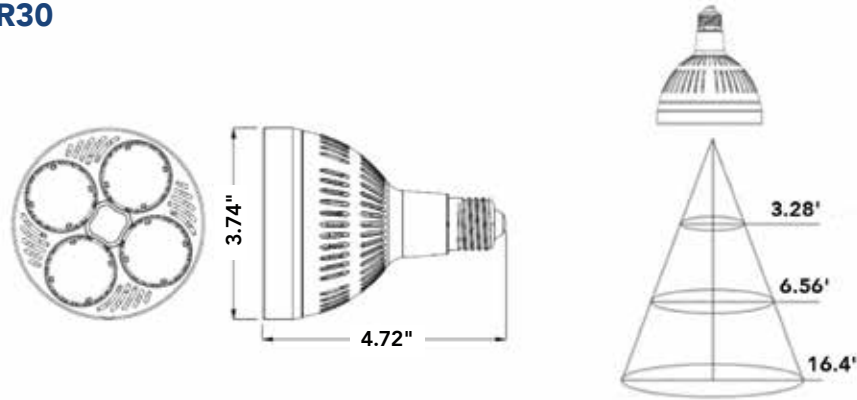

Height / Angle	15°		25°		45°		80°	
	Foot Candles	Spot Size	Foot Candles	Spot Size	Foot Candles	Spot Size	Foot Candles	Spot Size
3.28' (1 Meter)	3732	0.66'	3064	0.72'	1330	1.25'	393	2.07'
6.56' (2 Meter)	933	1.35'	765	1.48'	322	2.49'	98	4.13'
9.84' (3 Meter)	414	2.00'	340	2.20'	147	3.71'	43	6.20'
13.12' (4 Meter)	233	2.69'	57	2.85'	49	5.22'	19	8.96'
16.4' (5 Meter)	149	3.35'	122	3.67'	53	6.20'	15	10.33'

55W LED PAR38

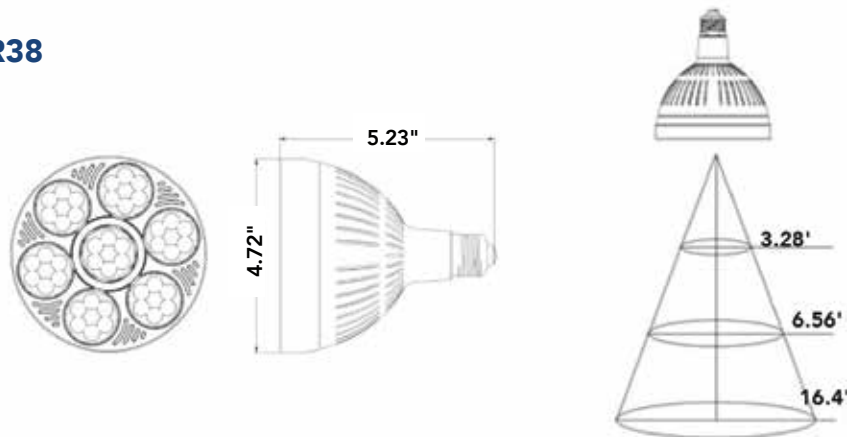

Height / Angle	15°		25°		45°		80°	
	Foot Candles	Spot Size	Foot Candles	Spot Size	Foot Candles	Spot Size	Foot Candles	Spot Size
3.28' (1 Meter)	3623	0.84'	2263	1.05'	1837	1.12'	400	3.44'
6.56' (2 Meter)	905	1.68'	574	2.10'	459	3.6'	114	6.33'
9.84' (3 Meter)	402	5.53'	251	3.31'	204	5.5'	44	9.45'
13.12' (4 Meter)	144	3.37'	143	4.1'	89	7.2'	28	12.7'
16.4' (5 Meter)	100	4.21'	96	5.12'	59	9.1'	19	15.92'

