


2', 4', 8' SEAMLESS CONNECTING LED LINEAR FIXTURE WITH DIRECT AND INDIRECT ILLUMINATION 3 WATTAGE AND 4 CCT SELECTABLE UP DOWN LIGHTING



Wattage and CCT Selectable

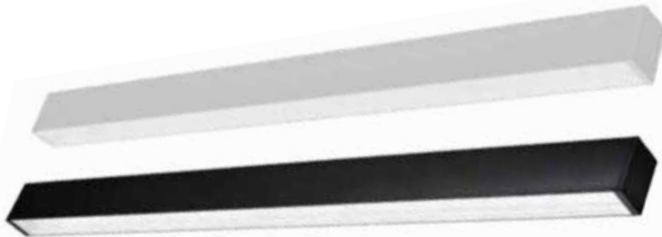

PRODUCT SPECIFICATIONS

WATTAGES SELECTABLE	2ft- 15W/20W/25W 4ft- 40W/45W/50W 8ft- 60W/70W/80W
COLOR TEMPS SELECTABLE	35K, 40K, 50K, 65K
EFFICACY	130 lm/W
LUMENS	15W- 1,950; 20W- 2,600; 25W- 3,250; 40W- 5,200; 45W- 5,850; 50W- 6,500; 60W- 7,800; 70W- 9,100; 80W- 10,400
INPUT VOLTAGE	120/277V
BEAM ANGLE	110°
CRI	Ra 80
POWER CORD	4 ft. Power Cord Standard 6 ft. Special Order
LENS	Frosted
SENSOR	Optional
FIXTURE COLOR	Black or White
DIMMING	0-10V
LIFESPAN (L70)	50,000 hours
AIRCRAFT MOUNTING CABLE	2 (3) ft. and 2 (5) ft. Included Contact Sales for Custom Lengths
EMERGENCY BATTERY	Optional
LIGHTING DIRECTION	Up 10-30%; Down 100-70%
FIXTURE CONNECTIONS	L/ T/ X/ Y/ 120° connectors available. Interlocking adapter integrated into fixture for linear runs.
MOUNTING OPTIONS	Pendant, Wall, Surface or Recessed
DIMENSIONS (LxWxH)	2ft- 24.5" x 2.2" x 3.2" 4ft- 48.1" x 2.2" x 3.2" 8ft- 95.7" x 2.2" x 3.2"
WARRANTY	5 year

Seamless Interlocking integrated into fixture for linear applications.



APPLICATIONS

- Schools
- Hospitals
- Supermarket
- Offices
- Warehouses
- Retail
- Hospitality



PRODUCT BUILDER

ex: ZL-ALL-15-20-25W-4CCT-BL-IG

TYPE	SIZE & WATTAGE	COLOR TEMP	COLOR OPTION	OPTIONAL
ZL-ALL	-	4CCT	-	IG
	2ft- 15-20-25W 4ft- 40-45-50W 8ft- 60-70-80W		BL=Black WH=White	Blank=None EM=Emergency Battery SC=Sensor Connector



2', 4', 8' SEAMLESS CONNECTING LED LINEAR FIXTURE WITH DIRECT AND INDIRECT ILLUMINATION 3 WATTAGE AND 4 CCT SELECTABLE UP DOWN LIGHTING

Max. No.* of each Power feed

Size / Power	AC 120V	AC 277V
2FT / 25W	19 PCS	38 PCS
4FT / 50W	9 PCS	19 PCS
8FT / 80W	6 PCS	12 PCS

CCT Tunable

2FT

Watt Tunable

4FT


Watt Tunable

8FT


Watt Tunable

Light Direction


Adjust up and
down lighting ratio

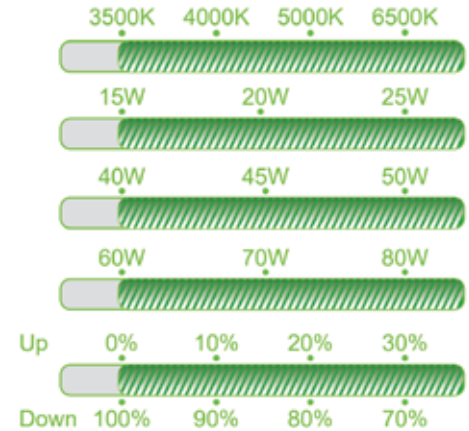

DIMENSIONS

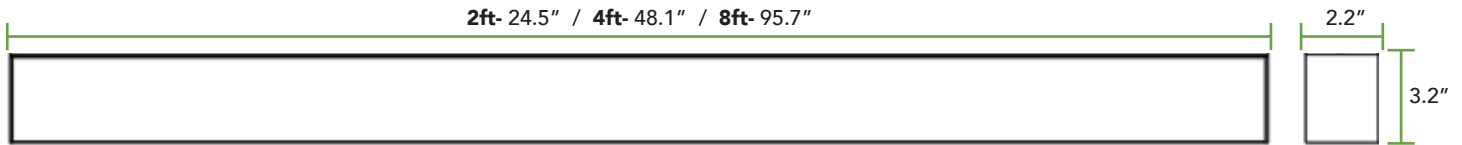

MOUNTING

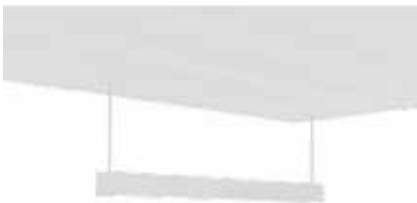

Suspended Mount



Surface Mount



Wall Mount




Recessed Mount



2', 4', 8' SEAMLESS CONNECTING LED LINEAR FIXTURE WITH DIRECT AND INDIRECT ILLUMINATION 3 WATTAGE AND 4 CCT SELECTABLE UP DOWN LIGHTING

ADAPTING CONNECTORS


L Connector

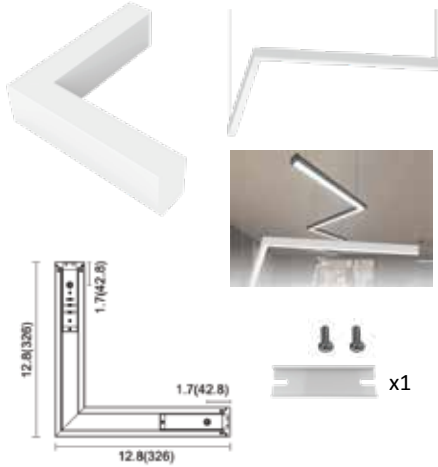


T Connector




X Connector

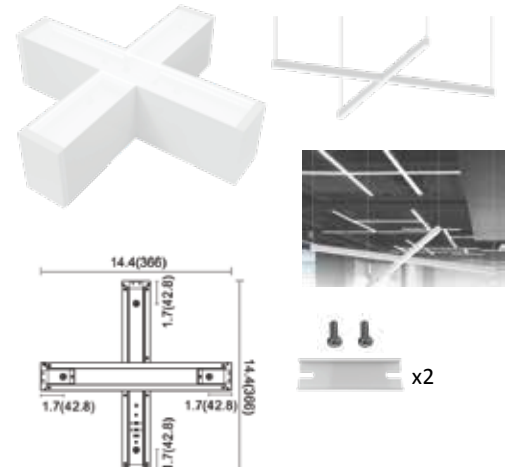

Y Connector

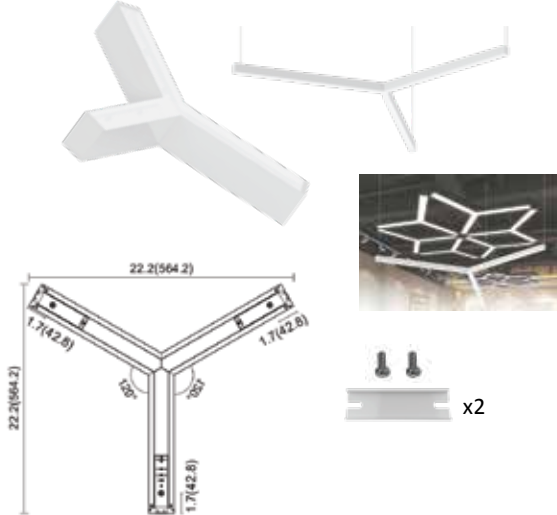

120° Connector

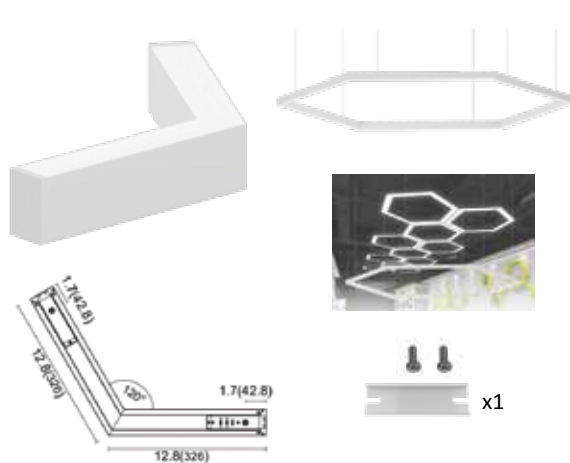

TYPE

ZL-ALL-ADAPTER

CONNECTOR PART #

IG

L=L Connector
T=T Connector
X=X Connector
Y=Y Connector
120=120 Connector

Fast and Seamless Connection

Screw-free to remove end-cover.
Tool-free press lock connection.




2', 4', 8' SEAMLESS CONNECTING LED LINEAR FIXTURE WITH DIRECT AND INDIRECT ILLUMINATION 3 WATTAGE AND 4 CCT SELECTABLE UP DOWN LIGHTING

Suspension Mount Kit

Standard equipment. Contact Sales for alternate options.

Aircraft Cable Mounting Wire

2 - 3 ft.
2 - 5 ft.

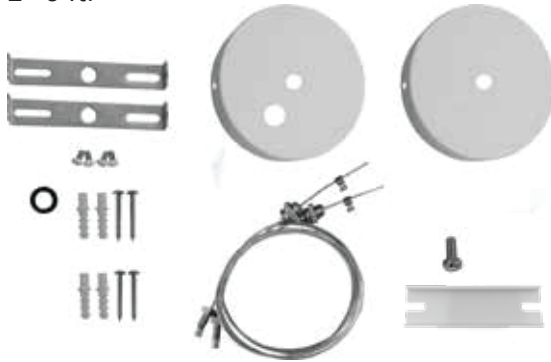

Power Cord


4 ft. Cord Standard
6 ft. Special Order




Additional Kits available

ZL-ALL-SMK-IG

Sensor Connector



AC sensor installation canopy kit (sensor installed)



EMERGENCY BATTERY



- **MODEL:** 15W
- **INPUT VOLTAGE:** 120/277V
- **OUTPUT VOLTAGE:** 170VDC
- **EMERGENCY POWER:** 15W
- **EMERGENCY TIME:** 90 mins
- **CHARGING TIME:** 24 hours
- **DIMENSIONS:** 13.77" x 1.97" x 0.94"
- **AMBIENT TEMPERATURE:** 32-122F
- **BATTERY:** Lithium
- **WARRANTY:** 5 years

DIMENSIONS:

