

4", 6" AND 8" LED DOWNLIGHTS WHITE BAFFLE WATTAGE AND CCT SELECTABLE - FX SERIES



PRODUCT SPECIFICATIONS

WATTAGES (SELECTABLE)	4"- 9/13/18W 6"- 13/19/27W 8"- 18/27/36W
COLOR TEMPERATURE (SELECTABLE)	27/30/35/40/50K
INPUT VOLTAGE	120/277V
EFFICACY	110 lm/W
LUMENS	9W- 1,000; 13W- 1,500; 18W- 2,000; 19W- 2,090; 27W- 2,970; 36W- 3,960
CRI	80-90
DIMENSIONS	4"- 5.91" x 4.02" 6"- 8.27" x 4.41" 8"- 10.24" x 4.76"
BEAM ANGLE	120 degrees
DIMMING	0-10V
LED LIFESPAN (L70)	50,000 hours
EMERGENCY BATTERY BACKUP	Optional
HOUSING	White Baffle
TRIM	White
RATED	Damp Location
LISTED	ETL
WARRANTY	5 year

PART NUMBERS

ZL-DL-4INCH-PA-CCT-WH-FX-D*

ZL-DL-6INCH-PA-CCT-WH-FX-D

ZL-DL-8INCH-PA-CCT-WH-FX-D

* Special Order



APPLICATIONS

- Commercial
- Office
- Education

Selectable CCT

 2700K
 3000K
 3500K
 4000K
 5000K



Selectable Wattage

4":	6":	8":
9W	13W	18W
13W	19W	27W
18W	27W	36W




4", 6" AND 8" LED DOWNLIGHTS WHITE BAFFLE WATTAGE AND CCT SELECTABLE - FX SERIES

DIMENSIONS

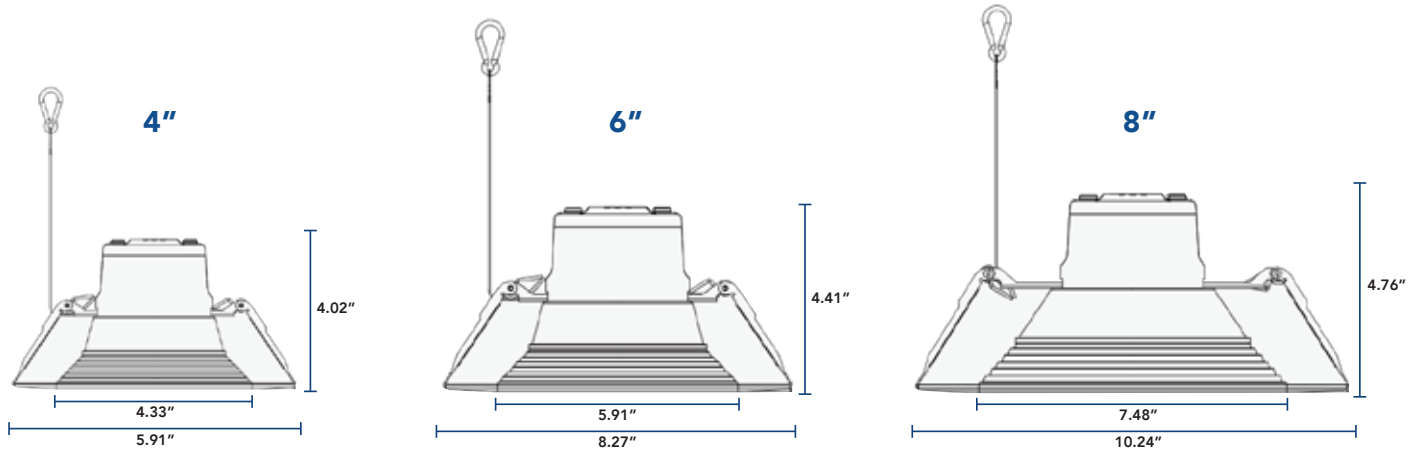


PHOTOMETRICS

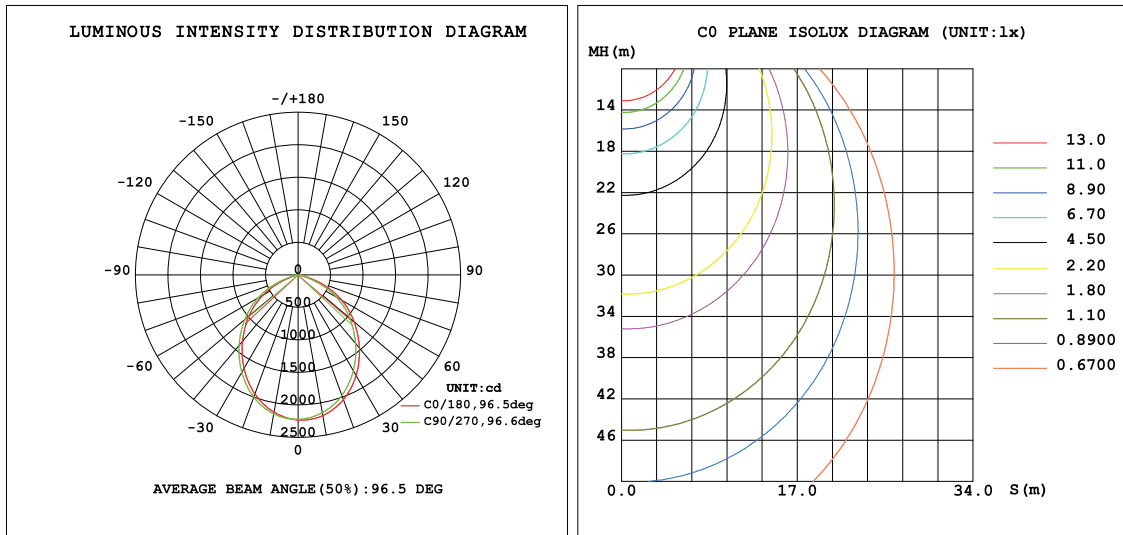

4", 6" AND 8" LED DOWNLIGHTS WHITE BAFFLE WATTAGE AND CCT SELECTABLE - FX SERIES

WIRING DIAGRAM

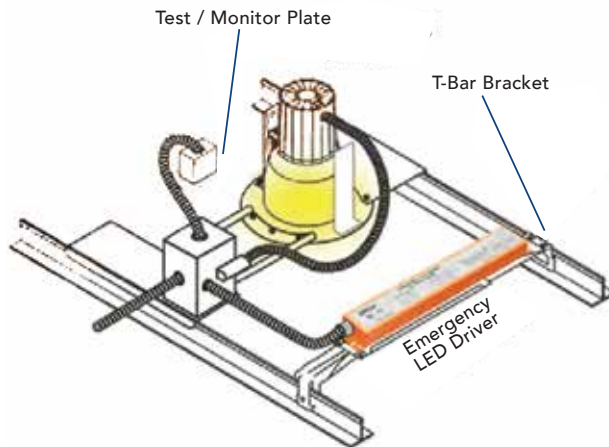

EM DRIVER PART #

BL-EMRG-FXT-8D-A

