

24V COB LED TAPE LIGHT



IP20

RGBW
SELECTABLE

PRODUCT SPECIFICATIONS

POWER	12W
COLOR TEMPERATURES	30K, 35K, 40K, 60K, RGBW
EFFICACY	3000K- 95 lm/W; 4000+6000K- 100 lm/W
LUMENS	3000K- 1,140; 4000+6000K- 1,200
INPUT VOLTAGE	24V
CRI	>90
ROLL LENGTH	32.8' L; .04" W
CUTTABLE INCREMENTS	1.97"
OPERATING TEMPERATURE	-20° to 45°C; -4° to 113°F
BEAM ANGLE	180°
LED QUANTITY	480/m
RATED	IP20
WARRANTY	3 year

PART NUMBERS


ZL-TAPE-COB-24V-60K-LO
 ZL-TAPE-COB-24V-40K-LO
 ZL-TAPE-COB-24V-35K-LO
 ZL-TAPE-COB-24V-30K-LO
 ZL-TAPE-COB-24V-RGBW40K-LO



APPLICATIONS


- Coves
- Architectural, Commercial, and residential accent designs
- Under Cabinets
- Displays
- Indirect Lighting Applications

DIMENSIONS

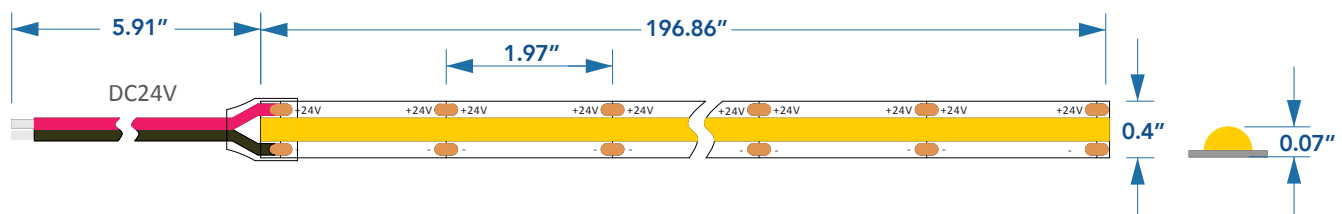

24V COB LED TAPE LIGHT


IP RATING




Waterproof Type	Photo	Size	IP Rate
Non-Waterproof		W 0.4" x H 0.07"	IP20

PRODUCT CONNECTION

1) Non-dimmable connection

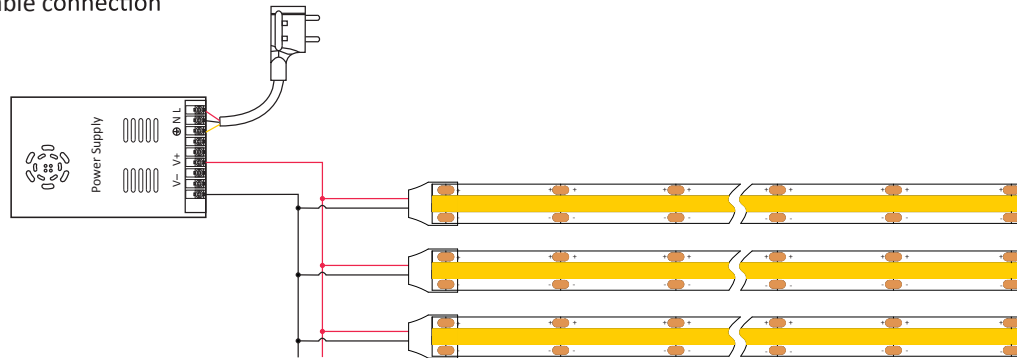


2) Dimmable connection

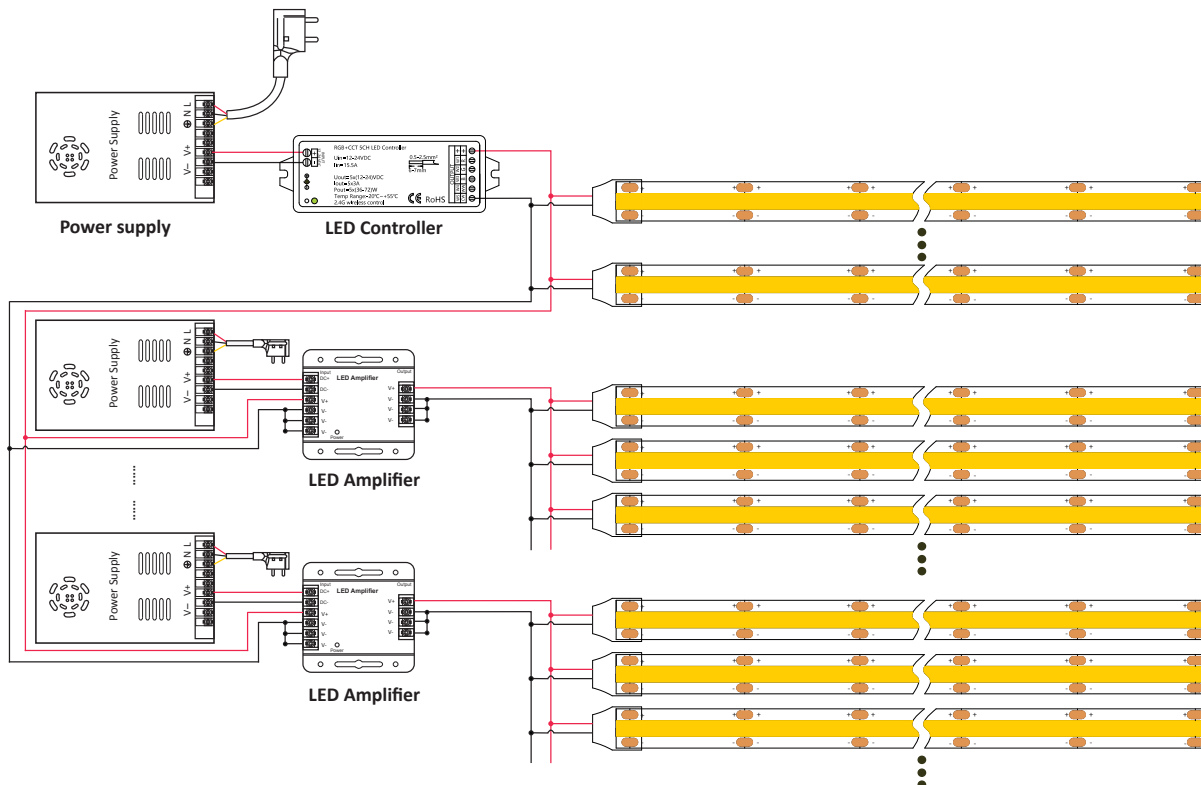


24V COB LED TAPE LIGHT


PRODUCT INSTALLATION

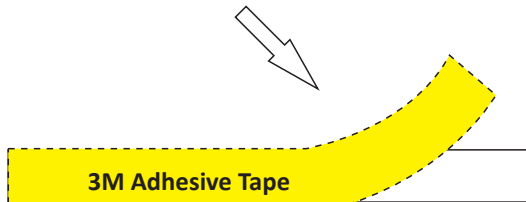

Peel off 3M tape

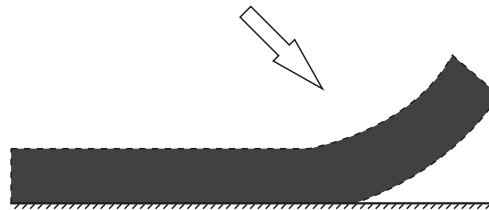

Stick the 3M Tape

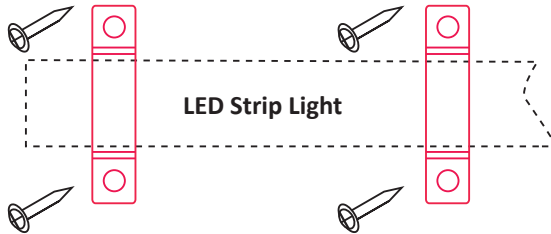


Install with Clips



Fix with Screw

ACCESSORIES

SHALLOW



ZL-MC-1506 (-C OR -F)
4' aluminum mounting channel,
Comes with 2 end caps and 2 mounting clips

DEEP



ZL-MC-1612 (-C OR -F)
4' aluminum mounting channel,
Comes with 2 end caps and 2 mounting clips

45 DEGREE



ZL-MC-1616 (-C OR -F)
4' aluminum mounting channel,
Comes with 2 end caps and 8 mounting clips



2W-PIGTAIL-M
2W-PIGTAIL-F



MTCLIPS-REEL
Mounting clips 10/pk



2W-JUNCTION-BLOCK
24V Terminal block
300W (12V MAX), 500W (24V MAX)



2W-JUMP, 4W-JUMP
2 Conductor jumper (18/2 AWG CL3R)
4 Conductor jumper (18/4 AWG CL3R)

Whether it's a specialized design, bespoke product, or a unique service, the team is here to help bring ideas to life.

Contact the factory today! (800) 679-9243, or your ZLEDLighting Rep

Let's collaborate and create something exceptional together. Reach out to us for more information or to discuss your project!



24V COB LED TAPE LIGHT

CONSTANT VOLTAGE TRIAC POWER SUPPLY

PART #	DESCRIPTION	INPUT & OUTPUT VOLTAGE
ZL-DRIVER-24V-48W-DIM	Dimmable, 30W: 6.5" (L) x 3.55" (W) x 1.54" (H)	120/277V, 24V
ZL-DRIVER-24V-60W-DIM	Dimmable, 60W 7.41" (L) x 3.55" (W) x 1.54" (H)	120/277V, 24V
ZL-DRIVER-24V-96W-DIM	Dimmable, 96W 8.67" (L) x 3.55" (W) x 1.54" (H)	120/277V, 24V
ZL-DRIVER-24V-120W-DIM	Dimmable, 120W 8.67" (L) x 3.55" (W) x 1.54" (H)	120/277V, 24V
ZL-DRIVER-24V-150W-DIM	Dimmable, 150W 10.24" (L) x 3.94" (W) x 1.74" (H)	120/277V, 24V
ZL-DRIVER-24V-192W-DIM	Dimmable, 192W 7.41" (L) x 4.75" (W) x 1.66" (H)	120/277V, 24V
ZL-DRIVER-24V-300W-DIM	Dimmable, 300W 12.45" (L) x 4.75" (W) x 1.66" (H)	120/277V, 24V

CONSTANT VOLTAGE COMPACT TRIAC POWER SUPPLY

PART #	DESCRIPTION	INPUT & OUTPUT VOLTAGE
ZL-DRIVER-PS-60W-12V	Dimmable, Compact, 60W 2.83" (L) x 1.53" (W) x 0.89" (H)	120/277V, 12V
ZL-DRIVER-PS-96W-24V	Dimmable, Compact, 96W 2.83" (L) x 1.53" (W) x 0.89" (H)	120/277V, 24V

5-IN-1, 0-10V CONSTANT VOLTAGE TRIAC POWER SUPPLY

PART #	DESCRIPTION	INPUT & OUTPUT VOLTAGE
ZL-DRIVER-24V-96W-5IN1	Phase Cut Dimming 0-10V, 96W 6.87" (L) x 3.75" (W) x 1.54" (H)	120/277V, 24V

