

AREA LIGHT – WATTAGE AND CCT SELECTABLE – MK SERIES



APPLICATIONS

- Entryways
- Athletic facilities
- Shopping areas
- Parking lots and structures
- Storage areas
- Walkways



PRODUCT SPECIFICATIONS

WATTAGES (SELECTABLE)	100W, 150W, 200W 250W, 280W, 320W
COLOR TEMPERATURE (SELECTABLE)	30K, 40K, 50K
EFFICACY	30K- 130 lm/W; 40K- 150 lm/W; 50K- 140 lm/W
LUMENS @ 40K	100/150/200W- 28,937 250/280/320W- 47,120
INPUT VOLTAGE	120/277VAC
CRI	>70
DIMMING	0-10V
LED LIFESPAN (L70)	50,000 hours
DIMENSIONS	100/150/200W- 18.9" x 12" x 2.9" 250/280/320W- 22" x 14.3" x 2.9"
WORKING TEMP	-20° to 40°C; -4° to 104°F
MOUNTING - CHOICE OF ONE INCLUDED	Slip Fitter; Universal Direct; Trunion
LENS OPTIONS	T3=IES Type III (Standard); T4=IES Type IV; T5=IES Type V
MOTION SENSOR	Optional - Microwave Motion Sensor, PIR Sensor or Bi-Level Dim Dusk/Dawn, both (w/ Remote Sold Separately), or Microwave Sensor (Bluetooth)
RATED	IP65
LISTED	UL
WARRANTY	5 year

PRODUCT BUILDER

ex: ZL-AREA-100-150-200-CCT-120/277V-PC-BR-A-MK

PRODUCT #	WATTAGE	COLOR TEMP	VOLTAGE	PHOTO CONTROL (choice of (1) included)	COLOR	LENS OPTIONS	MOUNTING (choice of (1) included)	SERIES
ZL-AREA		CCT	120/277V		BR			MK
	100-150-200 250-280-320			SC=Shorting cap PC=Photocontrol		(Standard/Included) T3=IES Type III (Special Order/Optional) T4=IES Type IV T5=IES Type V	A=Slip Fitter B=Universal Direct C=Trunion	




AREA LIGHT – WATTAGE AND CCT SELECTABLE – MK SERIES

OPTIONS

A = Slip Fitter


ZL-BRACKET-TYPE-A-MK

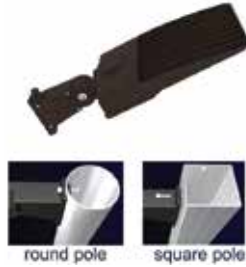B = Universal Direct


ZL-BRACKET-TYPE-B-MK

C = Trunion


ZL-BRACKET-TYPE-C-MK


Shorting Cap
 ZL-SC


Photocell
 ZL-PC

ACCESSORIES

Microwave Motion Sensor



Part Number: ZL-MV-SENSOR-HD07VR-MH



Power Supply	10-15VDC, <30mA
Dim Control Output	DIM 0-10V
Mounting Height	12m/39ft Max.
Detection Distance	≥3m/9ft
Operating Temperature	-40°C-60°C
IP Rating	IP65


Remote Control
 Part Number:
 ZL-REMOTE-HD05R
 (Sold Separately)

HD07VR-PH 12VDC PIR Motion Sensor



Part Number: ZL-MS-SENSOR-HD07VR-PH

Power Supply	10-15VDC
Dim Control Output	DIM 0-10V
Mounting Height	12m/39ft Max.
Detection Distance	≥3m/9ft
Operating Temperature	-25°C~+60°C
IP Rating	IP65

Bi-Level Dim Dusk/Dawn Microwave Sensor



Part Number: ZL-MV-SENSOR-HD07VR-MH-B



Power Supply	10-15VDC
Dim Control Output	DIM 0-10V
Mounting Height	15m/49.21ft Max.
Detection Distance	≥3m/9ft
Operating Temperature	-25°C~+60°C
IP Rating	IP65

Consult factory for more details.


WARNING

1. The sensor should be installed by qualified electrician and ensure power is OFF before installation.
2. Please read the instruction carefully before using the product and keep it well for other users to read any time.
3. We reserve the right to modify any incorrect text, image and technical parameters.
4. Any unauthorized modification is forbidden. Otherwise all guarantees will be immediately invalid.
5. Product could be optimized without prior notice.




AREA LIGHT – WATTAGE AND CCT SELECTABLE – MK SERIES

AVAILABLE OPTICS

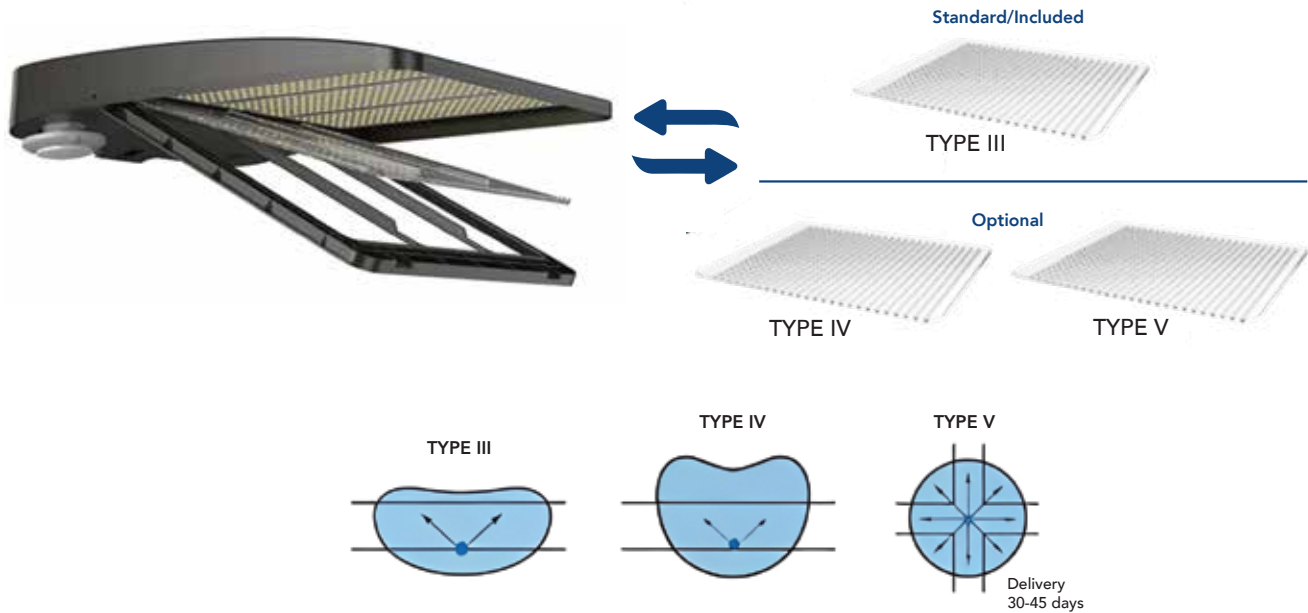

DIMENSIONS

100/150/200W: 2.9"
250/280/320W: 2.9"

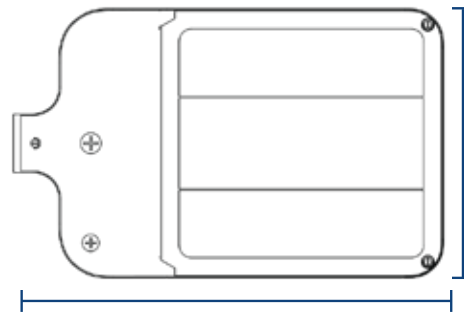

100/150/200W: 12"
250/280/320W: 14.3"

100/150/200W: 18.9"
250/280/320W: 22"

