


LED LONG TUBE FLUORESCENT REPLACEMENT PLUG-IN (FR-VERSION-TWO-SIDED-LIGHT)



2G11 Base

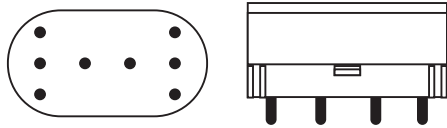

APPLICATIONS

- Long tube fluorescent replacement plug-in.
- Replacement for CFL PLL.


NOTE: CFL ballast must be bypassed.
2G11 base type.
Replacement for CFL PLL.
Instant on with no warm up.

PRODUCT SPECIFICATIONS


WATTAGES	9W, 15W, 18W, 23W
COLOR TEMPS	27K, 30K, 35K, 40K, 50K, 60K
DIMMING	Non-Dimming
LUMENS	9W- 960; 15W- 1,600; 18W- 1,920; 23W- 2,460
INPUT VOLTAGE	120/277V (NOTE: CFL ballast must be bypassed. 2G11 base type)
CRI	>80Ra
LED LIFESPAN (L70)	50,000 hours
DIMENSIONS	9W- 1.60" x 8.86" x 0.71" 15W- 1.60" x 12.60" x 0.71" 18W- 1.60" x 16.14" x 0.71" 23W- 1.60" x 21.00" x 0.71"
SUGGESTED HID EQUIV.	9W+15W- 26-32W 18W+23W- 42W
PF	>0.9
BEAM ANGLE	360°
BASE TYPE	2G11
LENS	Frosted
LISTED	UL
WARRANTY	5 year

PRODUCT BUILDER

ex: SP-2G11-9-27K-F-7R

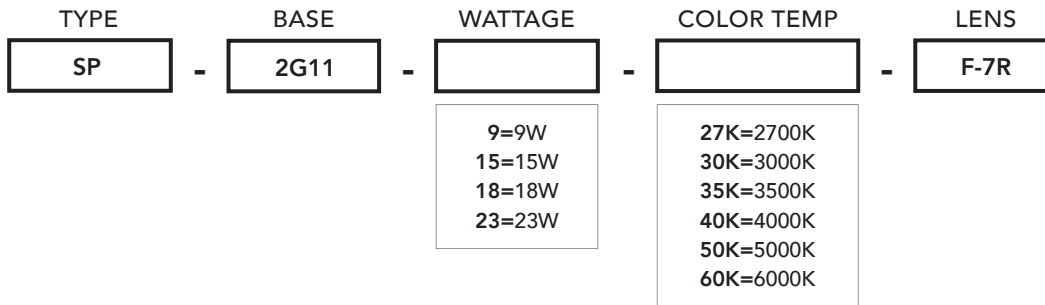

INSTALLATION NOTES

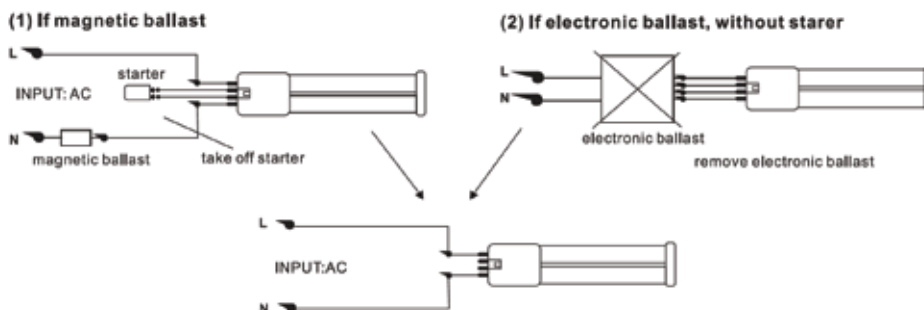

NOTE: Checking for room in the fixture before ordering is critical since there are many style fixtures that take the same PL lamps.